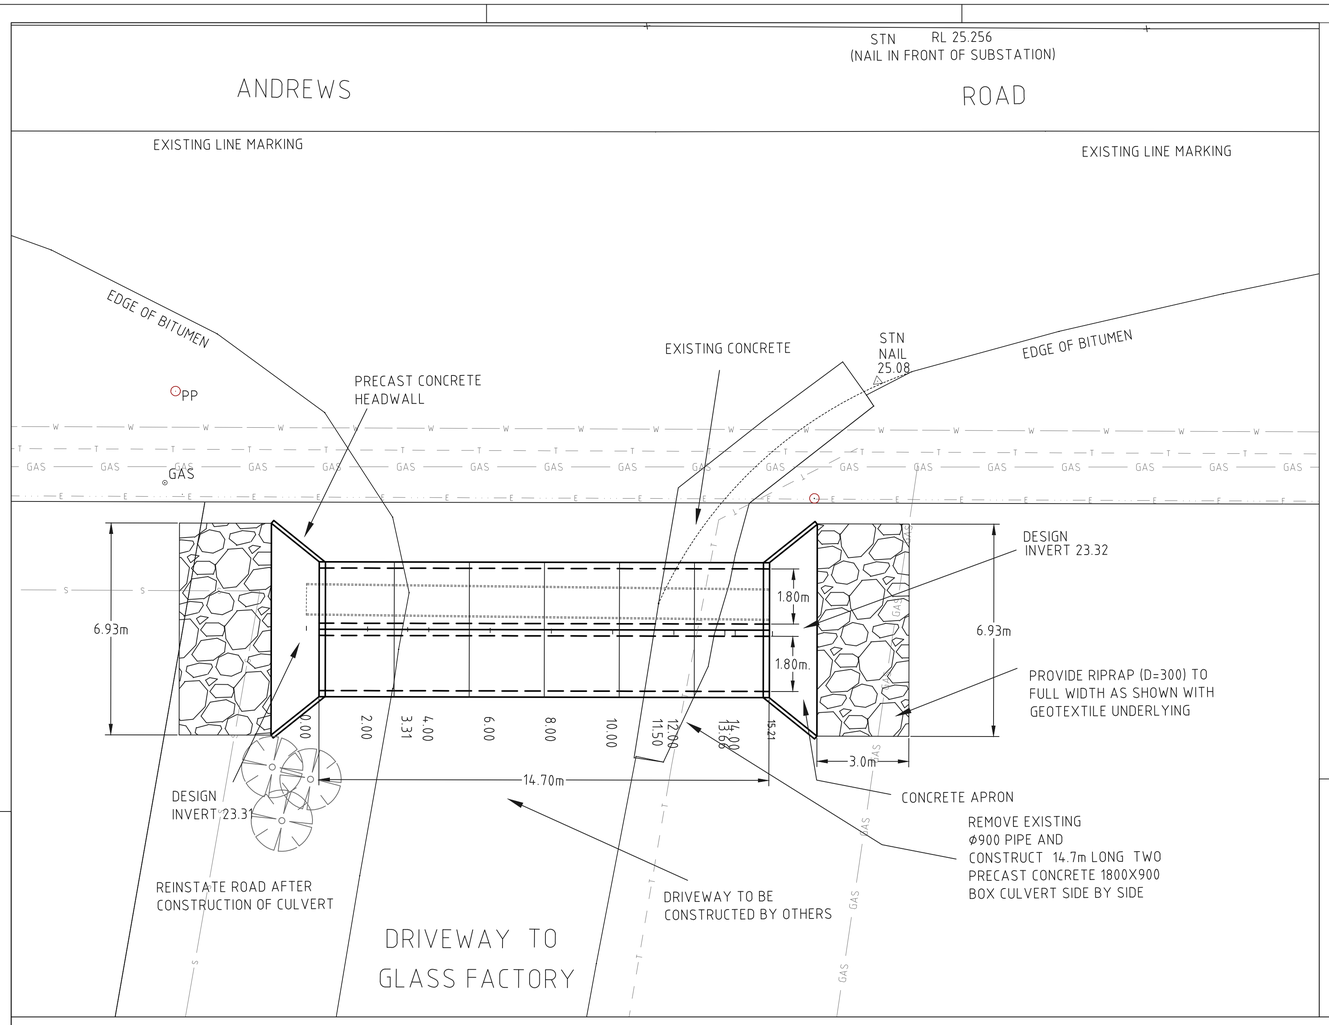

GENERAL NOTES:

1. ALL WORKS TO BE CARRIED OUT IN ACCORDANCE WITH GUIDELINES FOR ENG. WORKS FOR SUBDIVISIONS AND DEVELOPMENTS OF PENRITH CITY COUNCIL AND AS DIRECTED BY THE ENGINEER.
2. EROSION AND SEDIMENT CONTROL MEASURES ARE TO BE INSTALLED IN ACCORDANCE WITH THE NSW DEPARTMENT OF HOUSING PUBLICATION: "MANAGING URBAN STORMWATER, SOILS & CONSTRUCTION" AND IN ACCORDANCE WITH EPA REQUIREMENTS.
3. THE CONTRACTOR SHALL TAKE DUE CARE THAT ONLY THE ABSOLUTE MINIMUM AREA FOR CONSTRUCTION IS USED.
4. AFFECTED OWNERS/RESIDENTS TO BE ADVISED PRIOR TO ANY DISTURBANCE TO ASSETS.
5. NOTIFY RESIDENTS PRIOR TO COMMENCEMENT OF WORKS.
6. ALL CONCRETE WORKS TO BE CONSTRUCTED TO GRADE N32 CONCRETE U.N.O.
7. OBTAIN DIAL BEFORE YOU DIG PLANS AND ENSURE TO POT HOLE BEFORE THE COMMENCEMENT OF WORKS.
8. THE CONTRACTOR IS NOT TO ENTER UPON NOR DO ANY WORKS WITHIN ADJACENT LANDS WITHOUT THE WRITTEN PERMISSION OF THE LAND OWNER.
9. ALL FILLING TO BE COMPACTED TO A MINIMUM 95% OF THE STANDARD MAXIMUM DRY DENSITY AS TESTED IN ACCORDANCE WITH 5.1.1 OF AS1289-2000.
10. ALL FILL MATERIAL TO BE APPROVED BY THE CONSTRUCTION ENGINEER.
11. CONTRACTOR IS TO CLEAR SITE BY REMOVING ALL SURPLUS SPOIL, RUBBISH AND DEBRIS ETC.
12. PROVISION FOR TRAFFIC CONTROL DURING CONSTRUCTION TO BE IN ACCORDANCE WITH
13. MEASUREMENTS SHALL BE TAKEN FROM THE FIGURED DIMENSIONS AND ARE NOT TO BE SCALED FROM THE DRAWINGS.
14. ALL NEW WORKS TO MAKE SMOOTH JUNCTION WITH EXISTING CONDITIONS.
15. LOCATION OF SERVICES ARE APPROXIMATE ONLY AND ALL SERVICES MUST BE LOCATED IN LINE AND LEVEL BY THE CONTRACTOR PRIOR TO COMMENCEMENT OF CONSTRUCTION.
16. A MINIMUM 50mm GRANULAR BEDDING TO BE PROVIDED UNDER ALL CONCRETE.
17. SERVICES: UNDERGROUND SERVICE CATEGORIES REFERRED TO ON THESE PLANS ARE;
    CATEGORY 1 : SERVICE HAS BEEN PHYSICALLY LOCATED, EXPOSED AND LEVELLED.
    CATEGORY 2: SERVICE HAS BEEN LOCATED BY SURFACE FIXTURES AND / OR LOCATOR.
    CATEGORY 3: SERVICES ARE PLOTTED ON PLAN BASED ON THE INFORMATION OBTAINED FROM UTILITY AUTHORITY SERVICES PLANS ONLY.
    UNLESS NOTED OTHERWISE ON PLANS THE LOCATION OF ALL SERVICES SHALL BE ASSUMED TO BE CATEGORY 3.
18. CLEAR COVER TO ALL REINFORCEMENT SHALL BE 45mm.
19. REMOVE ALL UNSUITABLE MATERIAL AND REPLACE WITH COMPACTED AND APPROVED GRANULAR MATERIAL (MIN FILL OF 150mm) DURING CULVERT CONSTRUCTION.
20. GEOTEXTILE FILTER IS TO BE BIDIM34 OR APPROVED EQUIVALENT.

LOCALITY SKETCH
NOT TO SCALE



- 50 mm AC10 WEARING COURSE
- 2 COAT BITUMEN SEAL
- 150 mm DGB20 BASE COURSE
- 360 mm DGB40 SUB-BASE COURSE
- WELL COMPACTED CRUSHED SAND STONE (CBR>10) COMPACT IN 100mm LAYERS

PAVEMENT DETAILS FOR ROAD RESTORATION WORKS
NOT TO SCALE

CALL SYDNEY ONE CALL SERVICE TO OBTAIN UPDATED SERVICE LOCATIONS PRIOR TO COMMENCEMENT
SERVICES SHOWN ARE COMPILED FROM PLANS DATED 17/03/2015
DIAL 1100 BEFORE YOU DIG

ADVANCE COPY

NOT FOR CONSTRUCTION

PLAN
SCALE : 1 : 100 (A1)

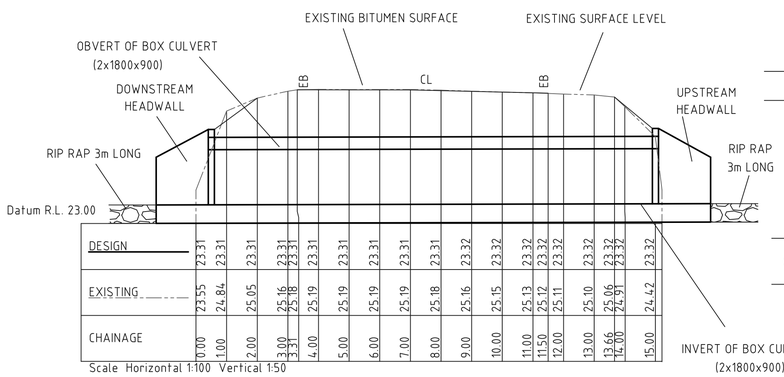

| | | |