

The Secretary
NSW Department of Planning, Industry and Environment


26 February 2021

ATTENTION: Patrick Copas, Industry Assessments, Planning and Assessment

Dear Sir or Madam

I refer to the Department's letter of 14 January 2021 regarding State Significant Development SSD 3846 West Culburra Mixed Use Subdivision regarding the amended plans arising from Sealark Pty Ltd v Independent Planning Commission – West Culburra Concept Proposal Land and Environment Court Proceedings No 2019/78149 for land north of Culburra Road and west of the Culburra Beach township (Part Lot 5 & Part Lot 6 of DP 1065111 and Part Lot 1 DP 631825) in the Shoalhaven City Local Government Area (LGA). Submissions need to be made to the Department by 26 February 2021.

As shown in the below site plans from Endeavour Energy's G/Net master facility model (and extracts from Google Maps Street View) the main features of the electricity infrastructure over the land are:

- An easement benefitting Endeavour Energy (indicated by red hatching) over the Culburra Treatment Works site for 11,000 volt / 11 kilovolt (kV) high voltage overhead power lines and a pole mounted substation (indicated by the symbol ).
- Low voltage and 11 kV high voltage underground overhead power lines with pole mounted substations to the road verges / roadways.

Please note the location, extent and type of any electricity infrastructure, boundaries etc. shown on the plan is indicative only. In addition it must be recognised that the electricity network is constantly extended, augmented and modified and there is a delay from the completion and commissioning of these works until their capture in the model. Generally (depending on the scale and/or features selected), low voltage (normally not exceeding 1,000 volts) is indicated by blue lines and high voltage (normally exceeding 1,000 volts but for Endeavour Energy's network not exceeding 132,000 volts / 132 kV) by red lines (these lines can appear as solid or dashed and where there are multiple lines / cables only the higher voltage may be shown). This plan only shows the Endeavour Energy network and does not show electricity infrastructure belonging to other authorities or customers owned electrical equipment beyond the customer connection point / point of supply to the property. This plan is not a 'Dial Before You Dig' plan under the provisions of Part 5E 'Protection of underground electricity power lines' of the Electricity Supply Act 1995 (NSW).

Subject to the following recommendations and comments Endeavour Energy has no objection to the Development Application.

- Network Capacity / Connection

Endeavour Energy has noted that the Environmental Impact Statement includes the following advice regarding whether electricity services are available and adequate for the development.

4.19. Infrastructure Assessment

APS has prepared an updated Infrastructure Assessment Report (**Appendix 29**) which relates to the revised Proposal and preliminary engineering plans (**Appendix 30**). This report also addresses relevant DGRs.

The report concludes that all relevant infrastructure will be available and provision of all essential services (water, sewer, electricity) are on track and will not be a constraint to the timing or delivery of the Proposal.

Endeavour Energy is able to supply the expected electrical demand through its existing network and through upgrades that will be funded by both the developer and Endeavour Energy. A new zone substation will likely need to be delivered at some stage in the future. Electrical reticulation infrastructure will be provided throughout the development by the developer in accordance with the requirements of Endeavour Energy.


The Infrastructure Assessment Report includes as Appendix 5 Endeavour Energy response to Technical Enquiry Review being ENL3632 – LOT 5 & 6, DP 1065111, Off Culburra Road, WEST CULBURRA BEACH dated 20 February 2020.

Endeavour Energy's Asset Planning & Performance Branch has provided the following updated advice.


Whilst Endeavour Energy has previously provided advice that indicated a new small 33kV zone substation is required, a combination of advance in technology and reduce scale of development may mean it is possible to consider an alternate solution involving distributed energy resources (such as solar generation and community battery storage), potentially avoiding the need for the new transmission line and substation. The new subdivision would still be connected to the Endeavour Energy network. We would welcome discussions with the developer and Council about the alternate energy solutions.

However, in the interim provision for a new zone substation and supply line still needs to be made. In this regard the updated Concept Plan no longer shows 'Zone Substation' on Industrial Land Lot 313 (5783 m²) on eastern side of Strathstone Street.

Appendix 1 Concept Plan

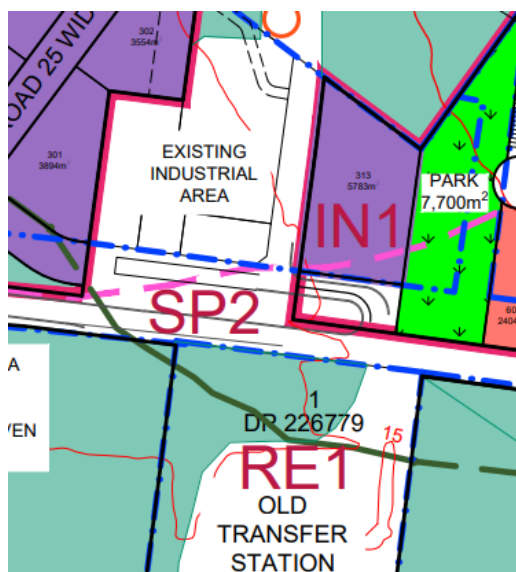

Appendix 7 Previous Concept Plan

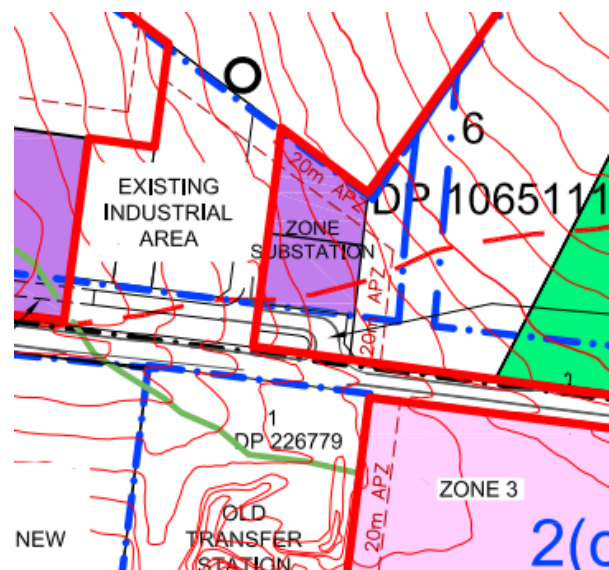

In addition to a possible zone substation, distribution substations are required to transform the high voltage of the distribution feeder (usually at 11,000 volts / 11 kV) to the secondary system voltage (400/230 volts) to supply customers / developments. Distribution substations are divided into ground mounted substations most commonly being a padmount substations installed a complete unit on a concrete foundation / plinth and usually associated with underground distribution and pole mounted substations where there is overhead distribution.

Pole mounted substations used in older and non-urban parts of the network have comparatively limited capacity of 16 kilovolt amperes (kVA) up to a maximum of 400 kVA. Padmount substations used in newer urban development can accommodate loads from 315 kVA up to 1,500 kVA (typically 500 kVA). Accordingly there is a significant variation in the number and type of premises able to be connected to a substation ie. a single distribution substation may serve one large building, or many homes.

In due course the applicant for the proposed development of sites within the lands will need to submit an appropriate application based on the maximum demand for electricity for connection of load via Endeavour Energy's Network Connections Branch to carry out the final load assessment and the method of supply will be determined. Straightforward applications can be completed online and permission to connect may be provided immediately if submitting a complying application.

Depending on the outcome of the assessment, any required padmount substation/s will need to be located within the property (in a suitable and accessible location) and be protected (including any associated cabling) by an easement and associated restrictions benefiting and gifted to Endeavour Energy. Please refer to Endeavour Energy's Mains Design Instruction MDI 0044 'Easements and Property Tenure Rights'.

For more complex connections, advice on the electricity infrastructure required to facilitate the proposed development (including asset relocations) can be obtained by submitting a Technical Review Request to Endeavour Energy's Network Connections Branch, the form for which FPJ6007 is attached. The response to these enquiries is based upon a desktop review of corporate information systems, and as such does not involve the engagement of various internal stakeholders in order to develop a 'Connection Offer'. It does provide details of preliminary connection requirements which can be considered by the applicant prior to lodging a formal application for connection of load.

Further details are available by contacting Endeavour Energy's Network Connections Branch via Head Office enquiries on business days on telephone: 133 718 or (02) 9853 6666 from 9am - 4:30pm or on Endeavour Energy's website under 'Home > Residential and business > Connecting to our network' via the following link:

<http://www.endeavourenergy.com.au/> .

Alternatively the applicant may need to engage an Accredited Service Provider (ASP) of an appropriate level and class of accreditation to assess the electricity load and the proposed method of supply for the development. The ASP scheme is administered by Energy NSW and details are available on their website via the following link or telephone 13 77 88:

<https://energy.nsw.gov.au/government-and-regulation/legislative-and-regulatory-requirements/asp-scheme-and-contestable-works> .

Endeavour Energy is urging applicants /customers to engage with an Electrical Consultant prior to finalising plans to in order to assess and incorporate any required electricity infrastructure. In so doing the consideration can also be given to its impact on the other aspects of the proposed development. This can assist in avoiding the making of amendments to the plan or possibly the need to later seek modification of an approved development application.

- Network Asset Design

Endeavour Energy's Company Policy 9.2.5 'Network Asset Design', includes the following requirements for electricity connections to new urban subdivision / development:

5.11 Reticulation policy

5.11.1 Distribution reticulation

In order to improve the reliability performance of and to reduce the operating expenditure on the network over the long term the company has adopted the strategy of requiring new lines to be either underground cables or where overhead is permitted, to be predominantly of covered or insulated construction. Notwithstanding this strategy, bare wire overhead construction is appropriate and permitted in some situations as detailed below.

In areas with the potential for significant overhanging foliage, CCT is used to provide increased reliability as it is less susceptible to outages from wind-blown branches and debris than bare conductors. CCT must only be used in treed² areas as the probability of a direct lightning strike is low. In open areas where the line is not shielded from a direct lightning strike, bare conductors must generally be used for 11kV and 22kV reticulation.

Non-metallic Screened High Voltage Aerial Bundled Cable (NMSHVABC) must be used in areas which are heavily treed and where it is not practicable to maintain a tree clearing envelope around the conductors.

² A "treed" area is one with a substantial number of trees adjacent to the line, in each span. In these situations CCT is used to provide increased reliability as it is less susceptible to outages from wind-blown

5.11.1.1 Urban areas

Reticulation of new residential subdivisions will be underground. In areas of low bushfire consequence, new lines within existing overhead areas can be overhead, unless underground lines are cost justified or required by either environmental or local council requirements.

Where underground reticulation is required on a feeder that supplies a mixture of industrial, commercial and/or residential loads, the standard of underground construction will apply to all types of load within that development.

Where ducting is used, adequate spare ducts and easements must be provided at the outset to cover the final load requirements of the entire development plan.

Extensions to the existing overhead 11kV/22kV network must generally be underground. Bare wire will be used for conductor replacements and augmentations except in treed areas where CCT or NMSHVABC must be used.

Extensions to the existing overhead LV network and augmentations must either be underground or ABC. Conductor replacements greater than 100m in route length must utilise aerial bundled cable.

- Streetlighting

With the increase in both vehicular and pedestrian traffic, the streetlighting for the proposed development should be reviewed and if necessary upgraded to comply with the series of standards applying to the lighting of roads and public spaces set out in with Australian/New Zealand Standard AS/NZS 1158: 2010 'Lighting for roads and public spaces' as updated from time to time.

Whilst the determination of the appropriate lighting rests with the road controlling authority, Endeavour Energy as a Public Lighting Service Provider is responsible for operating and maintaining the streetlights on behalf of local councils, Roads and Maritime Services and other utilities in accordance with the NSW Public Lighting Code 2019 (Code) as updated from time to time. Endeavour Energy recognises that well designed, maintained and managed Public Lighting offers a safe, secure and attractive visual environment for pedestrians and drivers during times of inadequate natural light.

For any Code implementation and administration / technical matters please contact Endeavour Energy's Substation Mains Assets Section via Head Office enquiries on business days on telephone: 133 718 or (02) 9853 6666 from 9am - 4:30pm or email mainsenquiry@endeavourenergy.com.au.

- Bushfire

Endeavour Energy has noted the Environmental Impact Statement indicates 'An accompanying Bushfire Protection Assessment is provided and demonstrates how proposal meets requirements of Planning for Bushfire Protection 2006 and 2019' which includes the following advice:

3.5 Services – Water, electricity and gas

3.5.2 Electricity services

Electricity supply to / within the subject land is located underground and therefore complies with Section 4.1.3 of PBP.

Although industrial uses are not covered by Chapters 5 to 7 of NSW Rural Fire Service ‘Planning for Bush Fire Protection 2019’ (PBP), the aim and objectives of PBP still need to be considered and a suitable package of bush fire protection measures should be proposed commensurate with the assessed level of risk to the development. PBP provides the following advice regarding electricity services:

6.8.3 Services – Water, gas and electricity

Intent of measures: to provide adequate services of water for the protection of buildings during and after the passage of a bush fire, and to locate gas and electricity so as not to contribute to the risk of fire to a building.

Table 6.8c

Performance criteria and acceptable solutions for water, electricity and gas services for SFPP development.

PERFORMANCE CRITERIA		ACCEPTABLE SOLUTIONS	
The intent may be achieved where:			
ELECTRICITY SERVICES	➤ location of electricity services limits the possibility of ignition of surrounding bush land or the fabric of buildings.	➤ where practicable, electrical transmission lines are underground;	
		➤ where overhead, electrical transmission lines are proposed as follow:	
		➤ lines are installed with short pole spacing (30m), unless crossing gullies, gorges or riparian areas; and	
		➤ no part of a tree is closer to a power line than the distance set out in accordance with the specifications in ISSC3 <i>Guideline for Managing Vegetation Near Power Lines</i> .	

The following is an extract of Endeavour Energy’s Company Policy 9.1.1 Bushfire Risk Management:

9.1.1 BUSHFIRE RISK MANAGEMENT

1.0 POLICY STATEMENT

The company is committed to the application of prudent asset management strategies to reduce the risk of bushfires caused by network assets and aerial consumer mains to as low as reasonably practicable (ALARP) level. The company is also committed to mitigating, the associated risk to network assets and customer supply reliability during times of bushfire whilst achieving practical safety, reliability, quality of supply, efficient investment and environmental outcomes. The company is committed to compliance with relevant acts, regulations and codes.

Accordingly the electricity network required to service the proposed development must be fit for purpose and meet the technical specifications, design, construction and commissioning standards based on Endeavour Energy’s risk assessment associated with the implementation and use of the network connection / infrastructure for a bushfire prone site. In assessing bushfire risk, Endeavour Energy has traditionally focused on the likelihood of its network starting a bushfire, which is a function of the condition of the network. Risk control has focused on reducing the likelihood of fire ignition by implementing good design and maintenance practices. However the potential impact of a bushfire on its electricity infrastructure and the safety risks associated with the loss of electricity supply are also considered.

- Flooding and Drainage

Endeavour Energy has noted that the Environmental Impact Statement indicates that ‘The site is identified as being flood prone’.

Endeavour Energy requires the electricity network needed to service an area / development to be fit for purpose and meet the technical specifications, design, construction and commissioning standards based on Endeavour Energy’s risk assessment associated with the implementation and use of the network connection / infrastructure for a flood prone site. Risk control has focused typically on avoiding the threat, but where this is not possible, reducing the negative effect or probability of flood damage to assets by implementing good design and maintenance practices.

Distribution substations should not be subject to flood inundation or stormwater runoff ie. the padmount substation cubicles are weatherproof not flood proof and the cable pits whilst designed to be self-draining should not be subject to excessive ingress of water. Section 7 'Substation and switching stations' of Endeavour Energy's Mains Construction Instruction MCI 0006 'Underground distribution construction standards manual' provides the following details of the requirements for flooding and drainage in new padmount substation locations.

7.1.6 Flooding and drainage

Substations are to be located such that the risk of flooding or stormwater damage is minimal.

As a minimum the level at the top of the transformer footing, HV and LV switchgear, shall not be lower than the 1:100 year flood level.

All drains within the substation site area or in the vicinity shall be properly maintained to avoid the possibility of water damage to Endeavour Energy's equipment.

In areas where, as determined by the Network Substation Manager, there is a high water table or a heightened risk of flooding, indoor substations will not be permitted.

All materials used in the construction below the substation (ground level) shall be capable of withstanding prolonged immersion in water without swelling or deterioration.



Figure 51 - Example substation raised above 1:100 flood level

- Earthing

The construction of any building or structure (including fencing, signage, flag poles, hoardings, material stockpiles etc.) whether temporary or permanent that is connected to or in close proximity to Endeavour Energy's electrical network is required to comply with Australian/New Zealand Standard AS/NZS 3000:2018 'Electrical installations' as updated from time to time. This Standard sets out requirements for the design, construction and verification of electrical installations, including ensuring there is adequate connection to the earth. It applies to all electrical installations including temporary builder's supply / connections.

Inadequate connection to the earth to allow a leaking / fault current to flow into the grounding system and be properly dissipated places persons, equipment connected to the network and the electricity network itself at risk from electric shock, fire and physical injury. The earthing system is usually in the form of an earth electrode consisting of earth rods or mats buried in the ground. It should be designed by a suitably qualified electrical engineer / Accredited Service Provider (ASP) following a site-specific risk assessment having regard to the potential number of people could be simultaneously exposed, ground resistivity etc.

For details of the ASP scheme please refer to the above point 'Network Capacity / Connection'.

- Safety Clearances

As a minimum any building or structure (including fencing, signage, flag poles etc.) whether temporary or permanent must comply with the minimum safe distances / clearances for voltages up to and including 132,000 volts (132 kV) as specified in:

- Australian/New Zealand Standard AS/NZS 7000 – 2016: 'Overhead line design' as updated from time to time.
- 'Service and Installation Rules of NSW' which can be accessed via the following link to the Energy NSW website:

<https://energy.nsw.gov.au/government-and-regulation/legislative-and-regulatory-requirements/service-installation-rules> .

These distances must be maintained at all times and regardless of the Council's allowable building setbacks etc. under its development controls. As a guide only please find attached a copy of Endeavour Energy Drawing 86232 'Overhead Lines Minimum Clearances Near Structures'. Factors such as the span (the longer the span the greater the sag and blowout of the overhead power lines), type of conductor, access, property type and use etc. will impact on the minimum clearances.

If there is any doubt whatsoever regarding the safety clearances to the overhead power lines, the applicant will need to have the safety clearances assessed by a suitably qualified electrical engineer / Accredited Service Provider (please refer to the below point 'Network Capacity / Connection'. This will require the provision of a detailed survey plan showing the location of the conductors to enable the assessment / modelling of the clearances for which there are software packages available. If the safety clearances are inadequate, either the parts of the building encroaching the required clearances or the overhead power lines will need to be redesigned to provide the required clearances.

Even if there is no issue with the safety clearances to the building or structure, ordinary persons must maintain a minimum safe approach distance of 3.0 metres to all voltages up to and including 132,000 volts / 132 kV. Work within the safe approach distances requires an authorised or instructed person with technical knowledge or sufficient experience to perform the work required, a safety observer for operating plant as well as possibly an outage request and/or erection of a protective hoarding.

Endeavour Energy's recommendation is that whenever reasonably possible buildings and structures be located and designed to avoid the need to work within the safe approach distances for ordinary persons eg. not having parts of the building normally accessible to persons in close proximity of the overhead power lines; the use of durable / low maintenance finishes. Alternatively, in some instances the adoption of an underground solution may be warranted ie. particularly for low voltage which can be more readily (in shorter distances) and comparatively economically be undergrounded.

- Easement Management / Network Access

The following is a summary of the usual / main terms of Endeavour Energy's electrical easements requiring that the landowner:

- Not install or permit to be installed any buildings, structures or services within the easement site.
- Not alter the surface level of the easement site.
- Not do or permit to be done anything that restricts access to the easement site without the prior written permission of Endeavour Energy and in accordance with such conditions as Endeavour Energy may reasonably impose.

Endeavour Energy's preference is for no activities or encroachments to occur within its easements. However, if any proposed works or activities (other than those approved / certified by Endeavour Energy's Network Connections Branch as part of an enquiry / application for load or asset relocation project) will encroach / affect Endeavour Energy's easements, contact must first be made with the Endeavour Energy's Easements Officer, Jennie Saban, on business days on mobile 0417484402 or alternately via email Jennie.Saban@endeavourenergy.com.au or Easements@endeavourenergy.com.au .

Please find attached for the applicant's reference a copy of Endeavour Energy's Mains Design Instruction MDI 0044 'Easements and Property Tenure Rights' which deals with activities / encroachments within easements.

It is imperative that the access to the existing electrical infrastructure on and in proximity of the site be maintained at all times. To ensure that supply electricity is available to the community, access to the electricity infrastructure may be required at any time. Restricted access to electricity infrastructure by electricity workers causes delays in power restoration and may have severe consequences in the event of an emergency. This is particularly important where there are poles or towers as in the event of fallen conductors, access to the resting overhead power lines will be required by electricity workers with heavy vehicles, machinery and materials essential for restoring electricity supply.

- Location of Electricity Easements

Endeavour Energy's preference is to have continuity of its easements over the most direct and practicable route affecting the least number of lots as possible. The incorporation of electricity easements into privately owned lots is generally problematic for both Endeavour Energy and the future landowners and requires additional easement management to ensure no uncontrolled activities / encroachments occur within the easement. Therefore it generally does not support the incorporation of easements into multiple / privately owned lots.

Accordingly Endeavour Energy's recommendation is that whenever reasonably possible, easements be entirely incorporated into public reserves and not burden private lots (except where they are remnant lots or not subject to development).

This is also in keeping with a policy of prudent avoidance which has been adopted by the electricity industry and involves doing what can be done without undue inconvenience and at modest expense to avert the possible risk to health from exposure to emissions from electricity infrastructure such as electric and magnetic fields (EMF) and noise which generally increase the higher the voltage ie. Endeavour Energy's network ranges from low voltage (normally not exceeding 1,000 volts) to high voltage (normally exceeding 1,000 volts but not exceeding 132,000 volts / 132 kV).

In practical terms this means that when designing new transmission and distribution facilities, consideration is given to reducing exposure and increasing separation distances to more sensitive uses such as residential or schools, pre-schools, day care centres or where potentially a greater number of people are regularly exposed for extended periods of time.

These emissions are usually not an issue but with Council's permitting or encouraging development with higher density, reduced setbacks and increased building heights, but as the electricity network operates 24/7/365 (all day, every day of the year), the level of exposure can increase.

Endeavour Energy believes that irrespective of the zoning or land use, applicants (and Council) should also adopt a policy of prudent avoidance by the siting of more sensitive uses eg. the office component of an industrial building, away from and less susceptible uses such as garages, non-habitable or rooms not regularly occupied eg. storage areas in a commercial building, towards any electricity infrastructure – including any possible future electricity infrastructure required to facilitate the proposed development.

Where development is proposed near electricity infrastructure, Endeavour Energy is not responsible for any amelioration measures for such emissions that may impact on the nearby proposed development.

Please find attached a copy of Energy Networks Association's 'Electric & Magnetic Fields – What We Know' which can also be accessed via their website at <https://www.energynetworks.com.au/electric-and-magnetic-fields> and provides the following advice:

Electric fields are strongest closest to their source, and their strength diminishes rapidly as we move away from the source.

The level of a magnetic field depends on the amount of the current (measured in amps), and decreases rapidly once we move away from the source.

Typical magnetic field measurements associated with Endeavour Energy's activities and assets given the required easement widths, safety clearances etc. and having a maximum voltage of 132,000 volt / 132 kV, will with the observance of these separation distances not exceed the recommended magnetic field public exposure limits.

- Vegetation Management

The planting of large trees near electricity infrastructure is not supported by Endeavour Energy. Particularly for overhead power lines, ongoing vegetation management / tree trimming is a significant network cost and falling trees and branches during storms are a major cause of power outages.

Suitable planting needs to be undertaken in proximity of electricity infrastructure (including any new electricity infrastructure required to facilitate the proposed development). Only low growing shrubs not exceeding 3.0 metres in height, ground covers and smaller shrubs, with non-invasive root systems are the best plants to use. Larger trees should be planted well away from electricity infrastructure (at least the same distance from overhead power lines as their potential full grown height) and even with underground cables, be installed with a root barrier around the root ball of the plant.

Landscaping that interferes with electricity infrastructure may become a potential safety risk, cause of bush fire, restrict access, reduce light levels from streetlights or result in the interruption of supply. Such landscaping may be subject to Endeavour Energy's Vegetation Management program and/or the provisions of the Electricity Supply Act 1995 (NSW) Section 48 'Interference with electricity works by trees' by which under certain circumstances the cost of carrying out such work may be recovered.

Endeavour Energy's recommendation is that existing trees which are of low ecological significance in proximity of overhead power lines be removed and if necessary replaced by an alternative smaller planting to ensure appropriate clearances are maintained whilst minimising the need for future pruning.

- Dial Before You Dig

Before commencing any underground activity the applicant is required to obtain advice from the **Dial Before You Dig 1100** service in accordance with the requirements of the Electricity Supply Act 1995 (NSW) and associated Regulations. This should be obtained by the applicant not only to identify the location of any underground electrical and other utility infrastructure across the site, but also to identify them as a hazard and to properly assess the risk.

- Removal of Electricity Supply

Approval for the permanent disconnection and removal of supply must be obtained from Endeavour Energy's Network Connections Branch (contact via Head Office enquiries on business days from 9am - 4:30pm on telephone: 133 718 or (02) 9853 6666) by Accredited Service Providers (ASP) with the relevant class of Authorisation for the type of work being carried out. The work could involve:

- The disconnection and removal of an underground service cable or overhead service line,
- Removal of metering equipment.

The written request must be submitted to Endeavour Energy using Form FPJ4603 'Permission to Remove Service / Metering by Authorised Level 2 Accredited Service Provider' which must be accompanied by Notification of Service Works (NOSW) forms provided as a result of service work activity performed by a Level 2 ASP. The retailer must also provide written agreement for the permanent removal of supply.

For details of the ASP scheme please refer to the above point 'Network Capacity / Connection'.

- Demolition

Demolition work is to be carried out in accordance with Australian Standard AS 2601—2001: 'The demolition of structures' as updated from time to time. All electric cables or apparatus which are liable to be a source of danger, other than a cable or apparatus used for the demolition works shall be disconnected ie. all electrical apparatus shall be regarded as live until isolated and proved de-energised by approved means.

Depending on the extent of the demolition works, the low voltage service conductor and customer connection may need to be isolated and/or removed during demolition. Please refer to the below point 'Removal of Electricity Supply' for further information.

Appropriate care must be taken to not otherwise interfere with any electrical infrastructure on or in the vicinity of the site eg. streetlight columns, power poles, overhead power lines and underground cables etc.

- Site Remediation

Endeavour Energy's Environmental Business Partner Team have advised that the remediation of soils or surfaces impacted by various forms of electricity infrastructure is not uncommon but is usually not significant eg. transformer oil associated with leaking substations, pole treatment chemicals at the base of timber poles etc. The method of remediation is generally the removal of the electricity infrastructure, removal of any stained surfaces or excavation of any contaminated soils and their disposal at a licensed land fill. The decommissioning and removal of the redundant electricity infrastructure will be dealt with by Endeavour Energy's Network Connections Branch as part of the application for the connection of load for the new development – please refer to the above point 'Network Capacity / Connection'.

If the applicant has any concerns over the remediation works related to redundant electricity infrastructure they should contact Environmental Business Partner Team via Head Office enquiries on business days from 9am - 4:30pm on telephone: 133 718 or (02) 9853 6666.

- Public Safety

Workers involved in work near electricity infrastructure run the risk of receiving an electric shock and causing substantial damage to plant and equipment. Please find attached copies of Endeavour Energy's public safety training resources, which were developed to help general public / workers to understand why you may be at risk and what you can do to work safely. The public safety training resources are also available via Endeavour Energy's website via the following link:

<http://www.endeavourenergy.com.au/wps/wcm/connect/ee/nsw/nsw+homepage/communitynav/safety/safety+brochures>.

If the applicant has any concerns over the proposed works in proximity of the Endeavour Energy's electricity infrastructure to the road verge / roadway, as part of a public safety initiative Endeavour Energy has set up an email account that is accessible by a range of stakeholders across the company in order to provide more effective lines of communication with the general public who may be undertaking construction activities in proximity of electricity infrastructure such as builders, construction industry workers etc. The email address is Construction.Works@endeavourenergy.com.au.

- Emergency Contact

In case of an emergency relating to Endeavour Energy's electrical network, the applicant should note the Emergencies Telephone is 131 003 which can be contacted 24 hours / 7 days. Endeavour Energy's contact details should be included in any relevant risk and safety management plan.

I appreciate that not all the foregoing issues may be directly or immediately relevant or significant to Development Application. However Endeavour Energy's preference is to alert proponents / applicants of the potential matters that may arise should development within closer proximity of the existing and/or required electricity infrastructure needed to facilitate the proposed development on or in the vicinity of the site occur.

Could you please pass on a copy of this submission and the attached resources to the applicant? Should you wish to discuss this matter, or have any questions, please do not hesitate to contact me or the contacts identified above in relation to the various matters. Due to the high number of development application / planning proposal notifications submitted to Endeavour Energy, to ensure a response contact by email to property.development@endeavourenergy.com.au is preferred.

With the current easing of the COVID-19 health risk, whilst a significant number of Endeavour Energy staff are returning to the office they are at times still working from home. Although working from home, access to emails and other internal stakeholders can still be somewhat limited and as a result it may take longer than usual to respond to enquiries. Thank you for your ongoing understanding during this time.

Yours faithfully

Cornelis Duba

Development Application Specialist

Network Environment & Assessment

M: 0455 250 981


E: cornelis.duba@endeavourenergy.com.au

51 Huntingwood Drive, Huntingwood NSW 2148

www.endeavourenergy.com.au



PROPOSED MIXED USE CONCEPT PLAN

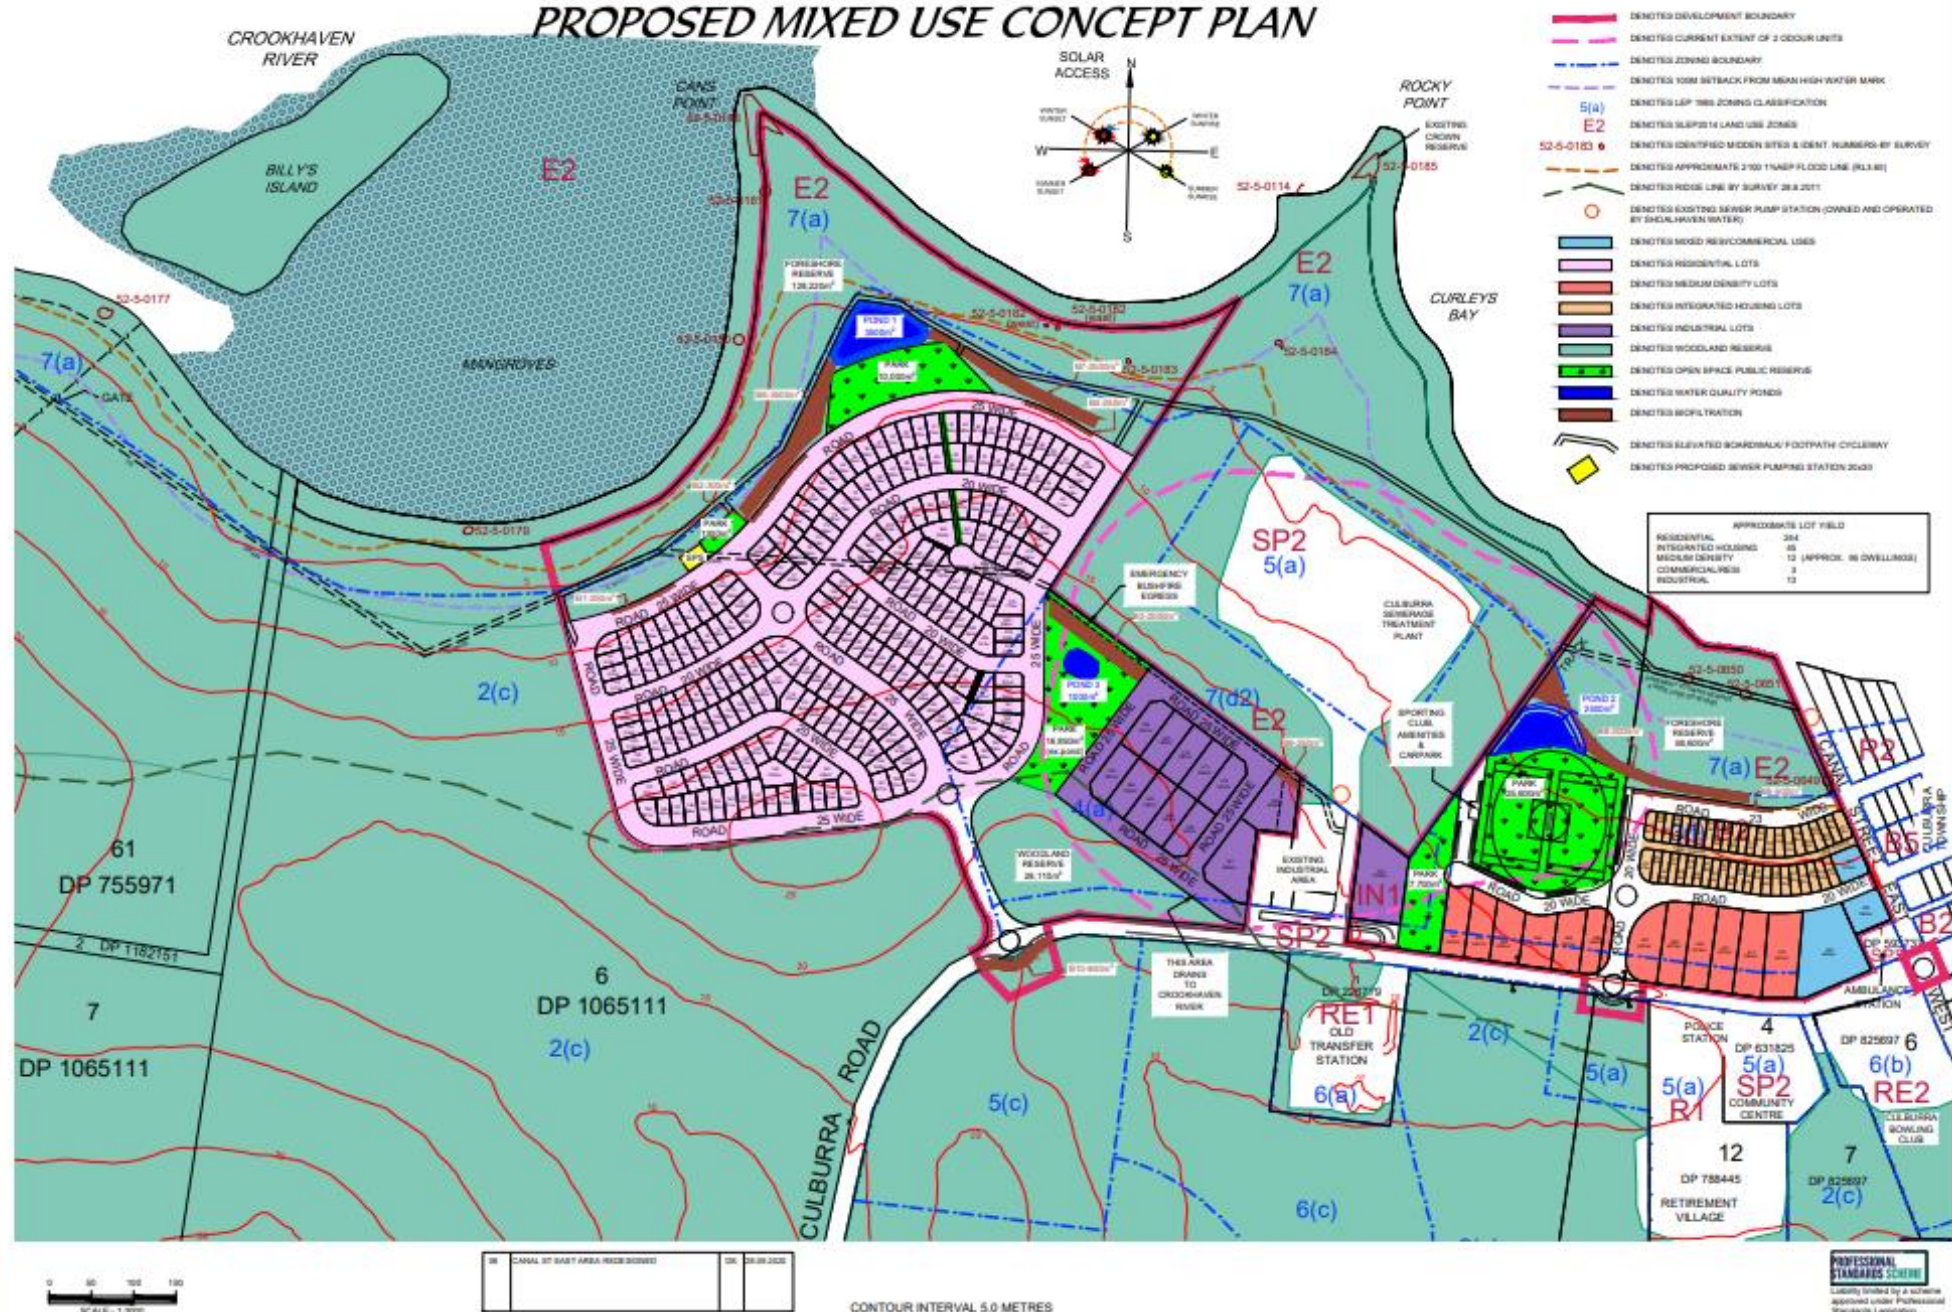

RATIO 1:3000 (AT A1 ORIGINAL) (1:3000 AT A3)	DATE AUSTRALIAN HEIGHT DATUM ORIGIN: SSM RL	SURVEY DESIGN DRAWN CHECKED	REVISION 01 02 03 04 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1041 1042 1043 1044 1045 1046 1047 1048 1049 1050 1051 1052 1053 1054 1055 1056 1057 1058 1059 1060 1061 1062 1063 1064 1065 1066 1067 1068 1069 1070 1071 1072 1073 1074 1075 1076 1077 1078 1079 1080 1081 1082 1083 1084 1085 1086 1087 1088 1089 1090 1091 1092 1093 1094 1095 1096 1097 1098 1099 1100 1101 1102 1103 1104 1105 1106 1107 1108 1109 1110 1111 1112 1113 1114 1115 1116 1117 1118 1119 1120 1121 1122 1123 1124 1125 1126 1127 1128 1129 1130 1131 1132 1133 1134 1135 1136 1137 1138 1139 1140 1141 1142 1143 1144 1145 1146 1147 1148 1149 1150 1151 1152 1153 1154 1155 1156 1157 1158 1159 1160 1161 1162 1163 1164 1165 1166 1167 1168 1169 1170 1171 1172 1173 1174 1175 1176 1177 1178 1179 1180 1181 1182 1183 1184 1185 1186 1187 1188 1189 1190 1191 1192 1193 1194 1195 1196 1197 1198 1199 1200 1201 1202 1203 1204 1205 1206 1207 1208 1209 1210 1211 1212 1213 1214 1215 1216 1217 1218 1219 1220 1221 1222 1223 1224 1225 1226 1227 1228 1229 1230 1231 1232 1233 1234 1235 1236 1237 1238 1239 1240 1241 1242 1243 1244 1245 1246 1247 1248 1249 1250 1251 1252 1253 1254 1255 1256 1257 1258 1259 1260 1261 1262 1263 1264 1265 1266 1267 1268 1269 1270 1271 1272 1273 1274 1275 1276 1277 1278 1279 1280 1281 1282 1283 1284 1285 1286 1287 1288 1289 1290 1291 1292 1293 1294 1295 1296 1297 1298 1299 1300 1301 1302 1303 1304 1305 1306 1307 1308 1309 1310 1311 1312 1313 1314 1315 1316 1317 1318 1319 1320 1321 1322 1323 1324 1325 1326 1327 1328 1329 1330 1331 1332 1333 1334 1335 1336 1337 1338 1339 1340 1341 1342 1343 1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383 1384 1385 1386 1387 1388 1389 1390 1391 1392 1393 1394 1395 1396 1397 1398 1399 1400 1401 1402 1403 1404 1405 1406 1407 1408 1409 1410 1411 1412 1413 1414 1415 1416 1417 1418 1419 1420 1421 1422 1423 1424 1425 1426 1427 1428 1429 1430 1431 1432 1433 1434 1435 1436 1437 1438 1439 1440 1441 1442 1443 1444 1445 1446 1447 1448 1449 1450 1451 1452 1453 1454 1455 1456 1457 1458 1459 1460 1461 1462 1463 1464 1465 1466 1467 1468 1469 1470 1471 1472 1473 1474 1475 1476 1477 1478 1479 1480 1481 1482 1483 1484 1485 1486 1487 1488 1489 1490 1491 1492 1493 1494 1495 1496 1497 1498 1499 1500 1501 1502 1503 1504 1505 1506 1507 1508 1509 1510 1511 1512 1513 1514 1515 1516 1517 1518 1519 1520 1521 1522 1523 1524 1525 1526 1527 1528 1529 1530 1531 1532 1533 1534 1535 1536 1537 1538 1539 1540 1541 1542 1543 1544 1545 1546 1547 1548 1549 1550 1551 1552 1553 1554 1555 1556 1557 1558 1559 1560 1561 1562 1563 1564 1565 1566 1567 1568 1569 1570 1571 1572 1573 1574 1575 1576 1577 1578 1579 1580 1581 1582 1583 1584 1585 1586 1587 1588 1589 1590 1591 1592 1593 1594 1595 1596 1597 1598 1599 1600 1601 1602 1603 1604 1605 1606 1607 1608 1609 1610 1611 1612 1613 1614 1615 1616 1617 1618 1619 1620 1621 1622 1623 1624 1625 1626 1627 1628 1629 1630 1631 1632 1633 1634 1635 1636 1637 1638 1639 1640 1641 1642 1643 1644 1645 1646 1647 1648 1649 1650 1651 1652 1653 1654 1655 1656 1657 1658 1659 1660 1661 1662 1663 1664 1665 1666 1667 1668 1669 1670 1671 1672 1673 1674 1675 1676 1677 1678 1679 1680 1681 1682 1683 1684 1685 1686 1687 1688 1689 1690 1691 1692 1693 1694 1695 1696 1697 1698 1699 1700 1701 1702 1703 1704 1705 1706 1707 1708 1709 1710 1711 1712 1713 1714 1715 1716 1717 1718 1719 1720 1721 1722 1723 1724 1725 1726 1727 1728 1729 1730 1731 1732 1733 1734 1735 1736 1737 1738 1739 1740 1741 1742 1743 1744 1745 1746 1747 1748 1749 1750 1751 1752 1753 1754 1755 1756 1757 1758 1759 1760 1761 1762 1763 1764 1765 1766 1767 1768 1769 1770 1771 1772 1773 1774 1775 1776 1777 1778 1779 1780 1781 1782 1783 1784 1785 1786 1787 1788 1789 1790 1791 1792 1793 1794 1795 1796 1797 1798 1799 1800 1801 1802 1803 1804 1805 1806 1807 1808 1809 1810 1811 1812 1813 1814 1815 1816 1817 1818 1819 1820 1821 1822 1823 1824 1825 1826 1827 1828 1829 1830 1831 1832 1833 1834 1835 1836 1837 1838 1839 1840 1841 1842 1843 1844 1845 1846 1847 1848 1849 1850 1851 1852 1853 1854 1855 1856 1857 1858 1859 1860 1861 1862 1863 1864 1865 1866 1867 1868 1869 1870 1871 1872 1873 1874 1875 1876 1877 1878 1879 1880 1881 1882 1883 1884 1885 1886 1887 1888 1889 1890 1891 1892 1893 1894 1895 1896 1897 1898 1899 1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 223
---	--	--	---







Low voltage and 11 kV high voltage overhead power lines at the intersection of Culburra Road and Strathstone Street.



Low voltage and 11 kV high voltage overhead power in Canal Street East showing pole mounted substation no. 51602.