

**PEOPLE WHO BUILD**



# **UNEXPECTED FINDS PROTOCOL**

PROJECT NAME

**NEW MARSDEN PARK PUBLIC SCHOOL (NMPPS)**

PROJECT NO.

**CLIENT – SCHOOLS INFRASTRUCTURE NSW**

**CLIENT PROJECT REFERENCE – SINSW-19-2406**

**ADCO PROJECT NUMBER - #####**

# UNEXPECTED FINDS PROTOCOL



## VERSION CONTROL

| Rev. No. | Issue Date | Approved By       | Position             | Details      |
|----------|------------|-------------------|----------------------|--------------|
| R0       | 07/02/2020 | Matthew Wilkinson | Construction Manager | Initial Plan |
|          |            |                   |                      |              |
|          |            |                   |                      |              |
|          |            |                   |                      |              |
|          |            |                   |                      |              |
|          |            |                   |                      |              |
|          |            |                   |                      |              |
|          |            |                   |                      |              |
|          |            |                   |                      |              |
|          |            |                   |                      |              |

## ADCO PROJECT PERSONNEL CONSULTATION AND SIGN OFF

We, the undersigned, confirm that we have been consulted on the contents of this document, read and understood the contents of this document, and agree to implement the requirements of this Plan on this project site

| Name             | Position                | Signature | Date |
|------------------|-------------------------|-----------|------|
| Dean Israel      | Project Manager         |           |      |
| Zaiwar Aboushadi | Contracts Administrator |           |      |
| Paul Gower       | Site Manager            |           |      |
|                  |                         |           |      |
|                  |                         |           |      |
|                  |                         |           |      |
|                  |                         |           |      |
|                  |                         |           |      |
|                  |                         |           |      |
|                  |                         |           |      |

|                |                           |                       |                  |
|----------------|---------------------------|-----------------------|------------------|
| DOCUMENT TITLE | UNEXPECTED FINDS PROTOCOL | DOCUMENT CREATED      | 03 FEBRUARY 2020 |
| REVISION       | 0                         | DATE OF THIS REVISION | 07 FEBRUARY 2020 |
|                |                           | PAGE                  | 2 of 15          |

## CONTENTS

|  |    |
|--|----|
| VERSION CONTROL .....  | 2  |
| ADCO PROJECT PERSONNEL CONSULTATION AND SIGN OFF .....           | 2  |
| INTRODUCTION .....   | 4  |
| PRINCIPAL CONTRACTORS DETAILS.....                               | 5  |
| PROJECT INFORMATION .....  | 5  |
| OVERVIEW .....   | 6  |
| GENERAL PRINCIPALS FOR ASBESTOS CONTAINING MATERIALS (ACM) ..... | 6  |
| UNEXPECTED HERITAGE FINDS (UHF).....                             | 7  |
| TRAINING .....   | 8  |
| PROCEDURE IN THE EVENT OF AN UNEXPECTED FIND .....               | 8  |
| INCIDENT RESPONSE FLOW CHART .....                               | 10 |
| LEGAL AND OTHER REQUIREMENTS .....                               | 11 |
| PROJECT MANAGEMENT STRUCTURE .....                               | 12 |
| ORGANISATIONAL RESPONSIBILITIES .....                            | 13 |
| ENVIRONMENTAL RISK REGISTER.....                                 | 14 |

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 3 of 15          |

# UNEXPECTED FINDS PROTOCOL



## INTRODUCTION

### MANAGEMENT SYSTEM AND DOCUMENTATION

System documents which are referenced in this Plan or any associated Plan or Risk Register can be sourced by accessing the ADCO Constructions HUB. This is only accessible to ADCO personnel. Additional information can be obtained from the Project Manager.

### ADCO PERSONNEL SIGN OFF

ADCO project personnel will be inducted into the requirements of this Plan and any associated Plan or Risk Register by the relevant Project Manager. Evidence of induction and discussion will be recorded within section ADCO Project Personnel Consultation and Sign off.

### INFORMATION SUPPLY TO SUBCONTRACTORS

This Plan and any associated Plan or Risk Register (including any future revisions) will be supplied to subcontractors for review through the Aconex portal or another approved format.

### PLAN REVIEW

This document will be reviewed on a periodic basis to ensure its compliance to legislative and operational requirements. Reviews and updates will initiate a change to the plan revision number and be recorded in the "Version Control" section of the document.

Superseded "Soft Copy" Plans will be marked as such and will be located within the Management Plan Folder located on site. Electronic Plans will be located under the Project Drop Box File.

### SITE FILING

A hard copy of this Plan and any associated Plan or Risk Register including any future revisions will be held on site. On completion of the project, all relevant plans and documents will be archived.

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 4 of 15          |

# UNEXPECTED FINDS PROTOCOL



## PRINCIPAL CONTRACTORS DETAILS

| Name                              | State   | Address         | ABN            |
|-----------------------------------|---------|-----------------|----------------|
| <b>ADCO Constructions Pty Ltd</b> | Address | 7-9 West Street | 46 001 044 391 |
|                                   | Suburb  | North Sydney    |                |
|                                   | State   | NSW             |                |
|                                   | Phone   | 0284375000      |                |

## PROJECT INFORMATION

|  |  |
|--|--|
| <b>Project Description</b>               | The project can be described as the Design & Construction of a permanent consolidated two story courtyard building with capacity to accommodate 1,000 students. This new school building is to be comprised of the following: 40 teaching spaces, canteen, library, multipurpose hall, office and administration space, staff and student amenities, out of school hours care accommodation, multi-purpose sporting facilities and outdoor play spaces, associated site landscaping and public domain improvements, on-site parking spaces and a drop-off and pick-up area, construction of ancillary infrastructure and utilities as required, Ancillary and support spaces, Special education units, Bus Bay, Parent pick up / drop off area, Car parking areas, Covered Outdoor learning areas. |
| <b>Know Potential Finds (identified)</b> | Nil expected   |
| <b>Project Address</b>                   | The site is legally described as Lot 2889 in Deposited Plan 1230906. This is the corner of Northbourne Drive (to the east) and a proposed future road (to the north) within the Elara Estate, Marsden Park   |

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 5 of 15          |

## AERIAL VIEW



## OVERVIEW

ADCO Constructions implements an integrated Safety and Environmental Management System on all projects. The system is certified and meets ISO Standards. Our Management System documents the way construction-related activities are required to be completed in a safe and environmentally conscious manner. This Plan provides guidance and direction to site personnel if an unexpected find is encountered on site during the course of the project.

An unexpected find can be defined as:

- / Any unanticipated archaeological discovery e.g. aboriginal relicts' items of significance etc
- / Buried or surface asbestos containing materials (Bonded, Friable or other)
- / Buried waste materials e.g. medical waste, contaminated waste etc.
- / Septic or underground storage tanks
- / Animal burial pits
- / Discoloured and odorous soils and groundwater/seepage

## GENERAL PRINCIPALS FOR ASBESTOS CONTAINING MATERIALS (ACM)

ADCO's principles of asbestos management have been set in accordance with current and relevant Codes of Practice and Statuary obligations. These principles are summarised below:

- / Identifying if the find is Asbestos or ACM

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 6 of 15          |

- / Assuming Asbestos or ACM is present – What next!
- / Arrange for sampling and testing
- / Indicating the presence of Asbestos or ACM
- / Assessing the risk of exposure
- / Populating an Asbestos Register
- / Reviewing and revising the Asbestos Register
- / Accessing the Asbestos Register
- / Transferring the Asbestos Register
- / Populating an Asbestos Management Plan / Removal Plan
- / Reviewing and revising the Asbestos Management Plan / Removal Plan
- / Accessing the Asbestos Management Plan / Removal Plan
- / Managing other Asbestos related risks
- / Contaminated sites – Clearance Certificates
- / Demolition works
- / Asbestos related work
- / Disposing of Asbestos or ACM
- / Managing exposure to Asbestos or ACM
- / Health monitoring
- / Training workers about Asbestos and ACM
- / Equipment uses
- / Controlling risk – Hierarchy of control
- / Safe Work Practices
- / Personal Protective Equipment

## UNEXPECTED HERITAGE FINDS (UHF)

An Unexpected Heritage Find can be defined as any unanticipated discovery that has not been identified during a previous assessment or is not covered by an existing permit under relevant legislation. The find may have potential cultural heritage value which may require some type of statutory cultural heritage permit or notification if any interference of the heritage item is proposed or anticipated.

The range of potential archaeological discoveries can include but are not limited to:

- / Aboriginal or European stone artefacts, shell middens, burial sites, engraved rock art, scarred trees;
- / Remains of rail infrastructure including buildings, footings, stations, signal boxes, rail lines, bridges and culverts;
- / Remains of other infrastructure including sandstone or brick buildings, wells, cisterns, drainage services, conduits, old kerbing and pavement, former road surfaces, timber and stone culverts, bridge footings and retaining walls;
- / Artefact scatters including clustering of broken and complete bottles, glass, ceramics, animal bones and clay pipes;

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 7 of 15          |

- / Archaeological human skeletal remains.
- / Animal skeletal remains

## TRAINING

### Asbestos and Heritage Awareness Training

Asbestos awareness training provides participants with a general overview of asbestos including history and background; asbestos types and properties; common asbestos situations; health effects; risk in perspective and management of asbestos. Training is provided both internally and by external providers.

### Asbestos and Heritage Removal Training

This course is typically provided by an external registered training organisation (RTO) to personnel who intend to remove bonded ACM, pre-requisite for obtaining a SafeWork recognised licence.

Further information on training required for staff can be found in ADCO's [National Training Matrix](#).

## PROCEDURE IN THE EVENT OF AN UNEXPECTED FIND

Should an unexpected find of potential contamination be encountered during the works, the following procedure (Steps 1 to 13) should be followed with reference to the [Incident Response Flow Chart](#).

It must additionally be ensured that implemented procedures are in accordance with other adopted site documentation, such as the Environmental Management Plan, Health and Safety Management Plan and The ADCO Way.

1. Identified finding by worker
2. Cease work as soon as safe to do so and move clear of the finding.
3. Do not tamper or attempt to remove the finding.
4. Contact ADCO Management immediately.
5. Site Management to delineate an exclusion or quarantine zone around the area using fencing and or appropriate barriers and signage.
6. If not already done, Site Manager is to notify the Project Manager and or Construction Manager.
7. Cover area with tarps if practicable to preserve finding.
8. A suitable person (Site Manager) will initially assess the potential risk to health or the environment by the finding and asses if evacuation or emergency services need to be contacted.
9. Project Manager will arrange inspection by an external Environmental / Heritage Consultant to assess the finding and provide advice as follows:
  - / Preliminary assessment of the find and need for immediate management controls.
  - / What further assessment and/or remediation works are required and how such works are to be undertaken in accordance with contaminated site regulations and guidelines.
  - / Preparation of a remedial action plan for large scale contamination or specification for smaller or minor volumes of material
  - / Remediation works required

|                |                           |                       |                  |
|----------------|---------------------------|-----------------------|------------------|
| DOCUMENT TITLE | UNEXPECTED FINDS PROTOCOL | DOCUMENT CREATED      | 03 FEBRUARY 2020 |
| REVISION       | 0                         | DATE OF THIS REVISION | 07 FEBRUARY 2020 |
|                |                           | PAGE                  | 8 of 15          |

# UNEXPECTED FINDS PROTOCOL



/ Validation works required following remediation works


10. Works will not recommence in the affected area until appropriate advice has been obtained from the consultant or suitably qualified person with approval to recommence.
11. Any excavation works will not recommence until the extent of any contamination has been assessed and, if necessary, a remedial action plan (RAP) has been prepared.
12. Air monitoring requirements are to be advised by the consultant and implemented as required.
13. If safe to do so, the consultant will provide clearances for works to proceed in the affected area (subject to conditions). If it is not considered to be safe, works will remain on hold until appropriate approval is provided.
14. Excavated material from remedial activities will be separated from other materials and stockpiled for assessment. Sampling of the materials will be undertaken in accordance with the relevant guidelines or professional judgement where justification is applied. Samples will be analysed for a range of analytes as required for beneficial reuse or offsite disposal.
15. For materials requiring offsite disposal, laboratory results will be assessed to determine the appropriate waste classification of the material in accordance with the NSW EPA Waste Classification Guidelines. Depending on the classification, materials will be transported to an appropriate waste facility that is licensed to accept waste of the relevant classification or beneficially reused if appropriate.
16. A waste tracking system recording the volume of material, waste classification / beneficial reuse status, removal documentation and truck and receiving landfill facility details will be recorded to ensure all waste is accounted for and disposed or appropriately in accordance with NSW EPA requirements.
17. Any unexpected finds must be documented, and records of volumes and types of materials identified removed from the site must be kept on file.
  - a. Volume of material removed,
  - b. The type (classification) of material,
  - c. Licensed facility that the material was disposed to,
  - d. Receipt documentation from the licensed facility confirming volume received.
18. Keep a record of the unexpected find. The record must include exact location of the find. Documentation on the removal of any contaminated materials from the site must be kept on file

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 9 of 15          |

# UNEXPECTED FINDS PROTOCOL



## INCIDENT RESPONSE FLOW CHART

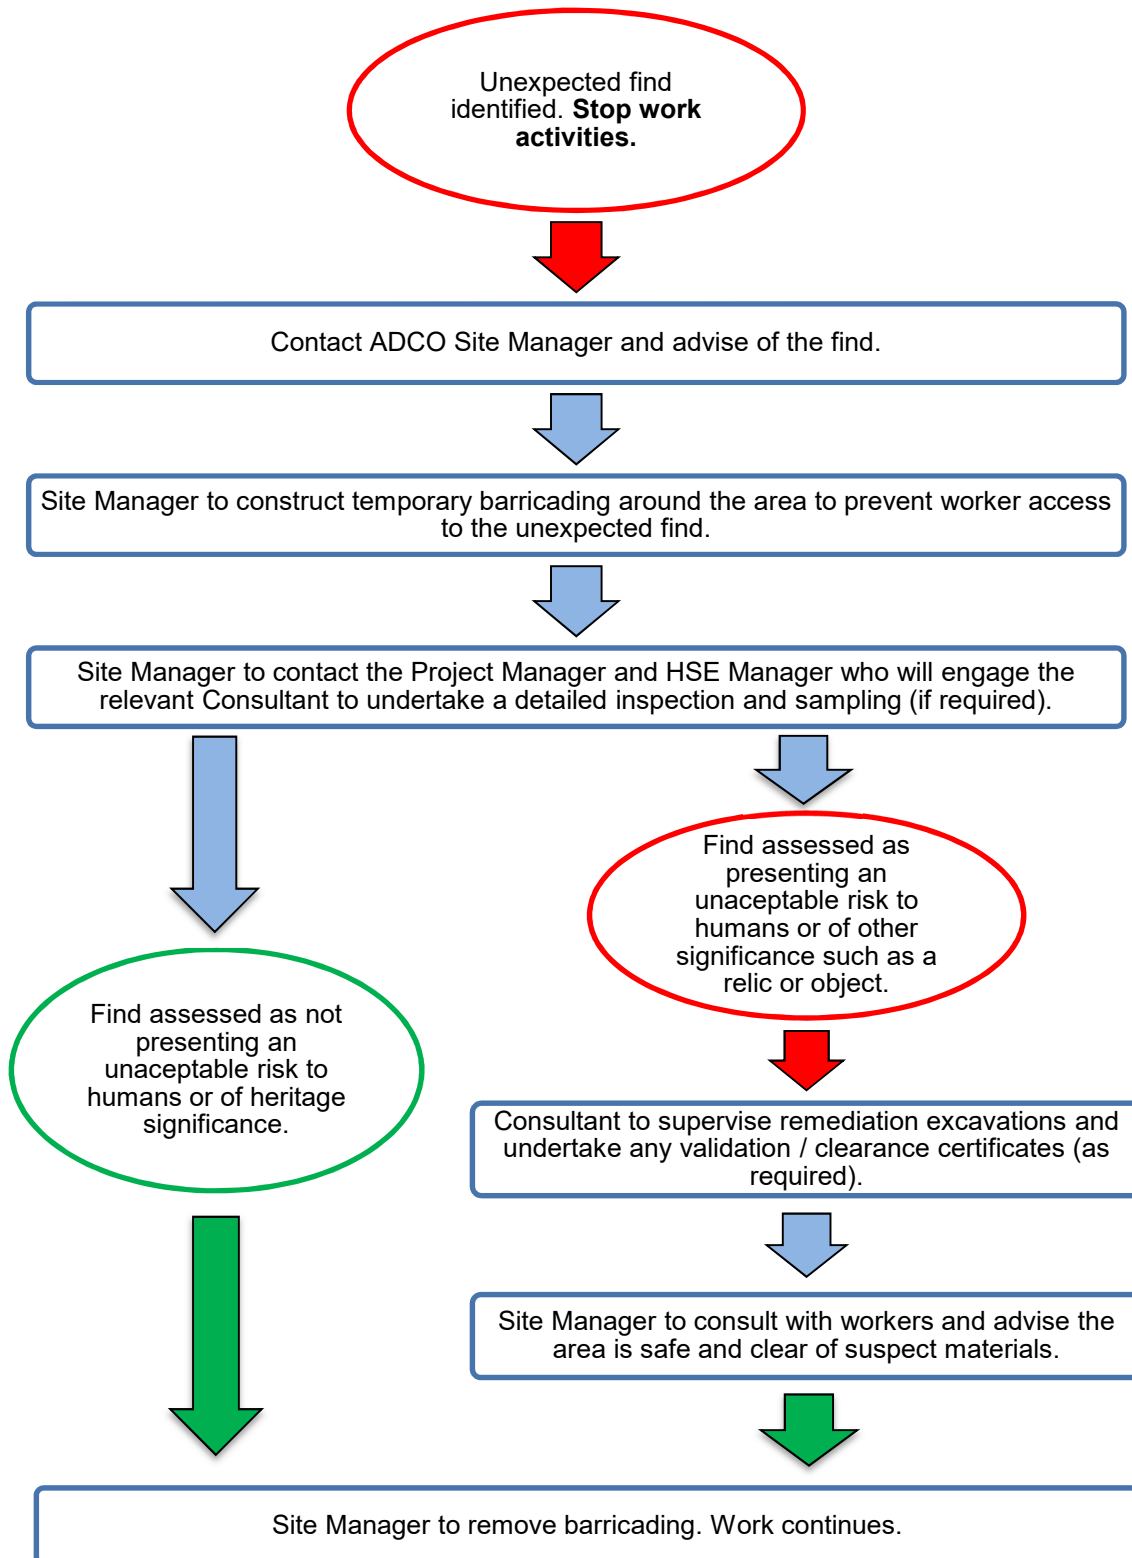

|                |                           |                       |                  |
|----------------|---------------------------|-----------------------|------------------|
| DOCUMENT TITLE | UNEXPECTED FINDS PROTOCOL | DOCUMENT CREATED      | 03 FEBRUARY 2020 |
| REVISION       | 0                         | DATE OF THIS REVISION | 07 FEBRUARY 2020 |
|                |                           | PAGE                  | 10 of 15         |

# UNEXPECTED FINDS PROTOCOL



## LEGAL AND OTHER REQUIREMENTS

### COMPLIANCE

Risks, hazards and controls on this project will be managed in accordance with WHS and Environmental legislation, Codes of Practice and Australian Standards. Legislation, Codes of Practice and Standards which will be applied to this project are noted in the Safety Management Plane and Environmental Management Plan.

### IDENTIFICATION

The identification and assessment of environmental risks (aspects and impacts) that could eventuate during construction of the project will be completed at the following stages:

- / Design
- / Tender
- / Project planning
- / Project construction

Aspects and impacts will be assessed relative to:

- / The potential to cause the discharge or release of pollutants to water, air, or land.
- / The impact on flora, fauna or heritage.
- / The potential to impact on the surrounding neighbourhood (e.g. noise, vibration)

The identification, assessment and risk mitigation of environmental risks are documented in the Environmental Risk Register within the Environmental Plan.

### MONITORING

Actions taken to mitigate environmental risks must be reviewed for ongoing compliance by the Project Manager, Site Manager and HSE Adviser. Verification of monitoring should be noted on the Weekly Site Inspection completed weekly by the project team.


Random inspections and audits will also monitor compliance to controls and implementation of management plans.

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 11 of 15         |

# UNEXPECTED FINDS PROTOCOL



## PROJECT MANAGEMENT STRUCTURE

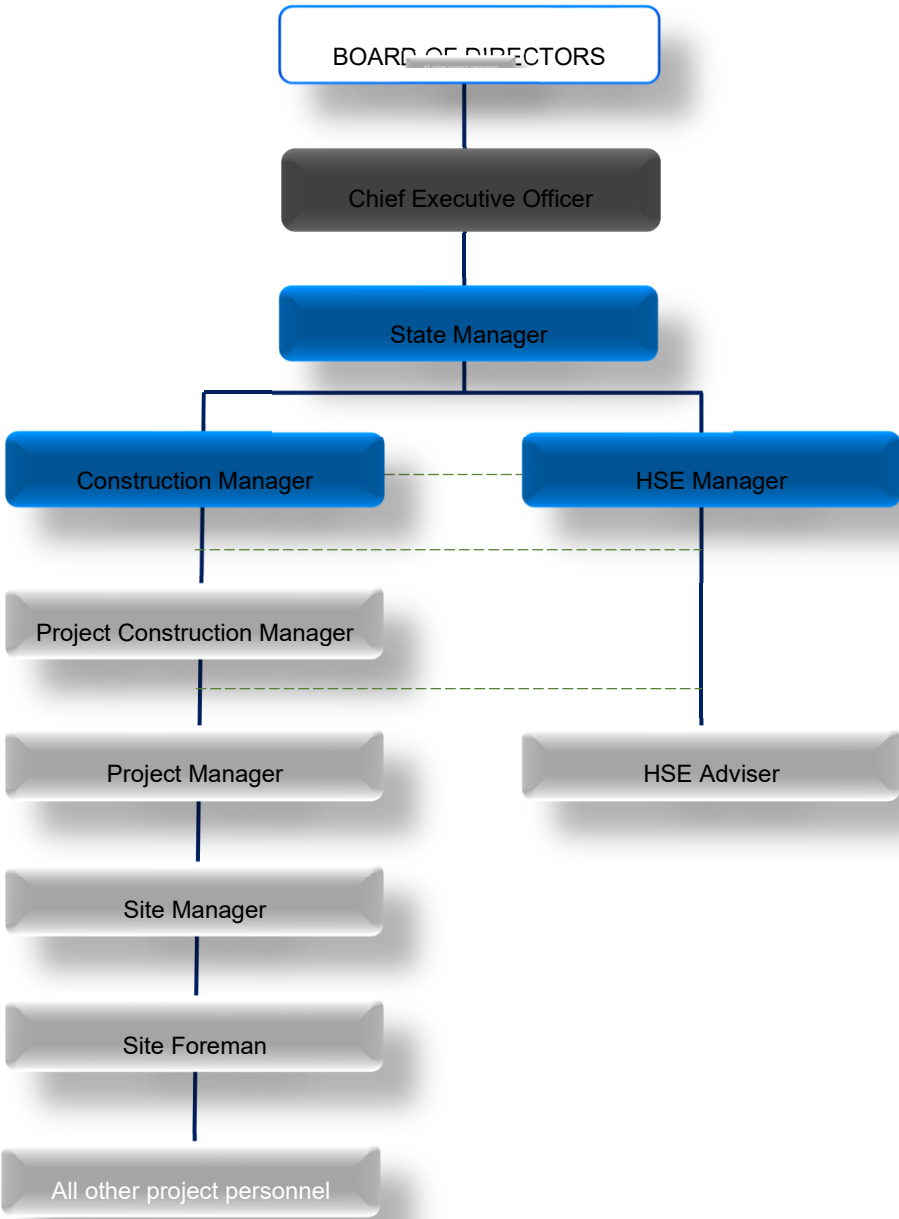

**Chief Executive Officer**

Neil Harding

**State Manager**

John Basilisco

**Construction Manager**

Matthew Wilkinson

**HSE Manager**

Phil Provenzano

**Project Manager**

Dean Israel

**HSE Adviser**

Michael Bromell

**Site Manager**

Paul Gower

**Site Foreman**

Dylan Gower

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 12 of 15         |

# UNEXPECTED FINDS PROTOCOL



## ORGANISATIONAL RESPONSIBILITIES

The Project Manager, Site Manager and HSE Adviser are responsible for ensuring that all site personnel comply with environmental risk mitigation requirements.

| Person / Party                                     | Responsibility  |
|--|---|
| Construction Manager (CM),<br>Project Manager (PM) | <ul style="list-style-type: none"> <li>/ Ensure all staff and contractors are aware of and comply with the plan.</li> <li>/ Project management</li> <li>/ Identification and bringing to the attention of appropriate staff, any suspect material</li> <li>/ Ensure all contractors working on asbestos are aware of and meet the requirement of the plan.</li> <li>/ Monitor and review compliance</li> </ul>  |
| Site Manager (SM),<br>Senior HSE Advisor (HSE)     | <ul style="list-style-type: none"> <li>/ Obtain from Subcontractor, copy of SafeWork Notification (Requirement of ADCO Asbestos removal permit)</li> <li>/ Ensure project personnel (including contractors) are inducted</li> <li>/ Surveying, identification and arranging for sampling of suspected asbestos containing materials by competent persons.</li> <li>/ Training and awareness</li> <li>/ Manage the asbestos works program and removal program</li> <li>/ Respond to incidents</li> <li>/ Document preparation, recording and filing</li> <li>/ Manage asbestos inspection contractor</li> <li>/ Monitor and review compliance</li> </ul> |
| Contractors (C) and<br>Trades Staff (TS)           | <ul style="list-style-type: none"> <li>/ Not to impact on an ACM without complying with the plan</li> <li>/ To bring to the attention of the SM/HSE any suspect material</li> <li>/ Refer to the plan for guidance to identify, manage, and remove asbestos</li> <li>/ Apply for Asbestos Permit to Work when performing asbestos removal work that requires notification.</li> <li>/ Undergo ADCO Contractor Induction</li> <li>/ Develop a site-specific asbestos removal control plan, SWMS AND Risk Assessment prior to performing the asbestos removal work</li> </ul>   |

|                |                           |                       |                  |
|----------------|---------------------------|-----------------------|------------------|
| DOCUMENT TITLE | UNEXPECTED FINDS PROTOCOL | DOCUMENT CREATED      | 03 FEBRUARY 2020 |
| REVISION       | 0                         | DATE OF THIS REVISION | 07 FEBRUARY 2020 |
|                |                           | PAGE                  | 13 of 15         |

# UNEXPECTED FINDS PROTOCOL



## ENVIRONMENTAL RISK REGISTER

Refer to Workplace Safety Australia to assist in the identification of Legislation and Codes of Practice that apply to ADCO operations and project / site activities undertaken. Applicable Legislation and Codes of Practice are to be identified in the reference section below.

Refer to Workplace Safety Australia for a detailed register of applicable Australian Standards. Access to Australian Standards is available through SAI Global

## REFERENCE LEGISLATION

### Acts and Regulations –

- / Environment Protection and Biodiversity Conservation Act 1999
- / Environmental Protection and Biodiversity Conservation Regulations 2000
- / Environmental Protection Act 1994
- / Environmental Protection Regulation 2008
- / Contaminated Land Act 1991
- / Protection of the Environmental Operations (POEO) Act 1997
- / Protection of the Environmental Operations (Clean Air) Regulation 2002
- / Protection of the Environmental Operations (Waste) Regulation 2005
- / Protection of the Environmental Operations (General) Regulation 2009
- / Contaminated Land Management Act 1997
- / Waste Avoidance and Resource Recovery Act 2001
- / Contaminated Land Management Regulation 2008
- / Environmental Protection Act 1997
- / Environmental Protection Regulation 2005
- / Environmental Protection Act 1970
- / Environmental Protection Act 1993
- / Environmental Protection Regulation 2009
- / Environmental Protection Act 1986
- / Environmental Protection Regulation 1987
- / Environmental Protection (Noise) Regulations 1997
- / Contaminated Sites Act 2003
- / Contaminated Sites Regulations 2006

### Policy -

- / Environmental Protection (Waste Management) Regulation 2000
- / Environmental Protection (Air) Policy 2008
- / Environmental Protection (Waste Management) Policy 2000
- / Plant Protection Regulation 2002
- / Environmental Protection (Noise) Policy 2008
- / Nature Conservation Act 1992
- / Environmental Protection (Water) Policy 2009
- / General Environmental Protection Policy 2007
- / Contaminated Sites 2009
- / Noise 2010

|                |                           |                       |                  |
|----------------|---------------------------|-----------------------|------------------|
| DOCUMENT TITLE | UNEXPECTED FINDS PROTOCOL | DOCUMENT CREATED      | 03 FEBRUARY 2020 |
| REVISION       | 0                         | DATE OF THIS REVISION | 07 FEBRUARY 2020 |
|                |                           | PAGE                  | 14 of 15         |

# UNEXPECTED FINDS PROTOCOL



- / Hazardous Material 2010
- / Air 1999
- / Water Quality 2008
- / State Environment Protection Policy (Ambient Air Quality) 1999
- / State Environment Protection Policy (Groundwater's of Victoria) 1997
- / Industrial Waste Management Policy (Waste Acid Sulphate Soils) 1999
- / State Environment Protection Policy (Air Quality Management) 2001.
- / State Environment Protection Policy (Control of Noise from Commerce, Industry and Trade) 1989
- / State Environment Protection Policy (Prevention and Management of Contamination of Land) 2002
- / State Environment Protection Policy (Waters of Victoria) 1988
- / Code of Practice for the Building and Construction Industry – Stormwater Pollution Prevention 1999

## Cultural Heritage -

- / The Native Title Act 1993 (Cth)
- / Aboriginal and Torres Strait Islander Heritage Protection Act 1984 (Cth)
- / Aboriginal Cultural Heritage Act 2003
- / Torres Strait Islander Cultural Heritage Act 2003
- / Queensland Heritage Act 1992
- / National Parks and Wildlife Amendment (Aboriginal Ownership) Act 1996
- / Heritage Act 1977
- / Aboriginal Land Rights Act 1983
- / Heritage Objects Act 1991
- / Heritage Act 2004
- / Aboriginal Heritage Act 2006
- / Aboriginal Heritage Regulations 2007
- / Aboriginal Heritage Act 1988
- / Heritage Act 1994
- / Heritage Places Act 1993
- / Aboriginal Heritage Act 1972

## HSE System References

### Procedure

- / Environmental Management

### General Requirements

- / Erosion and Sediment Management
- / Air Quality Management
- / Water Quality Management
- / Noise and Vibration Management
- / Contaminants
- / Heritage Management
- / Waste Management
- / Spills Management
- / Fauna and Flora Protection
- / Potable Water Management
- / Non-potable Water Management

|                       |                           |                              |                  |
|-----------------------|---------------------------|------------------------------|------------------|
| <b>DOCUMENT TITLE</b> | UNEXPECTED FINDS PROTOCOL | <b>DOCUMENT CREATED</b>      | 03 FEBRUARY 2020 |
| <b>REVISION</b>       | 0                         | <b>DATE OF THIS REVISION</b> | 07 FEBRUARY 2020 |
|                       |                           | <b>PAGE</b>                  | 15 of 15         |