

Construction Parking and Access Strategy

Western Harbour Tunnel and Warringah
Freeway Upgrade

Stage 1A Early and Enabling Works - Critical utility
installation, relocation and protection works

Transport for NSW

THIS PAGE LEFT BLANK INTENTIONALLY

Construction Parking and Access Strategy

Western Harbour Tunnel and Warringah Freeway Upgrade

Stage 1A Early and Enabling Works - Critical utility installation, relocation and protection works

September 2022

List of emergency and key contacts

Position	Name	Phone
North Sydney Council		(02) 9936 8100
24-hour community information line		1800 931 189
SPA Environmental Manager	Alyce Harrington	0409 633 908
SPA Community Manager	Amanda Muir	0499 542 816
SPA Project Manager	Jason Nisbet	0418 693 964
SPA Superintendent	John Cosgrave	0419 717 529
SPA Traffic Manager	David Lowe	0419169657
Environmental Representative	Maurice Pignatelli	0407 493 176
Transport for NSW Environmental Representative	Rob Owens	0435 578 294

Contents

1	Introduction	9
1.1	Background	9
1.2	Project description	11
1.3	Purpose and scope of this CPAS	16
2	Consultation, endorsement and approval	1
3	Existing conditions	1
3.1	Parking surveys	1
3.1.1	Parking survey times and locations	1
3.1.2	Parking survey methodology	6
3.1.3	Calculation of parking occupancy	6
3.2	Bells Avenue / Warringah Road, Cammeray	6
3.2.1	Parking supply	6
3.2.2	Parking occupancy	7
3.3	Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray	8
3.3.1	Parking supply	8
3.3.2	Parking occupancy	8
3.4	Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney	9
3.4.1	Parking supply	9
3.4.2	Parking occupancy	10
3.5	Alfred Street North, Neutral Bay	11
3.5.1	Parking supply	11
3.5.2	Parking occupancy	12
3.6	Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray	13
3.6.1	Parking supply	13
3.6.2	Parking occupancy	14
3.7	Ridge Street, North Sydney	15
3.7.1	Parking supply	15
3.7.2	Parking occupancy	16
3.8	Rosalind Street, Cammeray	17
3.8.1	Parking supply	17
3.8.2	Parking occupancy	17
3.9	Public transport accessibility	18
4	Proposed parking and access changes and impacts	21
4.1	Construction workforce parking	21
4.2	Locations outside the approved CSSI footprint	21

4.2.1	Bells Avenue / Warringa Road, Cammeray.....	21
4.2.2	Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray	21
4.2.3	Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney ..	23
4.3	Locations within the approved CSSI footprint.....	23
4.3.1	Alfred Street North, Neutral Bay	23
4.3.2	Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray.....	23
4.3.3	Ridge Street, North Sydney	25
4.3.4	Rosalind Street, Cammeray.....	25
5	Mitigation measures.....	26
5.1	Potential mitigation measures	26
5.2	Construction workforce parking.....	26
5.3	Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray	27
6	Monitoring and reporting.....	30
6.1	Monitoring of mitigation measures	30
6.2	Corrective actions	30
6.3	Reporting	30
6.4	Contingency measures	30
6.5	Update and amendment of this CPAS	31

Tables

Table 1-1	Critical utilities works.....	12
Table 1-2	Description of activities for the critical utility works scope	13
Table 1-3	CoA E139 and E140 compliance.....	16
Table 1-4	Rapid assessment of parking spaces to be removed	18
Table 3-1	Parking survey locations	1
Table 3-2	Existing parking occupancy – Bells Avenue / Warringa Road, Cammeray	7
Table 3-3	Existing parking occupancy – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray	9
Table 3-4	Existing parking occupancy – Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney.....	10
Table 3-5	Existing parking occupancy – Alfred Street North (northbound carriageway), Neutral Bay 13	
Table 3-6	Existing parking occupancy – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray	15
Table 3-7	Existing parking occupancy – Ridge Street, North Sydney	16
Table 3-8	Existing parking occupancy – Rosalind Street, Cammeray.....	18
Table 3-9	Bus services at each compound and work site.....	18

Table 5-1 Consideration of potential mitigation measures – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray	27
Table A-6-5 CoA and REMM relevant to the development of this CPAS.....	60

Figures

Figure 1-1 Key features of the Warringah Freeway Upgrade component of the project.....	10
Figure 1-2 Location of critical utility works scope.....	15
Figure 3-1 Parking survey locations – Bells Avenue / Warringa Road, Cammeray.....	2
Figure 3-2 Parking survey locations – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray	3
Figure 3-3 Parking survey locations – Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney.....	3
Figure 3-4 Parking survey locations – Alfred Street North (northbound carriageway), Neutral Bay .	4
Figure 3-5 Parking survey locations – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray	5
Figure 3-6 Parking survey locations – Ridge Street, North Sydney	5
Figure 3-7 Parking survey locations – Rosalind Street, Cammeray	6
Figure 3-8 Existing parking supply – Bells Avenue / Warringa Road, Cammeray	7
Figure 3-9 Existing parking supply – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray	8
Figure 3-10 Existing parking supply – Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney.....	10
Figure 3-11 Existing parking supply – Alfred Street North (northbound carriageway), Neutral Bay	12
Figure 3-12 Existing parking supply – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray	14
Figure 3-13 Existing parking supply – Ridge Street, North Sydney	16
Figure 3-14 Existing parking supply – Rosalind Street, Cammeray	17
Figure 3-15 Bus network in Neutral Bay, North Sydney and Cammeray	20
Figure 4-1 Long-term temporary removal of on-street parking – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray (indicative only – exact location subject to change).....	22
Figure 4-4 Long-term temporary removal of on-street parking – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray (indicative only – exact location subject to change).....	24
Figure 4-5 Long-term temporary removal of on-street parking – Ridge Street, North Sydney (indicative only – exact location subject to change)	25

Appendices

Appendix A1	Parking survey data
Appendix A2	Additional CoA and REMM compliance table
Appendix A3	Community Notification

Document control

Approval

Title	Critical utility installation, relocation and protection works Construction Parking and Access Strategy
Approved by SPA Environment Manager	Alyce Harrington
Signed	
Dated	14/09/22
Approved by SPA Project Manager	Jason Nisbet
Signed	
Dated	14/09/22

Version control

The below document status table is for tracking the revisions of the CPAS, while the project is in construction. The version control table is to be used to track CPAS revisions, including those incorporating changes following agency comments.

It may be modified where necessary to fit with requirements of the individual project.

Revision	Date	Description	Approval
A	7/12/20	For internal review	PT
B	28/01/21	For internal review	PT
C	19/02/21	For NSC and community consultation	PT
0	05/05/21	For lodgement to DPE	DL
1	10/06/21	Updated following additional TfNSW comments	DL
2	25/06/21	Updated following DPE comments	DL
3	31/08/21	Updated following additional DPIE comments	DL
4	27/09/21	Updated following DPE comments	DL
5	21/2/22	General Update for extended car park requirements	AH
6	23/3/22	Updated following additional TfNSW comments	AH
7	5/5/22	Updated following DPE comments	AH
8	31/08/22	General update following extension of program	AH
9	14/09/22	Update following DPE review of Rev 8	AH

Glossary / abbreviations

Abbreviation	Expanded text
CCS	Community Communication Strategy
CEMP	Construction Environmental Management Plan
CGC	Cammeray Golf Course
CoA	Condition of Approval
CPAS	Construction Parking and Access Strategy
CUT	Critical utilities installation, relocation and protection
DPE	Department of Planning and Environment
EIS	Environmental Impact Statement
ITS	Intelligent Transport System
Project, the	Western Harbour Tunnel Warringah Freeway Upgrade
REMM	Revised Environmental Management Measures
ROL	Road Occupancy Licence
TfNSW	Transport for NSW
TTAMP	Traffic, Transport and Access Management Sub-plan
WFU	Warringah Freeway Upgrade
WFUEW	Warringah Freeway Upgrade Early Works
WFUMW	Warringah Freeway Upgrade Main Works
WHT	Western Harbour Tunnel
WHTWFU	Western Harbour Tunnel Warringah Freeway Upgrade

1 Introduction

1.1 Background

The Western Harbour Tunnel and Warringah Freeway Upgrade (WHTWUFU) is shown in Figure 1-1. The project comprises two main components:

- A new crossing of Sydney Harbour involving twin tolled motorway tunnels connecting the M4-M5 Link at Rozelle and the Warringah Freeway at North Sydney (the Western Harbour Tunnel)
- Upgrade and integration work along the existing Warringah Freeway, including infrastructure required for connections to the Beaches Link and Gore Hill Freeway Connection project. Reconfiguration works as part of the Warringah Freeway Upgrade would optimise the road corridor and improve the performance of the Sydney Harbour Tunnel, the Sydney Harbour Bridge and the Western Harbour Tunnel.

Due to its importance, the WHTWUFU project was declared to be Critical State Significant Infrastructure (CSSI) by the Minister for Planning and Public Space on 9 November 2020.


On 21 January 2021, the Department of Planning, Industry and Environment (DPIE) approved the construction and operation of the WHTWUFU project (SSI 8863).

A detailed description of the project is provided in Chapter 5 of the Western Harbour Tunnel and Warringah Freeway Upgrade Environmental Impact Statement (EIS).

The WHTWUFU project will be delivered in numerous stages:

- **Stage 1 - Early and enabling works:**
 - Stage 1A - Critical utility installation, relocation and protection (CUT)
 - Stage 1B - Cammeray Golf Course adjustment works (CGC)
 - Stage 1C – Massey to Amherst Street noise barrier wall (M2A) (the subject of this Construction Environmental Management Plan (CEMP))
 - Stage 1D – WHT construction power and utilities (WHTCP)
 - Stage 1E – Maritime Heritage - relocation of historic vessels *M.V. Cape Don and Baragoola* (MH)
- **Stage 2 - Warringah Freeway Upgrade project:**
 - Stage 2A - Warringah Freeway Upgrade early works (WFUEW)
 - Stage 2B - Warringah Freeway Upgrade main works (WFUMW)
- **Stage 3 - Western Harbour Tunnel project (WHT):**
 - Supplementary stages to be confirmed at a later stage (upon procurement of the WHT Contractor/s)

This Construction Parking and Access Strategy (CPAS) applies only to Stage 1A Early and Enabling Works - Critical utility installation, relocation and protection stage of the project (referred to herein as “the critical utility works” or ‘CUT’. The critical utility works will support the delivery of the wider WHTWUFU program of works by undertaking these works prior to the commencement of the Stage 2 and Stage 3.

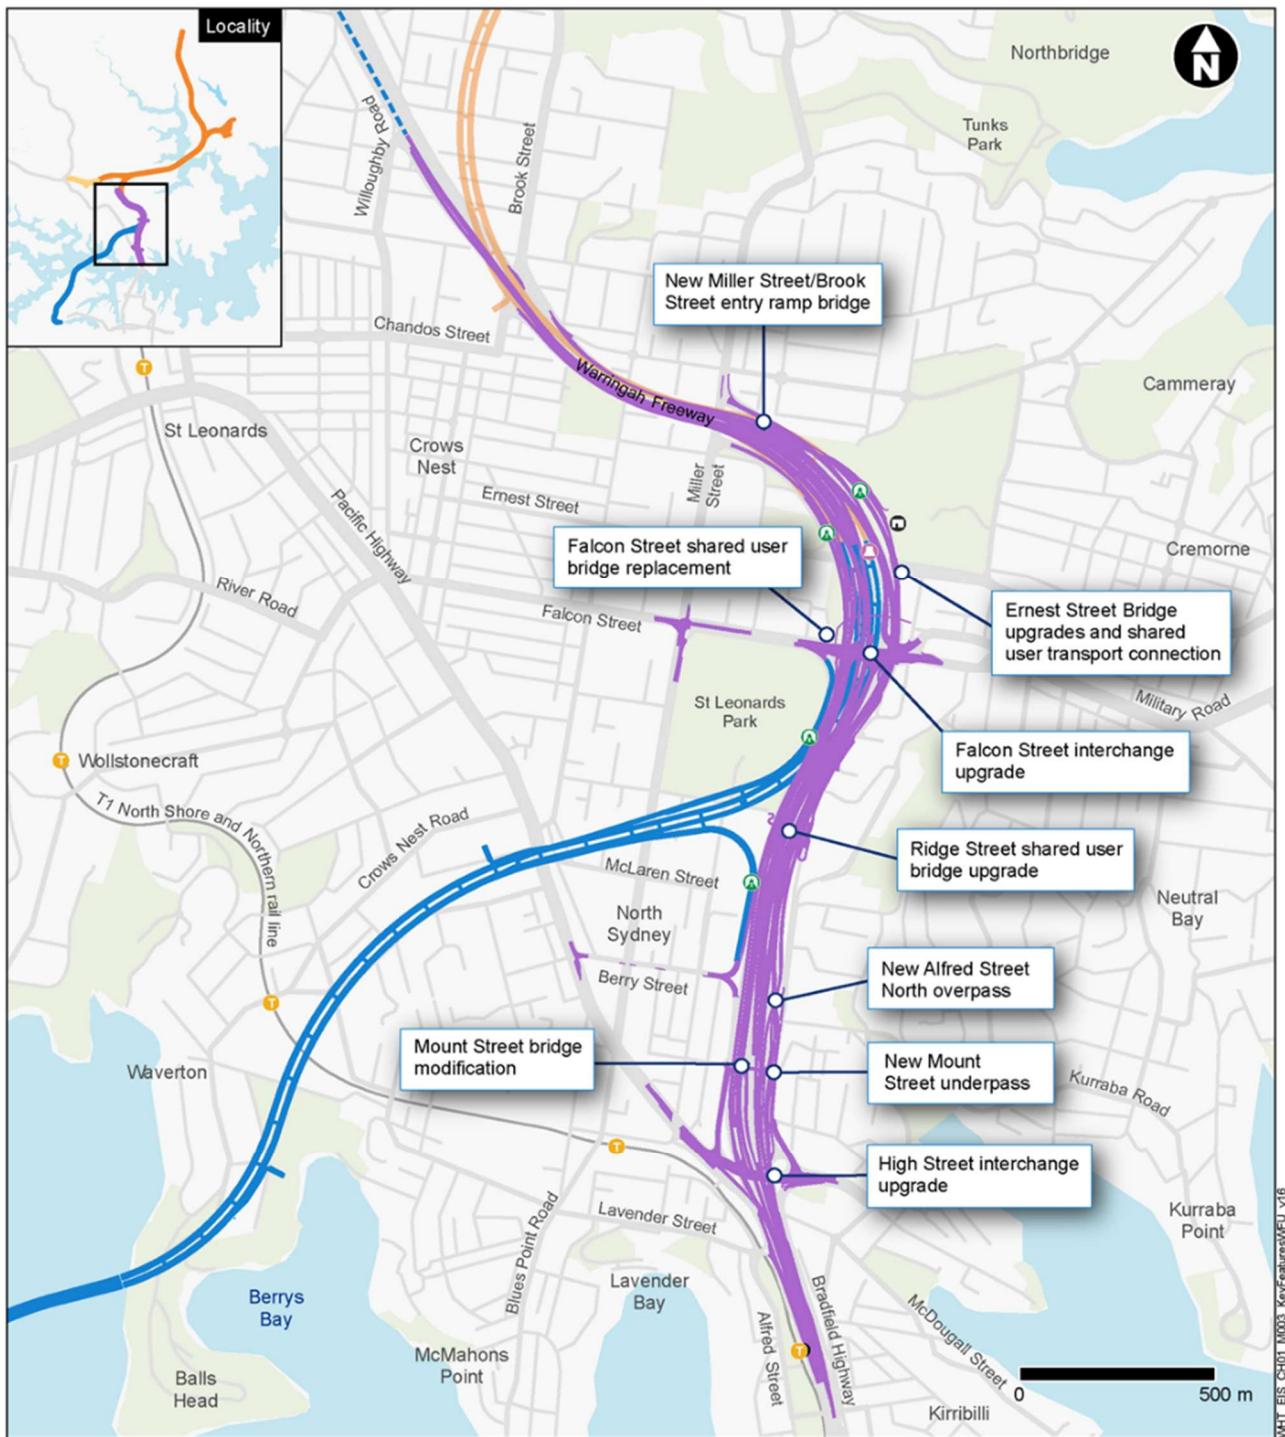

Legend

Operational features

- Warringah Freeway Upgrade
- Western Harbour Tunnel
- Communications cable for motorway control centre
- Surface connection
- Permanent operational facility
- Ventilation outlet

Connecting projects

- Beaches Link

Existing rail network

- Heavy rail
- Train station

(Reference: Western Harbour Tunnel and Warringah Freeway Upgrade Environmental Impact Statement, Figure 1-3)

Figure 1-1 Key features of the Warringah Freeway Upgrade component of the project

1.2 Project description

The early and enabling works will support the delivery program of the Main Works of the project by undertaking these works prior to the commencement of the Main Works.

This CPAS applies only to the critical utility installation, relocation and protection early works package of the project (Stage 1A). These critical utilities work is critical to an earlier start on site and will be undertaken as part of early and enabling works of the project as outlined in Table 1-1 and Figure 1-2.

Table 1-2 A summary of the activities which will be completed as part of the critical utility works scope are outlined in Table 1-1.

The critical utility works will commence in early 2021 and be completed by mid to late 2022. The program for the remaining stages of the WHTWUFU project is included in the WHTWUFU Project Staging Report.

Table 1-1 Critical utilities works

Areas	Key activities
Alfred Street North, Neutral Bay	Deviation of existing Sydney Water sewer mains Relocation of existing Ausgrid assets Relocation of various communication provider assets
Arthur Street / High Street, North Sydney	Relocation of existing Ausgrid assets Relocation of various communication provider assets Relocation of two (2) existing Sydney Harbour Tunnel fire hydrant booster stations Relocation of existing 415V feed to Sydney Harbour Tunnel control room
Cammeray Avenue / Ernest Street / Cammeray Golf Course, Cammeray	Relocation of existing in-ground Ausgrid assets Removal of existing disused in-ground Ausgrid assets Relocation of existing in-ground Sydney Water assets Relocation of existing in-ground communication provider assets Installation of new permanent Intelligent Transport System (ITS) node and temporary connections Installation of temporary construction power supply along Ernest Street from Ben Boyd Road to the Cammeray Golf Course site (WHT10).

Table 1-2 Description of activities for the critical utility works scope

Activity	Description
Establishment of major ancillary facilities	
Site preparation works	<p>Provision of site security such as temporary fencing and perimeter fencing</p> <p>Clearing and trimming of vegetation within the construction footprint</p> <p>Site levelling, grading and compaction (including fill importation), including temporary stockpiling of materials for site levelling</p> <p>Provision of foundations and buildings for toilet facilities, offices, lunchrooms, signage and pedestrian diversions, and installation of traffic barriers</p>
Site survey and site investigation works	<p>Ground penetrating radar or electromagnetic ground investigation</p> <p>Utility investigation by potholing with a vacuum truck</p>
Initial environmental controls	<p>Erosion and sediment controls, including:</p> <p>Installation of rip rap</p> <p>Drainage sump</p> <p>Diversion of offsite flows</p> <p>Erosion, sediment and water flow controls</p> <p>Delineation of sensitive areas and temporary fencing/hoardings</p>
Fit out, commissioning and install of remaining site infrastructure including	<p>Chemical and hazardous material storage</p> <p>Designated stockpile/laydown areas</p> <p>Office furniture fit out</p> <p>Formalisation of on-site car parking (line marking etc.)</p> <p>Site lighting installed which will involve the use of power saws for cutting steel work</p>
Critical utilities work	
Installation of services to the site e.g., water, sewer, power, communications	<p>Establish temporary work area including installation of temporary fencing, storage, laydown and stockpiling areas</p> <p>Installing pre-construction environmental management controls, e.g., sandbags at stormwater drainage outlets</p> <p>Clearing and trimming of vegetation</p> <p>Concrete wet saw cutting to remove concrete or asphalt pavement</p> <p>Trench excavations</p> <p>Stockpiling excavated materials within the work area for reuse or removal for off- site disposal</p> <p>Preparing sub-grade surface (e.g., stabilised sand) to accommodate utility services</p> <p>Laying utility services either as pipes, cables or conduits</p> <p>Constructing joint bays and pits (where required)</p> <p>Pulling feeders and cables through conduits</p>

Activity	Description
	<p>Connecting utility services to existing networks</p> <p>Testing and commissioning of utility services</p> <p>Backfilling trenches and re-instating ground surface to an appropriate condition</p> <p>Rehabilitate areas disturbed by works</p> <p>Site clean-up and decommissioning of temporary work areas and environmental management controls</p>
<p>Installation of relocated utilities e.g., water, sewer, power, communications</p>	<p>Establish temporary work area including installation of temporary fencing, storage, laydown and stockpiling areas</p> <p>Installing pre-construction environmental management controls, e.g., sandbags at stormwater drainage outlets</p> <p>Clearing and trimming of vegetation</p> <p>Concrete wet saw cutting to remove concrete or asphalt pavement</p> <p>Trench excavations</p> <p>Installation of directional drilling launch/receiving sites</p> <p>Stockpiling excavated materials within the work area for reuse or removal for off- site disposal</p> <p>Preparing sub-grade surface (e.g., stabilised sand) to accommodate utility services</p> <p>Laying utility services either as pipes, cables or conduits</p> <p>Constructing joint bays and pits (where required)</p> <p>Pulling feeders and cables through conduits</p> <p>Connecting utility services to existing networks</p> <p>Testing and commissioning of utility services</p> <p>Backfilling trenches and re-instating ground surface to an appropriate condition</p> <p>Removal of redundant utilities</p> <p>Rehabilitate areas disturbed by works</p> <p>Site clean-up and decommissioning of temporary work areas and environmental management controls</p>

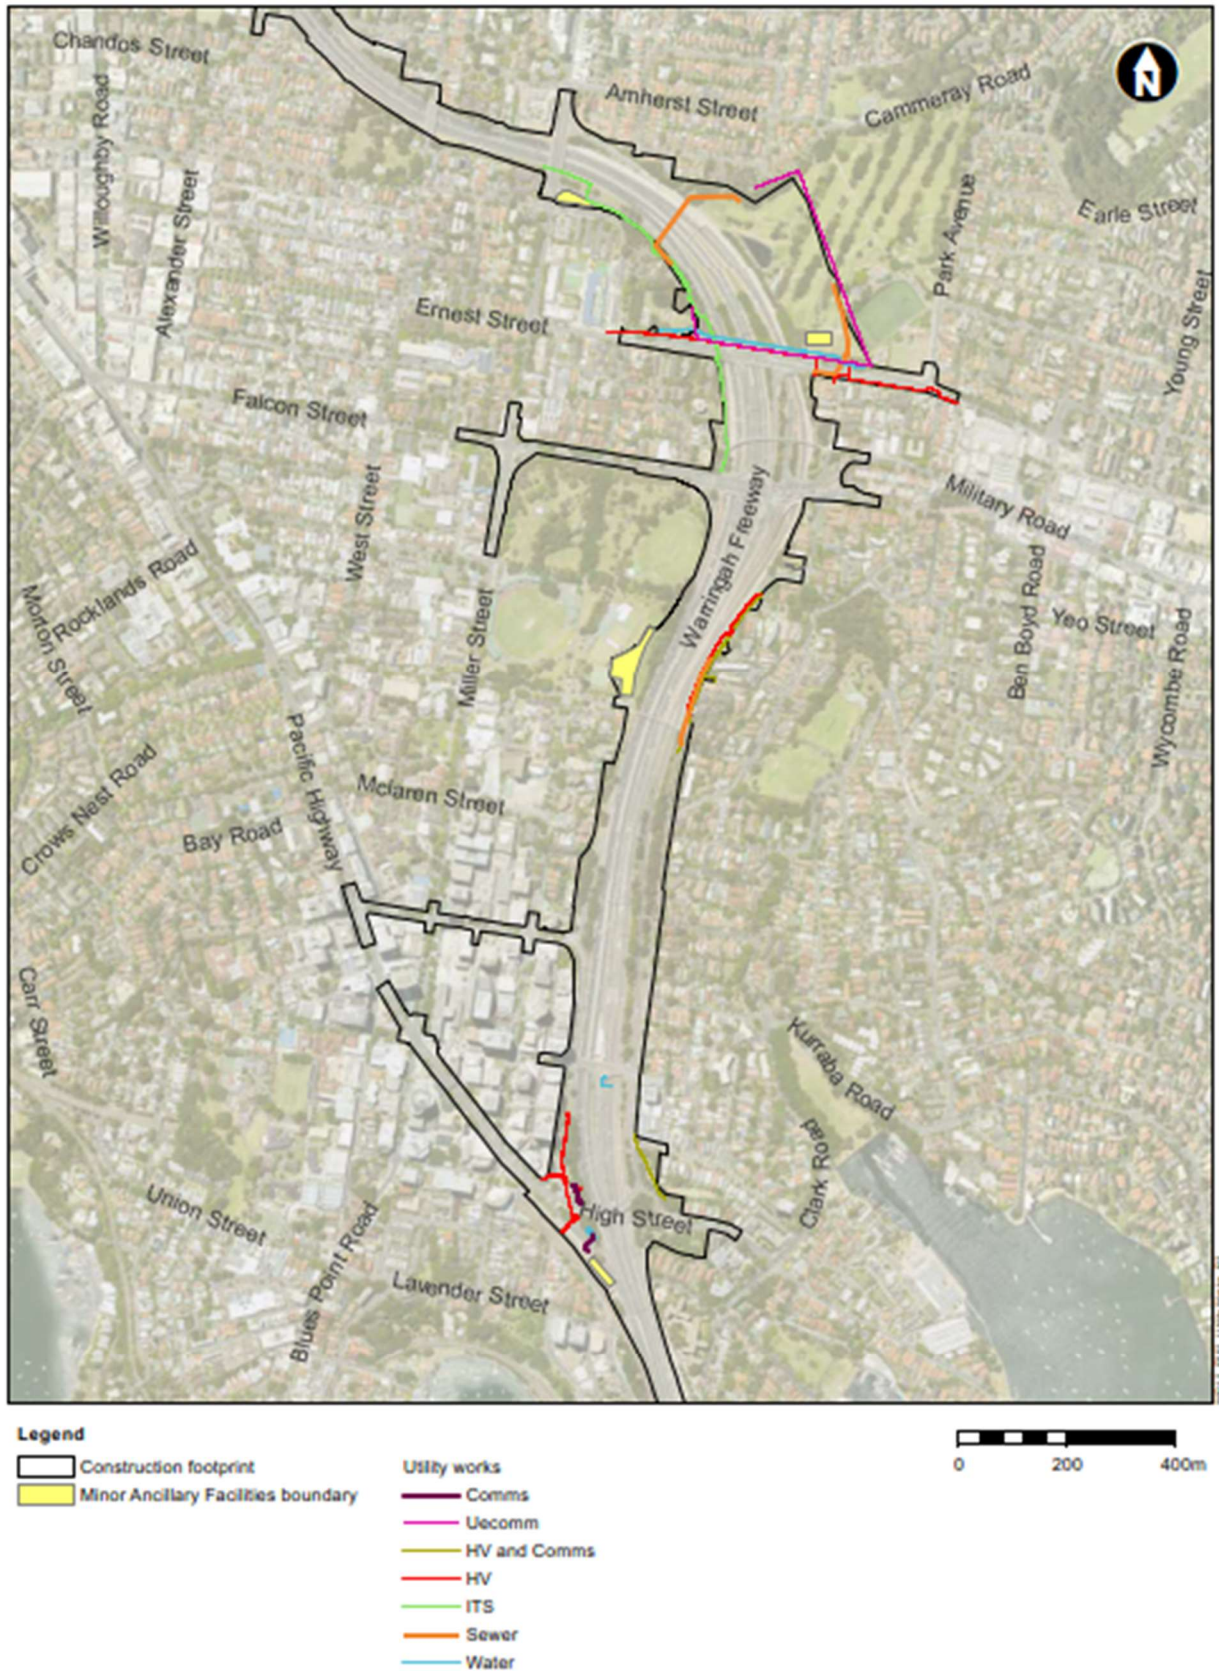


Figure 1-2 Location of critical utility works scope

1.3 Purpose and scope of this CPAS

This CPAS has been prepared to describe how the Contractor, during the critical utilities work, will comply with the requirements of the NSW Minister for Planning and Public Space's Conditions of Approval (CoA) E139 and E140. The scope of the CPAS includes on- and off-street parking changes during the critical utilities work that are located outside the approved CSSI footprint. Car parking requiring removal inside the approved CSSI footprint has been considered in the EIS and has already been approved under the Infrastructure Approval (SSI-8863). Notwithstanding, car parking spaces that will be removed during the critical utilities work that are located within the approved CSSI footprint have been assessed and identified.

The CPAS will be lodged to DPIE at least one month prior to the commencement of any work that will impact on parking. These works will not commence until the CPAS has been approved by DPIE.

The requirements of CoA E139 and E140 and where they are met in this CPAS are shown in Table 1-3. Additional CoA and Revised Environmental Management Measures (REMM) are presented in Appendix A3.

Table 1-3 CoA E139 and E140 compliance

CoA No.	Condition requirements	Where addressed in CPAS
E139	Vehicles (including light and heavy vehicles) associated with the CSSI must be managed to:	
	a. minimise parking on local roads	Section 5.2 Also refer to Traffic, Transport and Access Management Sub-Plan (TTAMP)
	b. minimise idling and queuing on state and regional roads	Section 5.2 Also refer to the TTAMP
	c. not carry out marshalling of construction vehicles near sensitive land user(s)	Section 5.2 Also refer to the TTAMP
	d. not block or disrupt access across pedestrian or shared user paths at any time	Section 5.2 Also refer to the TTAMP
	e. ensure spoil haulage vehicles adhere to the nominated haulage routes identified in the Traffic, Transport and Access Management CEMP Sub-plan	N/A – no spoil haulage will be required during the CUT works.
E140	A Construction Parking and Access Strategy must be prepared to identify and mitigate impacts resulting from on- and off-street parking changes during construction of the CSSI. The Strategy must include, but not necessarily be limited to:	

CoA No.	Condition requirements	Where addressed in CPAS
	a. achieving the requirements of Condition E139	Table 1-3
	b. confirmation and timing of the removal of on- and off-street parking associated with construction of the CSSI	Section 4
	c. parking surveys of all parking spaces to be removed or occupied by the CSSI workforce to determine current demand during peak, off-peak, school drop-off and pick up, weekend periods and during special events	Section 3.1
	d. consultation with affected stakeholders utilising existing on- and off-street parking stock which will be impacted as a result of construction	Section 1
	e. assessment of the impacts of changes to on- and off-street parking stock taking into consideration, occupation by the CSSI workforce, outcomes of consultation with affected stakeholders and considering the impacts of special events	Section 4
	f. identification of mitigation measures to manage impacts to stakeholders as a result of on- and off-street parking changes including, but not necessarily limited to, staged removal and replacement of parking, provision of alternative parking arrangements, managed staff parking arrangements and working with relevant council(s) to introduce parking restrictions adjacent to work sites and compounds or appropriate residential parking schemes	Section 5
	g. where residential parking schemes already exist, off-road parking facilities must be provided for the CSSI workforce	Section 4.1
	h. mechanisms for monitoring, over appropriate intervals, to determine the effectiveness of implemented mitigation measures	Section 6.1
	i. details of shuttle bus service(s) to transport the CSSI workforce to construction sites from public transport hubs and off-site car parking facilities (where these are provided) and between construction sites	Section 5
	j. provision of contingency measures should the results of mitigation or monitoring indicate implemented measures are ineffective	Section 6.4

CoA No.	Condition requirements	Where addressed in CPAS
	k. provision of reporting of monitoring results to the Planning Secretary and relevant council(s) at three monthly intervals	Section 6.3
	The Construction Parking and Access Strategy must be submitted to the Planning Secretary for approval at least one month before the commencement of any works that impact existing parking. The approved Strategy must be implemented before impacting on on-street parking.	Section 1.3

A rapid assessment of parking spaces that will be removed during the critical utilities work is shown in Table 1-4.

Table 1-4 Rapid assessment of parking spaces to be removed

Assessment criteria	Alfred Street North	Cammeray Avenue (south of ANZAC Avenue Reserve)	Ridge Street	Rosalind Street	Bells Avenue / Warringa Road	Cammeray Avenue (adjacent to ANZAC Avenue Reserve)	Arthur Street (between Pacific Highway and Middlemiss Street)
Has the Roads Act 1993 been enacted or does TfNSW already own / control the land?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Is the parking located within the approved CSSI footprint?	Yes	Yes	Yes	Yes	No	No	No
Has sufficient off-street car parking been provided for the construction workforce?	Yes	Yes	Yes	Yes	Yes	Yes	Yes
How many parking spaces are proposed to be removed?	0 spaces	26 spaces	6 spaces	0 spaces	0 spaces	8 spaces	0 spaces
Are there sufficient remaining car parking spaces to meet parking demand post-removal?	Yes	No	Yes	Yes	Yes	No	Yes
Where addressed in CPAS	Sections 3.5 and 4.3.1	Sections 3.6 and 4.3.2	Sections 3.7 and 4.3.3	Sections 3.8 and 4.3.4	Sections 3.2 and Error! Reference	Sections 3.3, 4.2.1 and 5.3	Sections 3.4, 4.2.3 and Error! Reference

Assessment criteria	Alfred Street North	Cammeray Avenue (south of ANZAC Avenue Reserve)	Ridge Street	Rosalind Street	Bells Avenue / Warringa Road	Cammeray Avenue (adjacent to ANZAC Avenue Reserve)	Arthur Street (between Pacific Highway and Middlemiss Street)
					source not found.		source not found.

2 Consultation, endorsement and approval

This CPAS has been accepted by the Contractor Project Manager, Contractor Environmental Manager and Transport for NSW (TfNSW) prior to lodgement to DPIE for approval.

The CPAS was prepared with consideration of consultation undertaken with North Sydney Council and stakeholders who were affected by impacts to on and off-street parking.

Consultation was undertaken with affected stakeholders associated with on-street car parking removal proposed on Bells Avenue and Cammeray Avenue, in accordance with CoA E140(d),(e) and (f). The intent of this consultation was to inform affected stakeholders, to assess impacts to affected stakeholders and to develop specific mitigation measures to manage the impacts to affected stakeholder. This consultation included the following:

- Letter box drops
- Door knocks
- Emails
- Phone calls
- Online Survey.

No specific mitigation measures were identified following the outcomes of stakeholder consultation associated with the removal of on-street car parking along Bells Avenue, Cammeray Avenue and Arthur Street. Therefore, no additional mitigation measures were developed beyond those presented in Section **Error! Reference source not found.** of this CPAS.

In accordance with CoA A5 a Consultation Summary report was been prepared to document the consultation undertaken in the development as required by CoA E140(d),(e) and (f). This Consultation Summary was lodged to DPIE along with this CPAS.

The CPAS was subsequently approved by DPIE on 3 October 2021 however the approval placed an expiry restriction on the usage of the carparking spaces. This CPAS has subsequently been updated to accommodate ongoing carparking needs of the project as described in Section 4.

To ensure impacted stakeholders are aware of and are provided with the opportunity to comment on the proposed extensions to the occupation of carparking spaces, a letter box drop was issued on the 20th of June 2022 to the affected stakeholders. A copy of the notification slips are provided in Appendix C. To date, no comments or complaints have been received by the community in relation to the extension of car park occupation.

3 Existing conditions

3.1 Parking surveys

3.1.1 Parking survey times and locations

In accordance with CoA E140(c), parking surveys have been undertaken at all locations where on-street parking spaces are proposed to be removed to determine existing parking demand during peak, off-peak, school drop-off and pick up, weekend periods and during special events.

The parking surveys were undertaken on the following days and times:

- Weekdays¹
 - 8.30 am (weekday morning peak / school drop-off)
 - 3 pm (school pick up)
 - 5 pm (weekday evening peak)
 - 10 pm (weekday evening off-peak)
- Weekends²
 - 12 pm (weekend day)
 - 11 pm (weekend evening)

These days do not coincide with public holidays or school holidays. The parking survey results can therefore be considered an accurate representation of a typical weekday and weekend.

The parking surveys were undertaken at the locations listed in Table 3-1.

Table 3-1 Parking survey locations

Location	Road segment
Bells Avenue / Warringah Road, Cammeray (refer to Figure 3-1)	Northern and southern sides, south of Amherst Street / Cammeray Road
Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray (refer to Figure 3-2)	Northern and southern sides, adjacent to ANZAC Avenue Reserve

¹ Weekday surveys for all locations except Arthur Street (between Pacific Highway and Middlemiss Street) were undertaken on Thursday 26 November 2020, Monday 14 December 2020, Tuesday 15 December 2020, Wednesday 16 December 2020 and Friday 18 December 2020. Weekday surveys for Arthur Street (between Pacific Highway and Middlemiss Street) were undertaken on Monday 24 May 2021, Tuesday 25 May 2021, Wednesday 26 May 2021, Thursday 27 May 2021 and Friday 28 May 2021.

² Weekend surveys for all locations except Arthur Street (between Pacific Highway and Middlemiss Street) were undertaken on Saturday 28 November 2020 and Sunday 13 December 2020. Weekend surveys for Arthur Street (between Pacific Highway and Middlemiss Street) were undertaken on Saturday 29 May 2021 and Sunday 30 May 2021.

Location	Road segment
Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney (refer to Figure 3-3)	Eastern and western sides, between Pacific Highway and Middlemiss Street
Alfred Street North, Neutral Bay (refer to Figure 3-4)	Northbound carriageway, western side, between Kurraba Road and McIntosh Lane Northbound carriageway, eastern side, between Bent Street and Rose Avenue
Cammeray Avenue (south of ANZAC Avenue Reserve) (refer to Figure 3-5)	Western side, south of ANZAC Avenue Reserve
Ridge Street, North Sydney (refer to Figure 3-6)	Northern and southern sides, east of Miller Street
Rosalind Street, Cammeray (refer to Figure 3-7)	Northern and southern sides, between Miller Street and ANZAC Avenue



Figure 3-1 Parking survey locations – Bells Avenue / Warringa Road, Cammeray



Figure 3-2 Parking survey locations – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray

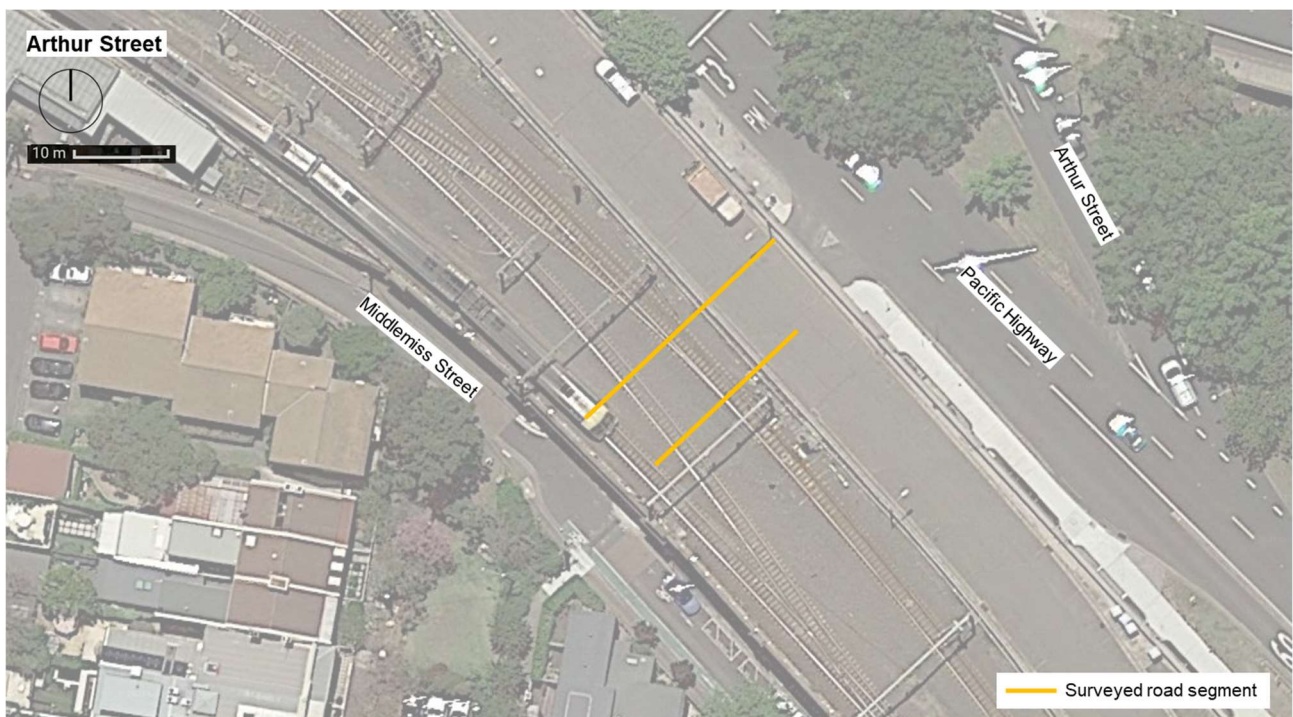


Figure 3-3 Parking survey locations – Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney



Figure 3-4 Parking survey locations – Alfred Street North (northbound carriageway), Neutral Bay



Figure 3-5 Parking survey locations – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray

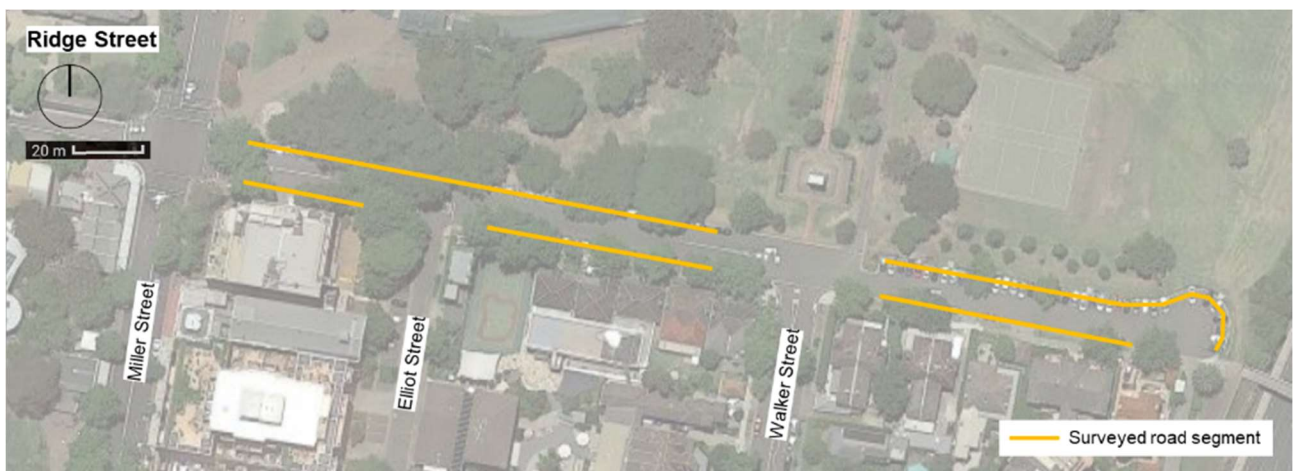


Figure 3-6 Parking survey locations – Ridge Street, North Sydney



Figure 3-7 Parking survey locations – Rosalind Street, Cammeray

3.1.2 Parking survey methodology

All nominated locations subject to the parking survey were initially inspected to note existing capacity and existing parking restrictions (e.g., untimed, timed parking, loading zones). Where on-street parking spaces are not marked, the maximum number of parking spaces was determined in accordance with Australian Standard 2890.5-1993 Parking facilities Part 5: On-street parking.

On each day and time listed above, all nominated locations were surveyed by vehicle and the number of occupied spaces was documented.

3.1.3 Calculation of parking occupancy

Parking occupancy is defined as the ratio of the number of occupied spaces to the total number of available spaces:

$$\text{Parking occupancy (\%)} = \frac{\text{Number of occupied spaces}}{\text{Total number of available spaces}}$$

3.2 Bells Avenue / Warringa Road, Cammeray

3.2.1 Parking supply

There is a total of 41 parking spaces on Bells Avenue / Warringa Road. These spaces are allocated as follows:

- Northern side, south of Amherst Street / Cammeray Road – 17 spaces – 8P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
- Southern side, south of Amherst Street / Cammeray Road – 24 spaces – 8P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)

The allocation of parking spaces is shown spatially in Figure 3-8.

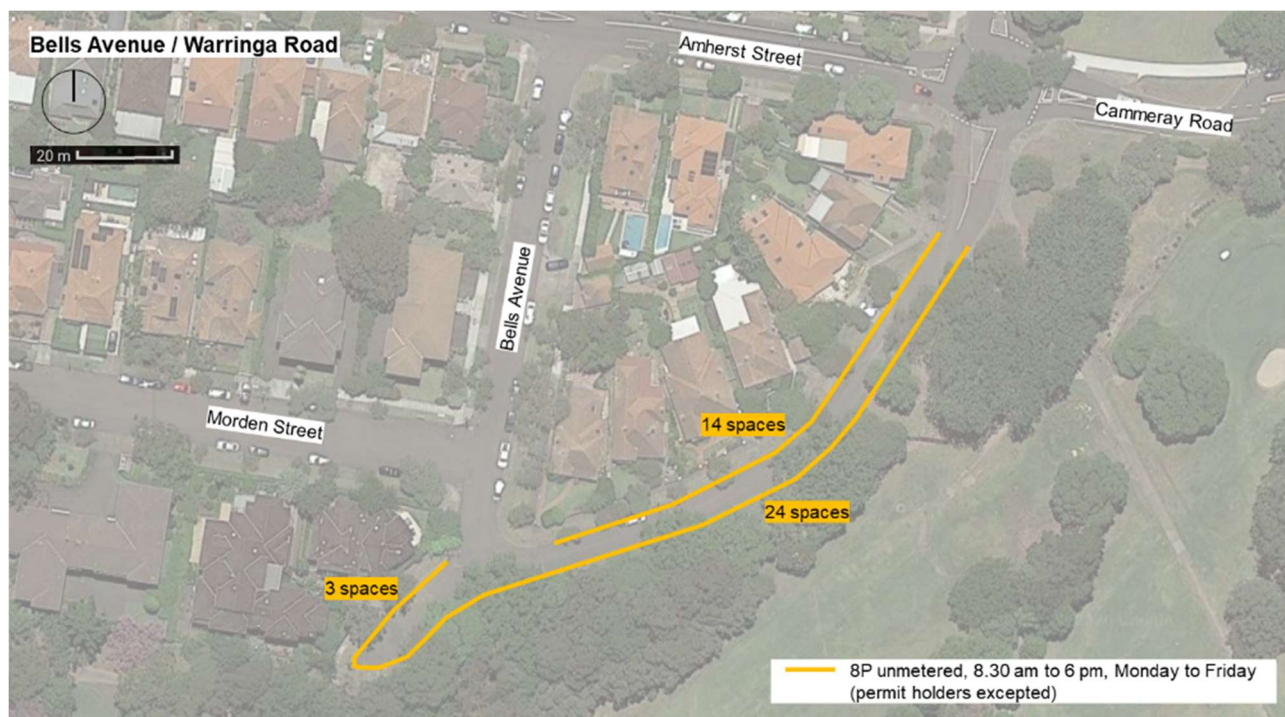


Figure 3-8 Existing parking supply – Bells Avenue / Warringa Road, Cammeray

3.2.2 Parking occupancy

Existing parking occupancies on Bells Avenue / Warringa Road during the various surveyed days and times are detailed in Table 3-2. The results show very low occupancies in all surveyed periods. Existing parking is likely associated with long-term resident / visitor parking servicing adjoining houses.

Table 3-2 Existing parking occupancy – Bells Avenue / Warringa Road, Cammeray

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
Average weekday	8.30 am (weekday morning peak / school drop-off)	4	37	41	10%
	3 pm (school pick up)	4	37	41	10%
	5 pm (weekday evening peak)	4	37	41	10%
	10 pm (weekday evening off-peak)	5	36	41	12%
Average weekend	12 pm (weekend day)	5	36	41	12%
	11 pm (weekend evening)	5	36	41	12%

3.3 Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray

3.3.1 Parking supply

There is a total of 22 parking spaces on Cammeray Avenue (adjacent to ANZAC Avenue Reserve). These spaces are allocated as follows:

- Northern side – 17 spaces – 2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
- Southern side – five spaces – 2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)

The allocation of parking spaces is shown spatially in Figure 3-9.



Figure 3-9 Existing parking supply – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray

3.3.2 Parking occupancy

Existing parking occupancies on Cammeray Avenue (adjacent to ANZAC Avenue Reserve) during the various surveyed days and times are detailed in Table 3-3. The results show the following:

- Overall occupancies vary throughout the surveyed periods
- The highest occupancies of 73 and 91 per cent were recorded in the weekday morning peak / school drop-off and school pick up periods. This is likely associated with parents / guardians dropping off and picking up students at ANZAC Park Public School
- ANZAC Avenue has about 50 on-street parking spaces. Spare capacity was observed in all surveyed periods with the exception of the weekday morning peak / school drop-off and school pick up periods

- The following surrounding streets were observed to have little to no spare parking capacity in all surveyed periods:
 - Lytton Street
 - Lillis Street
 - Moodie Street.

Table 3-3 Existing parking occupancy – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
Average weekday	8.30 am (weekday morning peak / school drop-off)	16	6	22	73%
	3 pm (school pick up)	20	2	22	91%
	5 pm (weekday evening peak)	3	19	22	14%
	10 pm (weekday evening off-peak)	4	18	22	18%
Average weekend	12 pm (weekend day)	6	16	22	27%
	11 pm (weekend evening)	7	15	22	32%

3.4 Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney

3.4.1 Parking supply

There is a total of seven parking spaces on Arthur Street (between Pacific Highway and Middlemiss Street). These spaces are allocated as follows:

- Eastern side – three spaces – 4P metered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
- Western side – four spaces – 4P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)

The allocation of parking spaces is shown spatially in Figure 3-10.

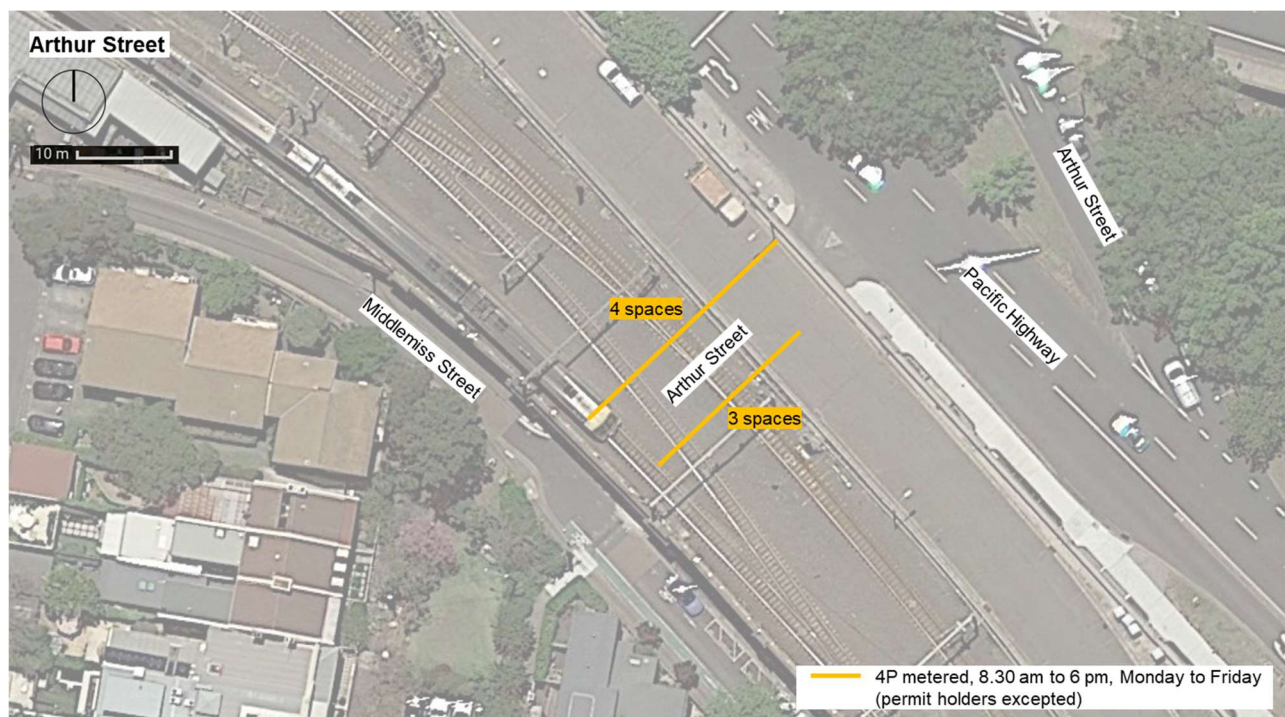


Figure 3-10 Existing parking supply – Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney

3.4.2 Parking occupancy

Existing parking occupancies on Arthur Street (between Pacific Highway and Middlemiss Street) during the various surveyed days and times are detailed in Table 3-4. The results show the following:

- Overall occupancies are consistently high throughout most of the surveyed periods
- The highest occupancies of 100 and 86 per cent were recorded during the day on weekdays. This is likely associated with short-term parking related to nearby businesses on Middlemiss Street and the broader North Sydney CBD area combined with resident parking
- The following surrounding streets were observed to have some spare parking capacity in all surveyed periods:
 - Mackenzie Street – minimum of two unoccupied spaces in all surveyed periods
 - Walker Street (south of Middlemiss Street) – minimum of two unoccupied spaces in all surveyed periods
 - Arthur Street (south of Middlemiss Street) – minimum of one unoccupied space in all surveyed periods.

Table 3-4 Existing parking occupancy – Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
Average weekday	8.30 am (weekday morning peak / school drop-off)	6	1	7	86%
	3 pm (school pick up)	6	1	7	86%

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
	5 pm (weekday evening peak)	7	0	7	100%
	10 pm (weekday evening off-peak)	5	2	7	71%
Average weekend	12 pm (weekend day)	4	3	7	57%
	11 pm (weekend evening)	5	2	7	71%

3.5 Alfred Street North, Neutral Bay

3.5.1 Parking supply

There is a total of 156 parking spaces on the northbound carriageway of Alfred Street North. These spaces are allocated as follows:

- Northbound carriageway, western side, between Kurraba Road and McIntosh Lane
 - South of Bent Street – 53 spaces – 9P metered, 9 am to 6 pm, Monday to Friday (permit holders excepted)
 - Between Bent Street and Ridge Street pedestrian bridge – 24 spaces – 9P metered, 9 am to 6 pm, Monday to Friday (permit holders excepted)
 - Between Ridge Street pedestrian bridge and McIntosh Lane – 40 spaces – 9P metered, 9 am to 6 pm, Monday to Friday (permit holders excepted)
- Northbound carriageway, eastern side, between Bent Street and Rose Avenue
 - Between Bent Street and Ridge Street pedestrian bridge
 - 16 spaces – 2P metered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
 - 10 spaces – 9P metered, 9 am to 6 pm, Monday to Friday (permit holders excepted)
 - Adjacent to 433 Alfred Street North
 - Two spaces – loading zone at all times
 - Three spaces – 1/2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
 - Between Winter Avenue and Rose Avenue – eight spaces – 2P metered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted).

The allocation of parking spaces is shown spatially in Figure 3-11.

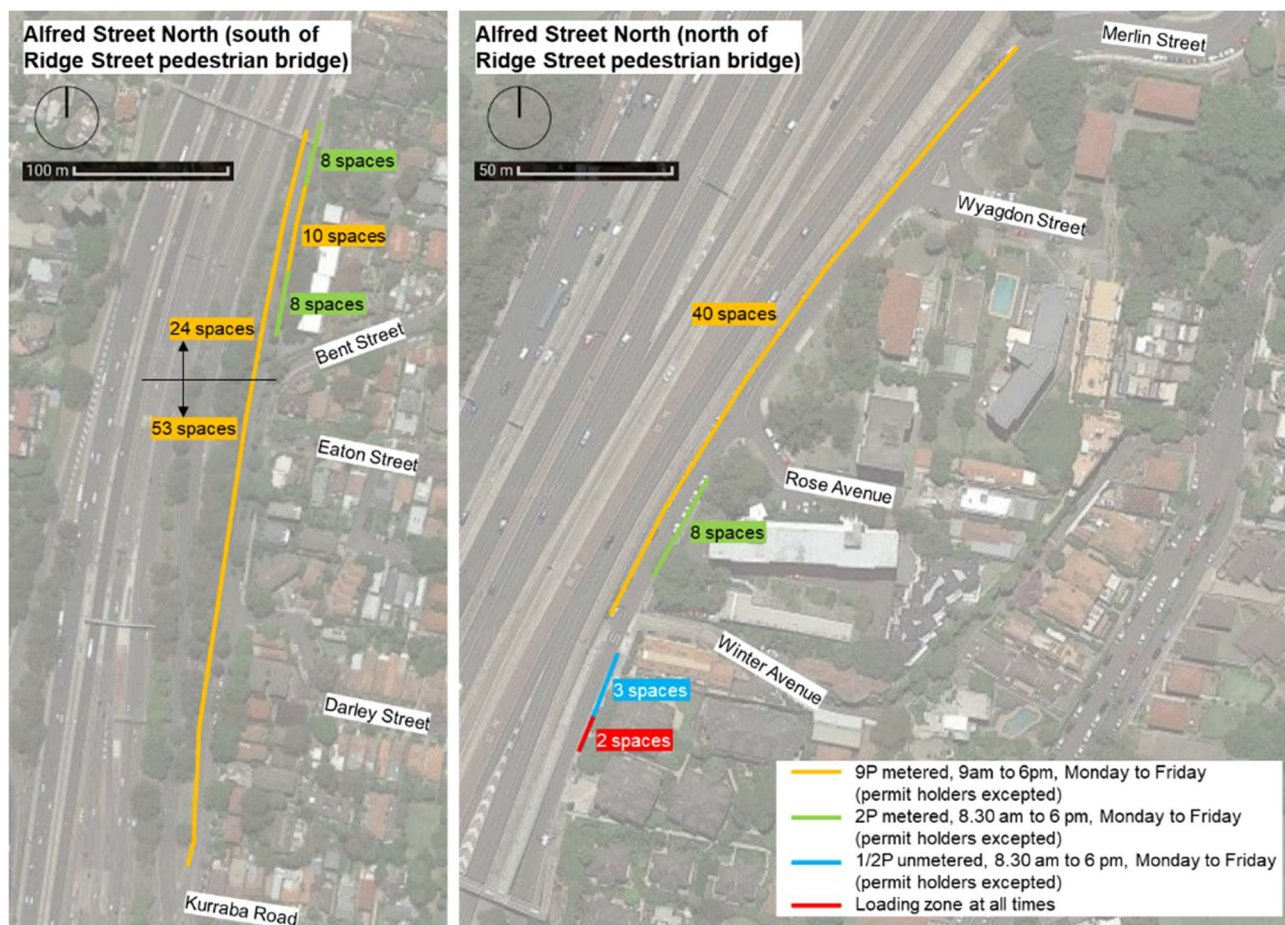


Figure 3-11 Existing parking supply – Alfred Street North (northbound carriageway), Neutral Bay

3.5.2 Parking occupancy

Existing parking occupancies on Alfred Street North (northbound carriageway) during the various surveyed days and times are detailed in Table 3-5. The results show the following:

- Overall occupancies are relatively low at below 50 per cent in all surveyed periods. However, parking was observed to be concentrated in the following locations:
 - Near Kurraba Road during weekday business hours – likely associated with long-term (i.e. greater than two hours) parking for workers in the North Sydney CBD
 - Near Bent Street and between just south of the Ridge Street pedestrian bridge and McIntosh Lane in all surveyed periods – likely associated with long-term resident / visitor parking servicing adjoining unit blocks and townhouses
- There is some spare capacity on Alfred Street North (northbound carriageway) between just south of the Ridge Street pedestrian bridge and McIntosh Lane in the weekday morning peak / school drop-off, school pick up, weekday evening peak and weekend day periods
- There is little to no spare parking capacity on Alfred Street North (northbound carriageway) between just south of the Ridge Street pedestrian bridge and McIntosh Lane in the weekday evening off-peak and weekend evening periods
- The following surrounding streets were observed to also have little to no spare parking capacity in all surveyed periods:
 - Alfred Street North (southbound carriageway)
 - Darley Street
 - Eaton Street

- Bent Street
- Rose Avenue
- Wyagdon Street
- Merlin Street.

Table 3-5 Existing parking occupancy – Alfred Street North (northbound carriageway), Neutral Bay

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
Average weekday	8.30 am (weekday morning peak / school drop-off)	52	104	156	33%
	3 pm (school pick up)	47	109	156	30%
	5 pm (weekday evening peak)	50	106	156	32%
	10 pm (weekday evening off-peak)	65	91	156	42%
Average weekend	12 pm (weekend day)	52	104	156	33%
	11 pm (weekend evening)	71	85	156	46%

3.6 Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray

3.6.1 Parking supply

There is a total of 26 parking spaces on Cammeray Avenue (south of ANZAC Avenue Reserve). These spaces are allocated as follows:

- Western side, adjacent to residential properties – Eight spaces – 2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
- Western side, south of residential properties – five spaces – 2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)

The allocation of parking spaces is shown spatially in Figure 3-12.

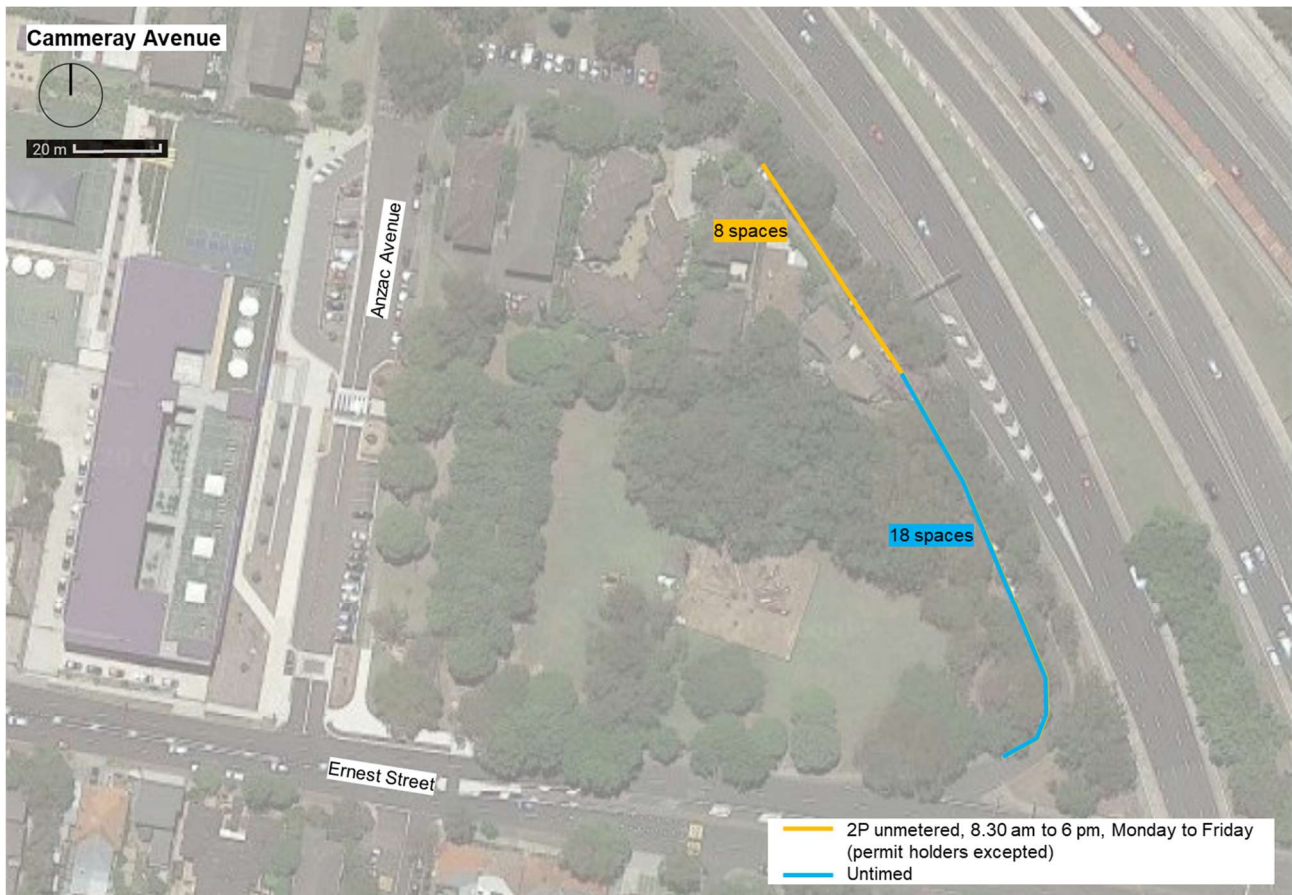


Figure 3-12 Existing parking supply – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray

3.6.2 Parking occupancy

Existing parking occupancies on Cammeray Avenue (adjacent to ANZAC Avenue Reserve) during the various surveyed days and times are detailed in Table 3-6. The results show the following:

- Overall occupancies vary throughout the surveyed periods
- The highest occupancies of 73 and 77 per cent were recorded in the weekday morning peak / school drop-off and school pick up periods. This is likely associated with parents / guardians dropping off and picking up students at ANZAC Park Public School
- ANZAC Avenue has about 50 on-street parking spaces. Spare capacity was observed in all surveyed periods with the exception of the weekday morning peak / school drop-off and school pick up periods
- The following surrounding streets were observed to have little to no spare parking capacity in all surveyed periods:
 - Lytton Street
 - Lillis Street
 - Moodie Street.

Table 3-6 Existing parking occupancy – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
Average weekday	8.30 am (weekday morning peak / school drop-off)	19	7	26	73%
	3 pm (school pick up)	20	6	26	77%
	5 pm (weekday evening peak)	15	11	26	58%
	10 pm (weekday evening off-peak)	17	9	26	65%
Average weekend	12 pm (weekend day)	8	18	26	31%
	11 pm (weekend evening)	13	13	26	50%

3.7 Ridge Street, North Sydney

3.7.1 Parking supply

There is a total of 90 parking spaces on Ridge Street. These spaces are allocated as follows:

- Northern side, east of Miller Street
 - Between Miller Street and Walker Street – 23 spaces – 8P metered (permit holders excepted)
 - 8.30 am to 6 pm, Monday to Thursday
 - 8.30 am to 11 pm, Friday
 - 10 am to 6 pm, Saturday and Sunday
 - East of Walker Street – 42 spaces – 8P metered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
- Southern side, east of Miller Street
 - Between Miller Street and Walker Street
 - 11 spaces – 2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
 - One space – 2P unmetered, 8.30 am to 3.30 pm, Monday to Friday; no parking, 7.30 am to 8.30 am and 3.30 pm to 6 pm on school days; untimed parking at all other times
 - Two spaces – no parking, 7.30 am to 6 pm, Monday to Friday; untimed parking at all other times
 - East of Walker Street – 11 spaces – 2P metered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted).

The allocation of parking spaces is shown spatially in Figure 3-13.

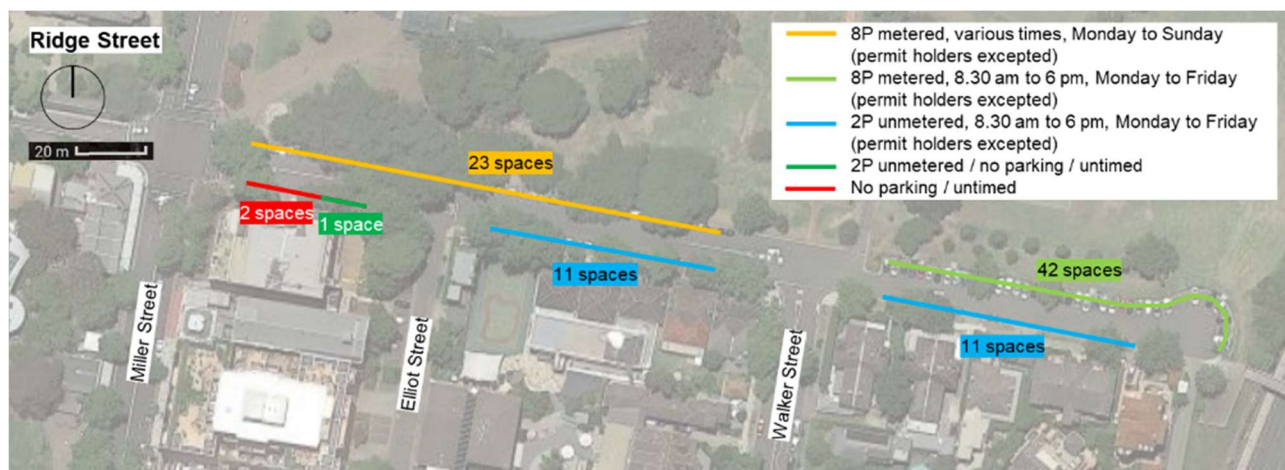


Figure 3-13 Existing parking supply – Ridge Street, North Sydney

3.7.2 Parking occupancy

Existing parking occupancies on Ridge Street during the various surveyed days and times are detailed in Table 3-7. The results show the following:

- Overall occupancies vary throughout the surveyed periods
- The highest occupancy of 90 per cent was recorded in the school pick up period
- At all times, parking was observed to be concentrated east of Walker Street. This is likely associated with long-term resident / visitor parking servicing adjoining unit blocks, townhouses and houses, and also short-term (i.e. less than two hours) parking associated with the North Sydney Bowling Club
- Some spare capacity was observed during a special event held at North Sydney Oval.

Table 3-7 Existing parking occupancy – Ridge Street, North Sydney

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
Average weekday	8.30 am (weekday morning peak / school drop-off)	49	39	88	56%
	3 pm (school pick up)	79	9	88	90%
	5 pm (weekday evening peak)	69	18	87	79%
	10 pm (weekday evening off-peak)	31	59	90	34%
Average weekend	12 pm (weekend day)	44	46	90	49%
	8 pm (special event) ³	71	19	90	79%

³ The parking survey on Saturday 28 November 2020 at 8 pm coincided with the Women's Big Bash League final between Sydney Thunder and Melbourne Stars that was held at North Sydney Oval.

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
	11 pm (weekend evening)	28	62	90	31%

3.8 Rosalind Street, Cammeray

3.8.1 Parking supply

There is a total of 22 parking spaces on Rosalind Street. These spaces are allocated as follows:

- Northern side, between Miller Street and ANZAC Avenue
 - Seven spaces – 2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)
 - One space – untimed
- Northern side, between Miller Street and ANZAC Avenue – 14 spaces – 2P unmetered, 8.30 am to 6 pm, Monday to Friday (permit holders excepted)

The allocation of parking spaces is shown spatially in Figure 3-14.

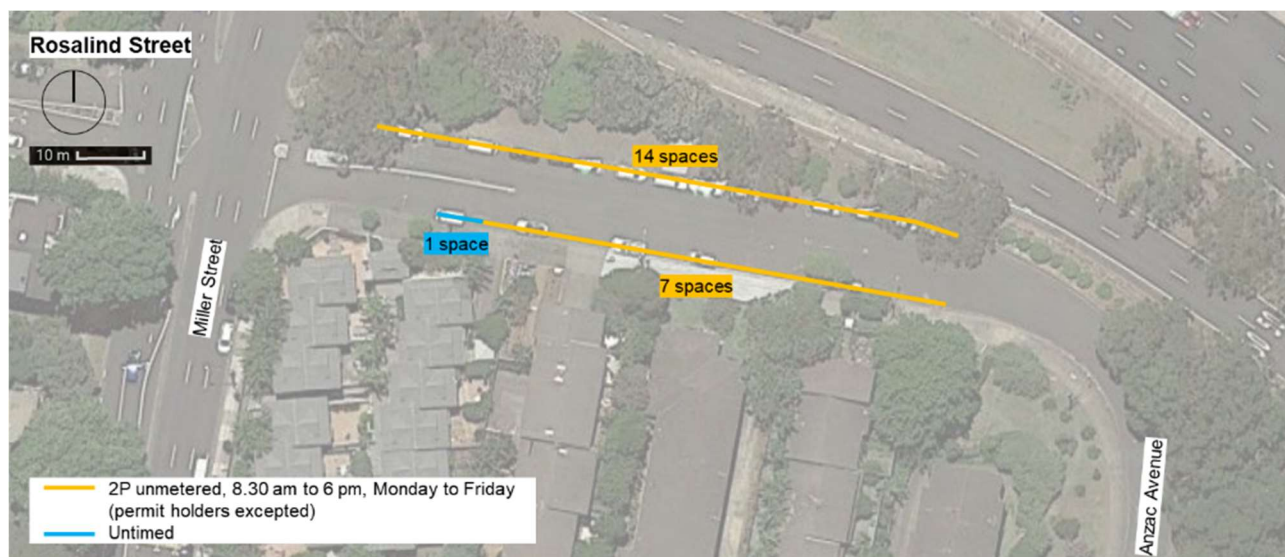


Figure 3-14 Existing parking supply – Rosalind Street, Cammeray

3.8.2 Parking occupancy

Existing parking occupancies on Rosalind Street during the various surveyed days and times are detailed in Table 3-8. The results show the following:

- Overall occupancies range between 68 per cent and 86 per cent
- The highest occupancy of 82 per cent was recorded in the school pick up, weekday evening off-peak and weekend evening periods. This is likely associated with school pick ups and long-term resident / visitor parking servicing adjoining unit blocks and townhouses.

Table 3-8 Existing parking occupancy – Rosalind Street, Cammeray

Day	Time period	Occupied spaces	Unoccupied spaces	Total available spaces	Parking occupancy
Average weekday	8.30 am (weekday morning peak / school drop-off)	15	7	22	68%
	3 pm (school pick up)	18	4	22	82%
	5 pm (weekday evening peak)	15	7	22	68%
	10 pm (weekday evening off-peak)	18	4	22	82%
Average weekend	12 pm (weekend day)	17	5	22	77%
	11 pm (weekend evening)	18	4	22	82%

3.9 Public transport accessibility

Compounds and work sites associated with the critical utility works have good public transport accessibility, with bus services located in close proximity. These are detailed in Table 3-9 and shown in Figure 3-15. These bus services provide connections to several railway stations for Sydney Trains services to destinations across Greater Sydney.

Table 3-9 Bus services at each compound and work site

Location	Nearest bus stops	Distance from compound / worksite	Bus services	Connections to Sydney Trains services
Alfred Street North work site	Stop ID 208923 – Rawson Street at Eaton Street Stop ID 208921 – Montpelier Street before Rawson Street	400 m to 500 m	Route 263 – Crow's Nest to City Bridge Street via Cremorne	North Sydney and Sydney CBD stations
	Stop ID 206048 – Miller Street at Ridge Street Stop ID 206018 – North Sydney Oval, Miller Street	400 m to 500 m	Routes 150X, 151, 154X, 168, 173, 188, 202-3, 207-9, 227-30, 245, 247 – services to Sydney CBD and various destinations across the North Shore and Northern Beaches	North Sydney, Milsons Point and Sydney CBD stations

Location	Nearest bus stops	Distance from compound / worksite	Bus services	Connections to Sydney Trains services
	Stop ID 208947 – Military Road opposite Watson Street Stop ID 208911 and 208912 – Military Road after Watson Street	400 m to 500 m	Routes 143-4, 150X, 151, 154X, 165-6X, 168-9, 169X, 170X, 173, 176-7X, 178, 178-9X, 180, 188, 227-30, 243-9, 257, 430 – services to Sydney CBD, Sydenham and various destinations across the North Shore and Northern Beaches	North Sydney, Milsons Point, Sydney CBD, St Leonards, Chatswood, Newtown, Sydenham
Ridge Street compound	Stop ID 206048 – Miller Street at Ridge Street Stop ID 206018 – North Sydney Oval, Miller Street	400 m to 500 m	Routes 150X, 151, 154X, 168, 173, 188, 202-3, 207-9, 227-30, 245, 247 – services to Sydney CBD and various destinations across the North Shore and Northern Beaches	North Sydney, Milsons Point and Sydney CBD stations
Cammeray Avenue work site	Stop ID 206216 – Miller Street before Ernest Street Stop ID 206215 – Miller Street before Ernest Street	400 m to 500 m	Routes 202-3, 207-9 – services to Sydney CBD and various destinations across the North Shore	North Sydney, Milsons Point and Sydney CBD stations
Rosalind Street compound	Stop ID 206217 – Miller Street at Rosalind Street Stop ID 206215 – Miller Street before Ernest Street	200 m	Routes 202-3, 207-9 – services to Sydney CBD and various destinations across the North Shore	North Sydney, Milsons Point and Sydney CBD stations

Location	Nearest bus stops	Distance from compound / worksite	Bus services	Connections to Sydney Trains services
Cammeray Golf Course work site	Stop ID 209024 – Earle Street opposite Grafton Street Stop ID 209025 – Grafton Street at Fall Street Stop ID 209012 – Earle Street opposite View Street Stop ID 209011 – Grafton Street opposite Fall Street	400 m	Route 201 – Cremorne to City Bridge Street Route 263 – Crow's Nest to City Bridge Street via Cremorne	North Sydney and Sydney CBD stations

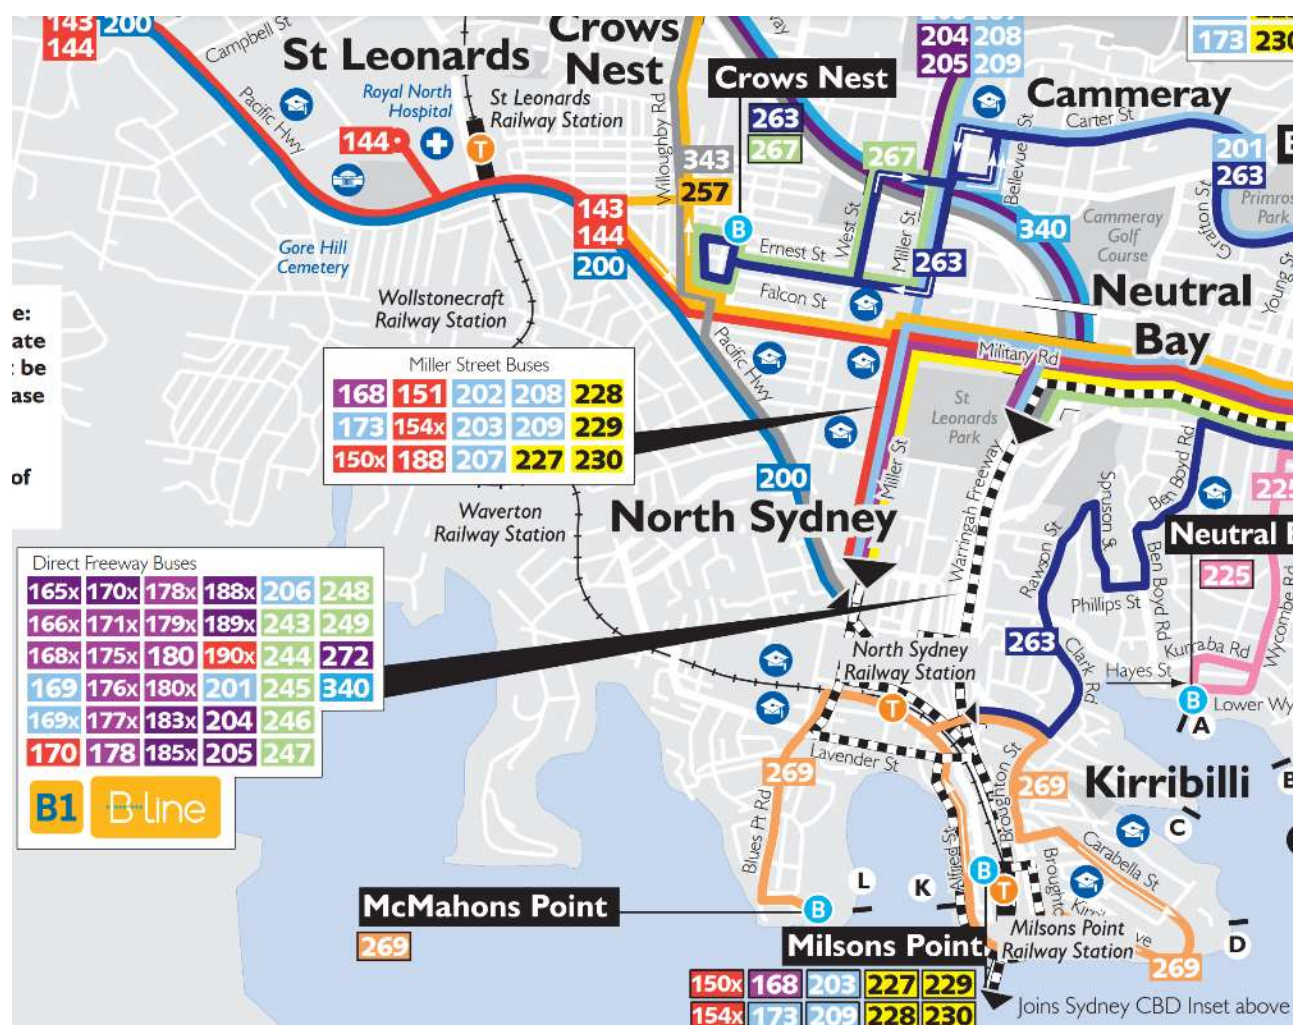


Figure 3-15 Bus network in Neutral Bay, North Sydney and Cammeray

4 Proposed parking and access changes and impacts

The temporary removal of on-street parking spaces during the critical utilities work in locations that are outside the approved CSSI footprint is addressed in Section 4.2. Car parking requiring removal inside the approved CSSI footprint has been considered in the EIS and has already been approved under the Infrastructure Approval (SSI-8863). Notwithstanding, car parking spaces that will be removed during the critical utilities work in locations that are within the approved CSSI footprint have been assessed and identified and are detailed in Section 4.3. Throughout construction there may be occasional times when short term on-street car parking removal (i.e. for the period of one shift) will be required under a Road Occupancy Licence (ROL). In these cases any short term on-street car parking removed will be reinstated at the end of each shift following expiration of the ROL. There may also be other occasional times when short term car parking removal (i.e. for the period of one shift) will be required due to progression of a utilities trench. In these cases any short term car parking removal will be reinstated at the end of each shift. Any such short term car parking removal will be managed in accordance with the TTAMP.

4.1 Construction workforce parking

The construction workforce will comprise of trades and construction personnel, and engineering, functional and administration staff. The size of the workforce will vary throughout the duration of the critical utility works program, with a reduction in personnel for evening and night shifts. The maximum size of the construction workforce is expected to be 90 people.

A total of 110 off-street parking spaces will be provided at the following locations:

- The Ridge Street compound will include about 60 off-street parking spaces. This will serve most of the construction workforce
- The Cammeray Golf Course work site will include about 50 off-street parking spaces. This will serve as construction workforce parking.

Assuming a worst-case scenario where 100 per cent of the construction workforce travels to work by car and there is no carpooling, there would be demand for 90 parking spaces. Given there will be a total of 110 off-street parking spaces, construction workforce parking is expected to have a minimal impact on on-street parking.

Where practical, essential vehicles (i.e., vehicles carrying tools, plant and other equipment to facilitate works) will be contained within the footprint of each work site with no impact on adjacent on-street parking.

4.2 Locations outside the approved CSSI footprint

4.2.1 Bells Avenue / Warringa Road, Cammeray

The temporary removal of on-street parking spaces during the critical utility work on Bells Avenue / Warringa Road is no longer required. The 3 parking spaces have been reinstated.

4.2.2 Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray

Impact of parking changes

The critical utility works on Cammeray Avenue (adjacent to ANZAC Avenue Reserve) will result in the long-term temporary removal of eight on-street parking spaces on the northern side of Cammeray Avenue between June 2021 and December 2022 (refer to Figure 4-1). The long-term temporary removal of these spaces is required to facilitate the following works:

- Relocation of existing in-ground Ausgrid assets
- Removal of existing disused in-ground Ausgrid assets

- Relocation of existing in-ground Sydney Water assets
- Relocation of existing in-ground communication provider assets
- Installation of new permanent ITS node and temporary connections.



Figure 4-1 Long-term temporary removal of on-street parking – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray (indicative only – exact location subject to change)

The removal of these spaces will impact:

- Parents / guardians dropping off and picking up students at ANZAC Park Public School on school days
- Long-term resident / visitor parking servicing adjoining unit blocks, townhouses and houses at all times.

As described in Section 3.3.2, ANZAC Avenue was observed to have spare capacity in all surveyed periods with the exception of the weekday morning peak / school drop-off and school pick up periods. Outside of these periods, the spare parking capacity on ANZAC Avenue is likely to be able to accommodate the displacement of parking on Cammeray Avenue (adjacent to ANZAC Avenue Reserve) based on the parking occupancies detailed in Table 3-3. Therefore, the impacts are considered as follows:

- Major impact for parents / guardians dropping off and picking up students at ANZAC Park Public School during school drop-off and pick up periods – mitigation measures are required
- Minor impact for residents / visitors at all other times – mitigation measures are not required.

Comparison of impacts assessed in the EIS

The WHTWTFU EIS did not assess the impact of parking changes on Cammeray Avenue (adjacent to ANZAC Avenue Reserve).

4.2.3 Arthur Street (between Pacific Highway and Middlemiss Street), North Sydney

The temporary removal of on-street parking spaces during the critical utility work on Arthur Street (between Pacific Highway and Middlemiss Street, North Sydney) is no longer required. The 4 parking spaces have been reinstated.

4.3 Locations within the approved CSSI footprint

4.3.1 Alfred Street North, Neutral Bay

The temporary removal of on-street parking spaces during the critical utility work on Alfred Street North is no longer required. The 72 parking spaces have been reinstated.

4.3.2 Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray

Impact of parking changes

The critical utility works on Cammeray Avenue (south of ANZAC Avenue Reserve) will result in the long-term temporary removal of 26 on-street parking spaces on the western side of Cammeray Avenue between June 2021 and December 2022 (refer to Figure 4-2). The long-term temporary removal of these spaces is required to facilitate the following works:

- Relocation of existing in-ground Ausgrid assets
- Removal of existing disused in-ground Ausgrid assets
- Relocation of existing in-ground Sydney Water assets
- Relocation of existing in-ground communication provider assets
- Installation of new permanent ITS node and temporary connections.

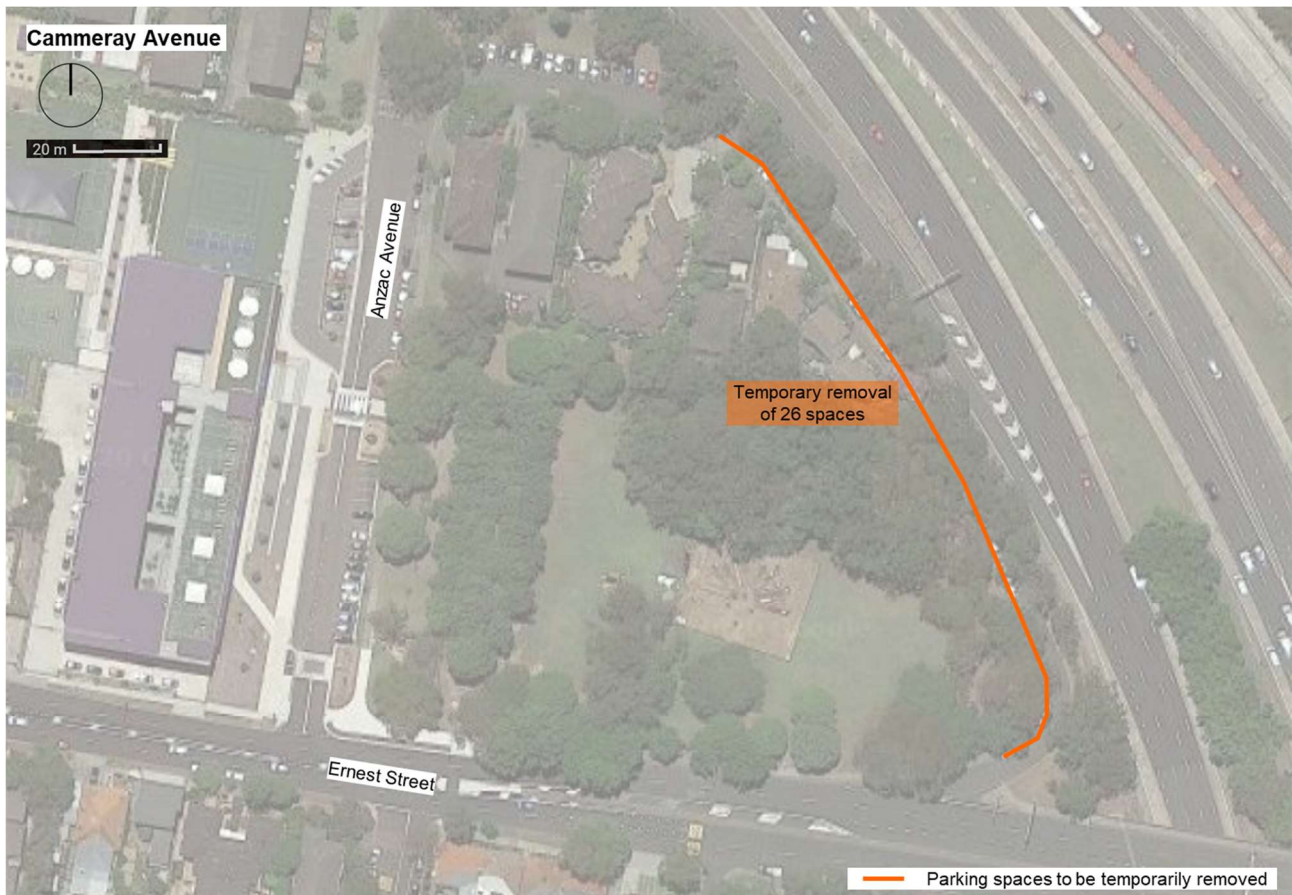


Figure 4-2 Long-term temporary removal of on-street parking – Cammeray Avenue (south of ANZAC Avenue Reserve), Cammeray (indicative only – exact location subject to change)

The removal of these spaces will impact:

- Parents / guardians dropping off and picking up students at ANZAC Park Public School on school days
- Long-term resident / visitor parking servicing adjoining unit blocks, townhouses and houses at all times.

As described in Section 3.6.2, ANZAC Avenue was observed to have spare capacity in all surveyed periods with the exception of the weekday morning peak / school drop-off and school pick up periods. Outside of these periods, the spare parking capacity on ANZAC Avenue is likely to be able to accommodate the displacement of parking on Cammeray Avenue (adjacent to ANZAC Avenue Reserve) based on the parking occupancies detailed in Table 3-6. Therefore, the impacts are considered as follows:

- Major impact for parents / guardians dropping off and picking up students at ANZAC Park Public School during school drop-off and pick up periods – mitigation measures are required
- Minor impact for residents / visitors at all other times – mitigation measures are not required.

Comparison of impacts assessed in the EIS

The WHTWTFU EIS did not assess the impact of parking changes on Cammeray Avenue (south of ANZAC Avenue Reserve).

4.3.3 Ridge Street, North Sydney

Impact of parking changes

Establishment and operation of the Ridge Street compound will result in the long-term temporary removal of six on-street parking spaces at the eastern end of Ridge Street between February 2021 and December 2022 (refer to Figure 4-3). SPA will continue to coordinate our activities with the WFU Main Works contractor regarding hand over of the Ridge Street compound from SPA to Main Works. The long-term temporary removal of these spaces is required to facilitate access to and from the compound.

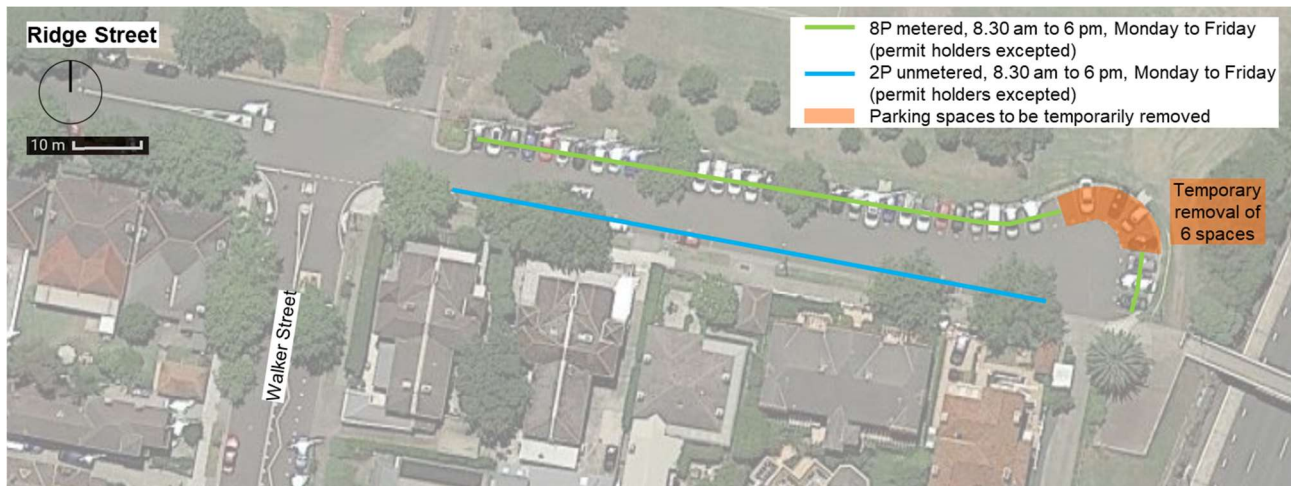


Figure 4-3 Long-term temporary removal of on-street parking – Ridge Street, North Sydney (indicative only – exact location subject to change)

The removal of these spaces will impact long-term resident / visitor parking servicing adjoining unit blocks, townhouses and houses, and also short-term parking associated with the North Sydney Bowling Club. However, existing parking occupancy as detailed in Table 3-7 shows there is spare capacity to accommodate the displacement of parking with a minimum of nine unoccupied spaces elsewhere on Ridge Street during the surveyed periods. Therefore, the impact is considered minor and mitigation measures are not required.

Comparison with impacts assessed in the EIS

Section 5.3.4 of Appendix F (Traffic and Transport) of the WHTWUFU EIS states that operation of the Ridge Street compound would result in the removal 12 on-street parking spaces. This compares to the proposed temporary removal of six on-street parking spaces on Ridge Street as part of the critical utility works that are the subject of this CPAS.

4.3.4 Rosalind Street, Cammeray

The temporary removal of on-street parking spaces during the critical utility work on Rosalind Street is no longer required. The 3 parking spaces have been reinstated.

5 Mitigation measures

5.1 Potential mitigation measures

Potential measures that were considered to mitigate the identified impacts of the long-term temporary removal of on-street parking include the following:

- Consultation with affected stakeholders of parking proposed to be removed
- Staging the removal of on-street parking
- Consideration of alternative parking locations and / or arrangements
- Provision of a shuttle bus service for the construction workforce
- Introduction of parking restrictions near compounds and work sites where they currently do not exist, or alteration of existing parking restrictions
- Daily workforce parking to be contained within the footprint of individual work sites
- Provision of parking at ancillary facilities
- Ancillary facility design to considered impacts to pedestrian and shared user paths
- Encouraging use of public transport
- Encouraging carpooling
- Ongoing communication with workforce on measures to reduce impacts to parking and access
- Parking demand reduction (through the use of other transport modes).

5.2 Construction workforce parking

As described in Section 4.1, construction workforce parking is expected to have a minimal impact on on-street parking given the provision of off-street parking at the Ridge Street, Cammeray Golf Course and Rosalind Street compounds. In addition:

- Where practical, essential vehicles (i.e., vehicles carrying tools, plant and other equipment to facilitate works) will be contained within the footprint of each work site with no impact on adjacent on-street parking
- The provision of parking at ancillary facilities means there will be no requirement to idle and queue on state and regional roads
- The provision of parking at ancillary facilities, and the limited number of deliveries required at work sites, means there will be no requirement to marshal construction vehicles
- The ancillary facilities have been designed so that construction vehicles will not block access across pedestrian or shared user paths at any time.

However, the following measures will be in place for the construction workforce to reduce the potential for an unexpected impact to occur:

- Encouragement of the use of public transport – through the recruitment and onboarding process and site toolbox talks to reduce the number of private vehicles travelling to and from the compounds
- Encouragement of carpooling – site toolbox talks will be utilised to encourage the construction workforce on the same shifts to coordinate with others to carpool to / from similar locations
- Communication of parking restrictions to the construction workforce – parking restrictions around the compounds and work sites will be communicated to the construction workforce

through site inductions where they will be supplied with a Project Worker Code of Conduct, site toolbox talks, and pre-start meetings as required. Where workers are impacting the amenity of adjacent residents, are not complying with the Project Worker Code of Conduct, or are repeatedly parking inappropriately, they may be required re-attend the site inductions. Stronger sanctions, up to and including dismissal, may be implemented for repeat offenders at the discretion of the Project Manager.

5.3 Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray

As described in Section 4.2.1, the impact of the long-term temporary removal of on-street parking on Cammeray Avenue (adjacent to ANZAC Avenue Reserve) is considered as follows:

- Major impact for parents / guardians dropping off and picking up students at ANZAC Park Public School during school drop-off and pick up periods
- Minor impact for residents / visitors at all other times.

Potential measures that have been considered to mitigate the identified impacts of the long-term temporary removal of on-street parking on Cammeray Avenue (adjacent to ANZAC Avenue Reserve) are detailed in Table 5-1. As detailed in Section 1 of this CPAS, no additional mitigation measures were identified following consultation with affected stakeholders associated with the removal of on-street car parking at this location.

Table 5-1 Consideration of potential mitigation measures – Cammeray Avenue (adjacent to ANZAC Avenue Reserve), Cammeray

Potential mitigation measure	Applicability to location	Justification
Consultation with affected stakeholders	Yes	Consultation has occurred with affected stakeholders prior to the removal of car parking.
Staging the removal of on-street parking	No	Staging the removal of on-street parking is not possible due to site constraints and the desire to minimise the duration of works given the broader impacts of works on residents.
Consideration of alternative parking locations and / or arrangements	No	Alternative parking locations have not been considered given there are no feasible locations near Cammeray Avenue.

Potential mitigation measure	Applicability to location	Justification
Provision of a shuttle bus service for the construction workforce	No	<p>The Rosalind Street compound, which has provision for off-street parking, is easily accessible by foot</p> <p>A shuttle bus service would not be practical given:</p> <ul style="list-style-type: none"> • The scope of the critical utility works is tool and equipment-intensive rather than labour-intensive • The varied nature of the works means construction workforce numbers are highly variable.
Introduction of parking restrictions near compounds and work sites where they currently do not exist, or alteration of existing parking restrictions	No	Existing parking restrictions already provide priority to residents with permits.
Daily workforce parking to be contained within the footprint of individual work sites	No	The Cammeray Avenue work site is contained within the on-street car parking spaces.
Provision of parking at ancillary facilities	Yes	Workforce car parking has been provided at the nearby Rosalind Street ancillary facility.
Ancillary facility design to considered impacts to pedestrian and shared user paths	No	Cammeray Avenue is a work site contained within on-street car parking spaces, not an ancillary facility.
Encouraging use of public transport	Yes	Workforce will be encouraged to use public transport throughout construction.
Encouraging carpooling	Yes	Workforce will be encouraged to carpool throughout construction. This will reduce the demand on workforce parking provided within ancillary facilities.
Ongoing communication with workforce on measures to reduce impacts to parking and access	Yes	Parking and access impacts will be communicated to the workforce throughout construction via inductions and toolbox talks.

Potential mitigation measure	Applicability to location	Justification
Parking demand reduction (through the use of other transport modes)	No	Parking demand reduction measures have not been considered given the disparate origins and destinations of residents and workers in the area.

6 Monitoring and reporting

6.1 Monitoring of mitigation measures

Monitoring to assess the effectiveness of this CPAS will be undertaken on roads that have been impacted by the long-term temporary removal of on-street parking, i.e., Alfred Street North, Neutral Bay; Ridge Street, North Sydney; Cammeray Avenue, Cammeray; Rosalind Street, Cammeray; Bells Avenue / Warringa Road, Cammeray; and Arthur Street, North Sydney.

Inspections will be undertaken at fortnightly intervals (with the exception of Arthur Street, North Sydney, which will be undertaken weekly) and will involve the following:

- Confirmation that where alternative parking arrangements have been provided, these are being implemented
- Monitoring the impacts of the removal of on-street parking on surrounding roads
- Inspections for the presence of construction workforce parking on local roads.

Inspections will be undertaken by project engineers. The Project Manager will be responsible for implementing the mitigation measures contained in this CPAS with support from the Traffic Manager.

6.2 Corrective actions

Where monitoring or community complaints identify non-conformances with this CPAS, corrective actions will be undertaken through the project's non-conformance works procedure. Corrective actions will be documented as per the procedure. Where practicable, non-conformances and corresponding corrective actions will be communicated to the construction workforce and reinforced through various communications including but not limited to:

- Site toolbox talks
- Pre-start meetings
- Project alerts
- Investigation and implementation of alternative methods to reinforce this CPAS
- Investigation and implementation of other viable options for the construction workforce to use public transport
- Issue warning notices where the owner of an offending vehicle can be identified
- Documenting actions in weekly and monthly internal reports.

Refer to Section 3.8 of the Construction Environmental Management Plan (CEMP) for further detail on environmental non-conformances.

6.3 Reporting

A quarterly summary report will be provided to North Sydney Council, DPIE and TfNSW regarding the outcomes of the monitoring that has been undertaken in the preceding quarter. Details of non-conformances and corrective actions will be summarised.

6.4 Contingency measures

Contingency measures will depend on the issues / non-conformances identified during monitoring and the effectiveness of corrective actions that have been implemented as described in Sections 6.1 and 6.2, respectively.

Contingency measures will be investigated if it is determined that the corrective actions implemented are ineffective, and may include:

- Investigating the potential to provide additional off-street parking for the construction workforce
- Revising site induction and site toolbox talk content to better encourage the use of public transport and communicate designated and prohibited locations for construction workforce parking
- Amending carpooling communications to encourage an increase in participation rates
- Implementing disciplinary processes for repeated non-conformances.

6.5 Update and amendment of this CPAS

Any revisions to this CPAS will be in accordance with the process outlined in Section 3.12 of the CEMP and will be provided to TfNSW for review and comment and forwarded to the Secretary of DPIE for approval.

A copy of the updated CPAS and record of changes will be distributed to all relevant stakeholders in accordance with the approved document control procedure.

Appendix A1 Parking survey data

	Monday 14 Dec 2020				Tuesday 15 Dec 2020				Wednesday 16 Dec 2020				Thursday 26 Nov 2020				Friday 18 Dec 2020				Saturday 28 Nov 2020				Sunday 13 Dec 2020		
	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	12pm	8pm (special event)	11pm	12pm	11pm		
Alfred Street North	55	51	46		69	53	48	51	70	53	45	47	62	46	44	45	65	55	46	60	61	44	N/A	71	60	71	
Ridge Street	51	80	78		21	51	80	69	29	49	81	69	37	51	77	79	35	44	78	48	31	48	71	29	39	27	
Cammeray Avenue (south of ANZAC Avenue Reserve)	18	23	13		18	19	21	14	16	20	25	13	16	24	15	20	17	16	18	14	17	7		10	9	15	
Cammeray Avenue (adjacent to ANZAC Avenue Reserve)	19	17	4		4	21	19	2	4	19	22	2	3	18	22	5	7	4	20	4	3	7		8	5	6	
Rosalind Street	15	19	18		19	15	18	14	18	15	22	14	17	16	15	15	18	13	17	13	17	16	N/A	19	17	17	
Bells Avenue / Warringa Road	3	5	3		6	4	3	6	6	5	3	3	3	5	4	5	5	5	4	5	3	3	N/A	4	6	6	
	Monday 24 May 2021				Tuesday 25 May 2021				Wednesday 26 May 2021				Thursday 27 May 2021				Friday 28 May 2021				Saturday 29 May 2021				Sunday 30 May 2021		
	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	8.30am	3pm	5pm	10pm	12pm	11pm		12pm	11pm		
Arthur Street (between Pacific Highway and Middlemiss Street)	6	7	7	5	7	6	7	4	6	7	7	5	7	5	6	6	5	7	7	3	4		4	3	5		
	Average weekday																										
	8.30am	3pm	5pm	10pm																							
Alfred Street North	52	47	50	65																							
Ridge Street	49	79	69	31																							
Cammeray Avenue (south of ANZAC Avenue Reserve)	19	20	15	17																							
Cammeray Avenue (adjacent to ANZAC Avenue Reserve)	16	20	3	4																							
Rosalind Street	15	18	15	18																							
Bells Avenue / Warringa Road	4	4	4	5																							
Arthur Street (between Pacific Highway and Middlemiss Street)	6	6	7	5																							
	Average weekend																										
	12pm	11pm																									
Alfred Street North	52	71																									
Ridge Street	44	28																									
Cammeray Avenue (south of ANZAC Avenue Reserve)	8	13																									
Cammeray Avenue (adjacent to ANZAC Avenue Reserve)	6	7																									
Rosalind Street	17	18																									
Bells Avenue / Warringa Road	5	5																									
Arthur Street (between Pacific Highway and Middlemiss Street)	4	5																									

Appendix A2 Additional CoA and REMM compliance table

Additional CoA and REMM relevant to the development of the CUT CPAS are presented in Table A-6-5 below.

Table A-6-5 CoA and REMM relevant to the development of this CPAS

Source / Condition	Condition requirements	Where addressed in CPAS and/or TTAMP
CoA E141	During construction, all reasonably practicable measures must be implemented to maintain pedestrian and vehicular access to, and parking in the vicinity of, businesses and affected properties. Disruptions are to be avoided, and where avoidance is not possible, minimised. Where disruption cannot be minimised, alternative pedestrian and vehicular access, and parking arrangements must be developed in consultation with affected businesses and implemented prior to the disruption. Adequate signage and directions to businesses must be provided prior to, and for the duration of, any disruption.	Section 5 Also refer to the TTAMP
CoA E138	Safe pedestrian and cyclist access must be maintained around work sites during construction. In circumstances where pedestrian and cyclist access is restricted or removed due to construction activities, a proximate alternative route which complies with relevant standards, unless otherwise endorsed by an independent, appropriately qualified and experienced person, must be provided (including signposting) prior to the restriction or removal of the impacted access.	Refer to the TTAMP
CoA E149	Where bus stops are required to be temporarily closed, such closure must not occur until relocated bus stops that comply with relevant standards, are functioning, have similar capacity and amenity and are relocated within a 400 metre walking distance of the existing bus stop. Closures and relocation of bus stops during construction must be undertaken in consultation with relevant council(s). Wayfinding signage must be provided directing commuters to adjacent or relocated bus stops. Footpaths and (where required) road crossing facilities must be provided to any relocated bus stops such that accessibility and safety standards are met.	N/A – No bus stops will be required to be closed as part of the CUT works subject to this CPAS.
CoA E150	Prior to the commencement of operation, all bus stops temporarily closed must be reinstated in a manner that complies with relevant standards, provides equal or improved	N/A – No bus stops will be required to be closed as part of

Source / Condition	Condition requirements	Where addressed in CPAS and/or TTAMP
	capacity, amenity and accessibility (including footpaths and road crossings) in consultation with relevant council(s).	the CUT works subject to this CPAS.
REMM CTT9	Where provision of construction on-site parking cannot accommodate the full construction workforce, feasible and reasonable management measures that minimise impacts on parking on local roads will be identified and implemented. Depending on the location, management measures may include workforce shuttle buses and the use of public transport.	Section 5 Also refer to the TTAMP
REMM CTT10	Any adjustments to existing bus stops will be determined in consultation with relevant stakeholders including other divisions of Transport for NSW and advanced notification will be provided to affected bus customers. Relocations will be as close as feasible and reasonable to their existing position.	N/A – No bus stops will be required to be closed as part of the CUT works subject to this CPAS.

Appendix A3 Parking

Community Notification for Extension to

Warringah Freeway Upgrade Service and utility work

Ongoing temporary removal of on-street parking

Utility relocation and installation will continue for the next five months, weather permitting.

To support this work, we will need to temporarily keep using 35 on-street parking spaces intermittently at Cammeray Avenue, Cammeray.

We understand the ongoing temporary removal of these spaces may be inconvenient for local residents. As part of our ongoing commitment to work collaboratively with our stakeholders including local residents, we have been working to reduce or offset the loss of parking spaces during construction, wherever possible. Our ongoing use of these spaces is required to allow us to safely carry out our early work activities.

There may be further impacts to local parking during main construction activities and further information will be provided to residents as soon as detailed construction planning is finalised.

To view a map of our ongoing temporary on-street parking removal locations near you please visit the portal at: nswroads.work/wfuportal and follow the link to the 'construction notification map'.

We encourage you to provide us feedback on the temporary removal of on-street parking spaces. Should you wish to provide feedback, ask questions or learn more, please contact the project team.

Warringah Freeway Upgrade Service and utility work

Ongoing temporary removal of on-street parking

Utility relocation and installation will continue for the next five months, weather permitting.

To support this work, we will need to temporarily keep using 35 on-street parking spaces intermittently at Cammeray Avenue, Cammeray.

We understand the ongoing temporary removal of these spaces may be inconvenient for local residents. As part of our ongoing commitment to work collaboratively with our stakeholders including local residents, we have been working to reduce or offset the loss of parking spaces during construction, wherever possible. Our ongoing use of these spaces is required to allow us to safely carry out our early work activities.

There may be further impacts to local parking during main construction activities and further information will be provided to residents as soon as detailed construction planning is finalised.

To view a map of our ongoing temporary on-street parking removal locations near you please visit the portal at: nswroads.work/wfuportal and follow the link to the 'construction notification map'.

We encourage you to provide us feedback on the temporary removal of on-street parking spaces. Should you wish to provide feedback, ask questions or learn more, please contact the project team.

Warringah Freeway Upgrade Service and utility work

Ongoing temporary removal of on-street parking

Utility relocation and installation will continue for the next five months, weather permitting.

To support this work, we will need to temporarily keep using 35 on-street parking spaces intermittently at Cammeray Avenue, Cammeray.

We understand the ongoing temporary removal of these spaces may be inconvenient for local residents. As part of our ongoing commitment to work collaboratively with our stakeholders including local residents, we have been working to reduce or offset the loss of parking spaces during construction, wherever possible. Our ongoing use of these spaces is required to allow us to safely carry out our early work activities.

There may be further impacts to local parking during main construction activities and further information will be provided to residents as soon as detailed construction planning is finalised.

To view a map of our ongoing temporary on-street parking removal locations near you please visit the portal at: nswroads.work/wfuportal and follow the link to the 'construction notification map'.

We encourage you to provide us feedback on the temporary removal of on-street parking spaces. Should you wish to provide feedback, ask questions or learn more, please contact the project team.

To speak to the team please contact us on **1800 931 189** or at **whtbl@transport.nsw.gov.au**

We thank you for your patience and cooperation while we deliver this important work.

To speak to the team please contact us on **1800 931 189** or at **whtbl@transport.nsw.gov.au**

We thank you for your patience and cooperation while we deliver this important work.

To speak to the team please contact us on **1800 931 189** or at **whtbl@transport.nsw.gov.au**

We thank you for your patience and cooperation while we deliver this important work.

For more information

For latest work updates, please use the QR code or visit **nswroads.work/wfuportal**



If you would like to know more or make a complaint, please contact us on **1800 931 189** or at **whtbl@transport.nsw.gov.au**



If you need help understanding this information, please contact the Translating and Interpreting Service on **131 450** and ask them to call us on **1800 931 189**

For more information

For latest work updates, please use the QR code or visit **nswroads.work/wfuportal**



If you would like to know more or make a complaint, please contact us on **1800 931 189** or at **whtbl@transport.nsw.gov.au**



If you need help understanding this information, please contact the Translating and Interpreting Service on **131 450** and ask them to call us on **1800 931 189**

For more information

For latest work updates, please use the QR code or visit **nswroads.work/wfuportal**



If you would like to know more or make a complaint, please contact us on **1800 931 189** or at **whtbl@transport.nsw.gov.au**



If you need help understanding this information, please contact the Translating and Interpreting Service on **131 450** and ask them to call us on **1800 931 189**