


- ### Sequence Of Works

1. Prior to commencement of excavation the following soil management devices must be installed.
- 1.1. Construct silt fences below the site and across all potential runoff sites.
- 1.2. Construct temporary construction entry/exit and divert runoff to suitable control systems.
- 1.3. Construct measures to divert upstream flows into existing stormwater system.
- 1.4. Construct sedimentation traps/basin including outlet control and overflow.
- 1.5. Construct silt lined swales.
- 1.6. Provide sandbag sediment traps upstream of existing pits.
2. Construct geotextile filter pit surround around all proposed pits as they are constructed.
3. On completion of pavement provide sand bag kerb inlet sediment traps around pits.
4. Provide and maintain a strip of turf on both sides of all roads after the construction of kerbs.


Prior to discharge of site stormwater, groundwater and seepage water into council's stormwater system, contractors must undertake water quality tests in conjunction with a suitably qualified environment consultant outlining the following:

- Compliance with the criteria of the Australian and New Zealand Guidelines for Fresh and Marine Water Quality (2000)
- If required subject to the environmental consultants advice, provide remedial measures to improve the quality of water that is to be discharged into Councils storm water drainage system. This should include comments from a suitably qualified environmental consultant confirming the suitability of these remedial measures to manage the water discharged from the site into Councils storm water drainage system. Outlining the proposed, ongoing monitoring, contingency plans and validation program that will be in place to continually monitor the quality of water discharged from this site. This should outline the frequency of water quality testing that will be undertaken by a suitably qualified environmental consultant.

	Batter
	Jersey kerb with fence
	Stormwater pit with Geotextile filter surround
	Hay bale barriers
	Sandbag sediment trap

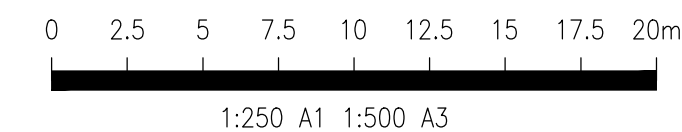

FOR CONSTRUCTION

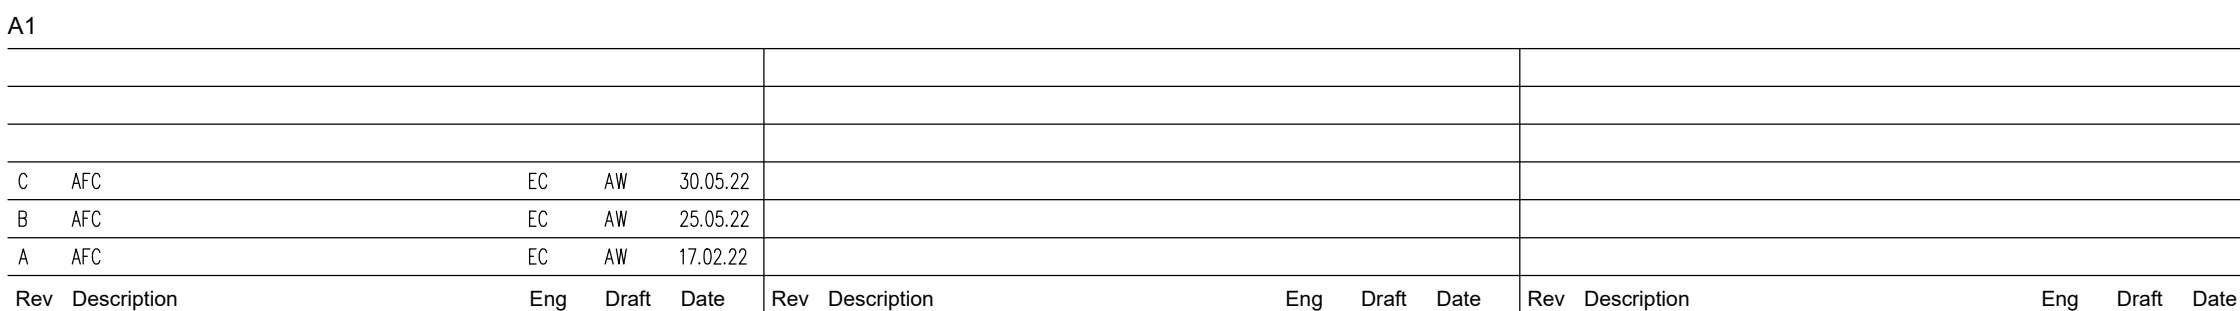

NSW ARCHITECTS REGISTRATION BOARD
NOMINATED ARCHITECTS

80/81 HERRIDGE AVENUE
2018 MORTIMOR ROAD
7/15 JARVIS AVENUE
30/3 NORTON ROAD
1/151 PHILLIP ROAD
40/3 JAMES STREET

Telephone +61 2 8297 7290
Facsimile +61 2 8297 7296
www.han.com.au

TTW Structural
Civil
Traffic
Façade

612 9439 7288 | 48 Chandos Street St Leonards NSW 2065

Sheet Subject

EROSION AND SEDIMENT CONTROL PLAN

Scale : A1	Drawn	Authorised
1:250	AW	EC
Job No	Drawing No	Revision
191797	CI-20B-000-01	C
Plot File Created: May 30, 2022 - 9:33am		