



PLAN
SCALE 1:250



NOTE:
ALL INTERNAL DRAINAGE TO BE CO-ORDINATED AND RELEVANT EROSION AND SEDIMENT CONTROL DEVICES IMPLEMENTED.

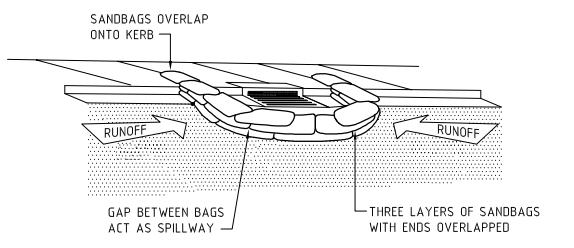

SEDIMENT TRAP FOR KERB INLET (AT LOW POINT - SANDBAG)
NOT TO SCALE

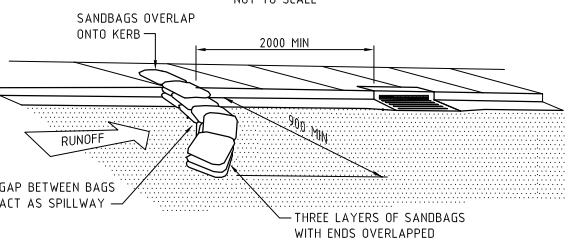

SEDIMENT TRAP FOR KERB INLET (ON GRADE - SANDBAG)
NOT TO SCALE

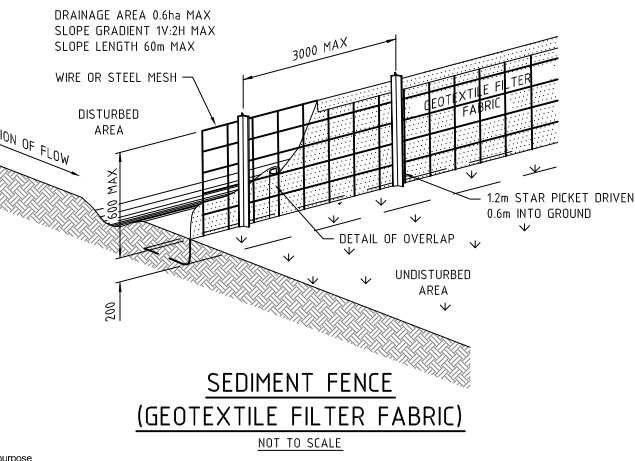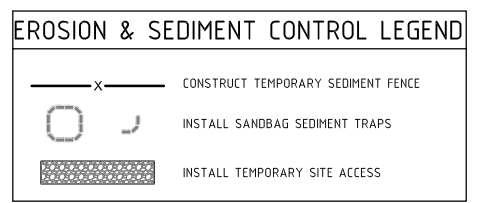

SEDIMENT FENCE (GEOTEXTILE FILTER FABRIC)
NOT TO SCALE

SOIL AND WATER MANAGEMENT NOTES

- SWM1 THIS IS A CONCEPTUAL SOIL AND WATER MANAGEMENT PLAN (SWMP) ONLY, AND SHOWS A POSSIBLE WAY OF MANAGING SOIL EROSION. THE CONTRACTOR SHALL PREPARE A DETAILED PLAN AND OBTAIN APPROVAL FROM THE RELEVANT AUTHORITY - PRIOR TO THE COMMENCEMENT OF ANY WORKS.
- SWM2 THIS PLAN IS TO BE READ IN CONJUNCTION WITH THE ENGINEERING PLANS, AND ANY OTHER PLANS, WRITTEN INSTRUCTIONS, SPECIFICATION OR DOCUMENTATION THAT MAY BE ISSUED AND RELATING TO DEVELOPMENT OF THE SUBJECT SITE.
- SWM3 THE CONTRACTOR WILL ENSURE THAT ALL SOIL AND WATER MANAGEMENT WORKS ARE CONSISTENT WITH 'MANAGING URBAN STORMWATER - SOILS AND CONSTRUCTION' - ALSO KNOWN AS 'THE BLUE BOOK'.
- SWM4 ALL BUILDERS AND SUB-CONTRACTORS SHALL BE INFORMED OF THEIR RESPONSIBILITIES IN MINIMISING THE POTENTIAL FOR SOIL EROSION AND POLLUTION TO DOWNSLOPE LANDS AND WATERWAYS.
- SWM5 WATER WILL BE PREVENTED FROM ENTERING THE PERMANENT DRAINAGE SYSTEM UNLESS IT IS RELATIVELY SEDIMENT FREE, IE THE CATCHMENT AREA HAS BEEN PERMANENTLY LANDSCAPED AND/OR ANY LIKELY SEDIMENT HAS BEEN FILTERED THROUGH AN APPROVED STRUCTURE.
- SWM6 "SEDIMENT" FENCING WILL BE INSTALLED AS INDICATED ON THE PLANS AND AT THE DIRECTION OF SITE SUPERINTENDENT TO ENSURE CONTAINMENT OF SEDIMENT. THE SEDIMENT FENCING WILL OUTLET OR OVERFLOW UNDER STABILISED CONDITIONS INTO THE SEDIMENT BASIN, TO SAFELY CONVEY WATER INTO A SUITABLE FILTERING SYSTEM SHOULD THE PORES IN THE FABRIC BLOCK.
- SWM7 UNDERTAKE SITE DEVELOPMENT WORKS IN ACCORDANCE WITH THE ENGINEERING PLANS, WHERE POSSIBLE, PHASE DEVELOPMENT SO THAT LAND DISTURBANCE IS CONFINED TO AREAS OF WORKABLE SIZE.
- SWM8 TEMPORARY SOIL AND WATER MANAGEMENT STRUCTURES WILL BE REMOVED ONLY AFTER THE LANDS THEY ARE PROTECTING ARE REHABILITATED.
- SWM9 FINAL SITE LANDSCAPING WILL BE UNDERTAKEN AS SOON AS POSSIBLE AND WITHIN 20 WORKING DAYS FROM COMPLETION OF CONSTRUCTION ACTIVITIES.
- SWM10 AT LEAST WEEKLY AND AFTER EVERY RAIN FALL EVENT, THE CONTRACTOR WILL INSPECT THE SITE AND ENSURE THAT - DRAINS OPERATE EFFECTIVELY AND INITIATE REPAIR OR MAINTENANCE AS REQUIRED, SPILLED SAND (OR OTHER MATERIALS) IS REMOVED FROM HAZARD AREAS, INCLUDING LIKELY AREAS OF CONCENTRATED OR HIGH VELOCITY FLOWS SUCH AS WATERWAYS, GUTTERS, PAVED AREAS AND DRIVEWAYS. SEDIMENT IS REMOVED FROM BASINS AND/OR TRAPS WHEN LESS THAN 20m³ OF TRAPPING CAPACITY REMAIN PER 1000m² OF DISTURBED LANDS, AND/OR LESS THAN 500mm DEPTH REMAINS IN THE SETTLING ZONE. ANY COLLECTED SEDIMENT WILL BE DISPOSED IN AREAS WHERE FURTHER POLLUTION TO DOWNSLOPE LANDS AND WATERWAYS IS UNLIKELY. REHABILITATED LANDS HAVE EFFECTIVELY REDUCED THE EROSION HAZARD AND INITIATE UPGRADING OR REPAIR AS APPROPRIATE.

Notes

Key to symbols

Reference drawings

Rev	Date	Drawn	Description	Ch'k'd	App'd
P1	14.11.12	MM	ISSUED FOR PROJECT APPLICATION	CB	XXXX



Title
CENTRAL PARK BLOCK 4S CONCEPT EROSION & SEDIMENT CONTROL PLAN

Designed	CB	Eng check	
Drawn	MM	Coordination	
Dwg check		Approved	
Scale at A1	1:250	Status	PRELIM
Drawing Number	MMD-286054-C-PA-CD-0005	Rev	P1