

- ### Sequence Of Works




1. Prior to commencement of excavation the following soil management devices must be installed.
- 1.1. Construct silt fences below the site and across all potential runoff sites.
- 1.2. Construct temporary construction entry/exit and divert runoff to suitable control systems.
- 1.3. Construct measures to divert upstream flows into existing stormwater system.
- 1.4. Construct sedimentation traps/basin including outlet control and overflow.
- 1.5. Construct turf lined swales.
- 1.6. Provide sandbag sediment traps upstream of existing pits.
2. Construct geotextile filter pit surround around all proposed pits as they are constructed.
3. On completion of pavement provide sand bag kerb inlet sediment traps around pits.
4. Provide and maintain a strip of turf on both sides of all roads after the construction of kerbs.

WATER QUALITY TESTING REQUIREMENTS




Prior to discharge of site stormwater, groundwater and seepage water into council's stormwater system, contractors must undertake water quality tests in conjunction with a suitably qualified environment consultant outlining the following:

- Compliance with the criteria of the Australian and New Zealand Guidelines for Fresh and Marine Water Quality (2000)
- If required subject to the environmental consultants advice, provide remedial measures to improve the quality of water that is to be discharged into Councils storm water drainage system. This should include commencing from a suitably qualified environmental consultant confirming the suitability of these remedial measures to manage the water discharged from the site into Councils storm water drainage system. Outlining the proposed, ongoing monitoring, contingency plans and validation program that will be in place to continually monitor the quality of water discharged from this site. This should outline the frequency of water quality testing that will be undertaken by a suitably qualified environmental consultant.

EROSION AND SEDIMENT CONTROL LEGEND

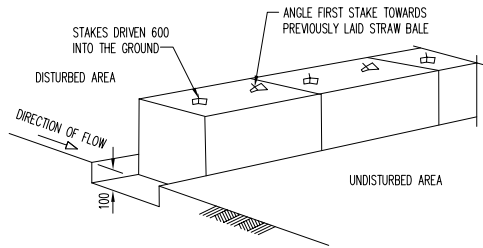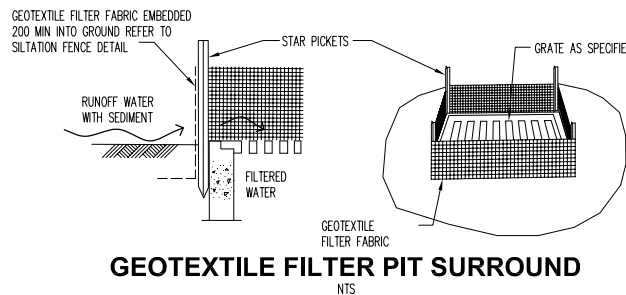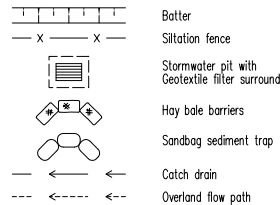

NOTE: STAKE TO BE EITHER TAR COATED
STAR OR 50 x 50 HARDWOOD

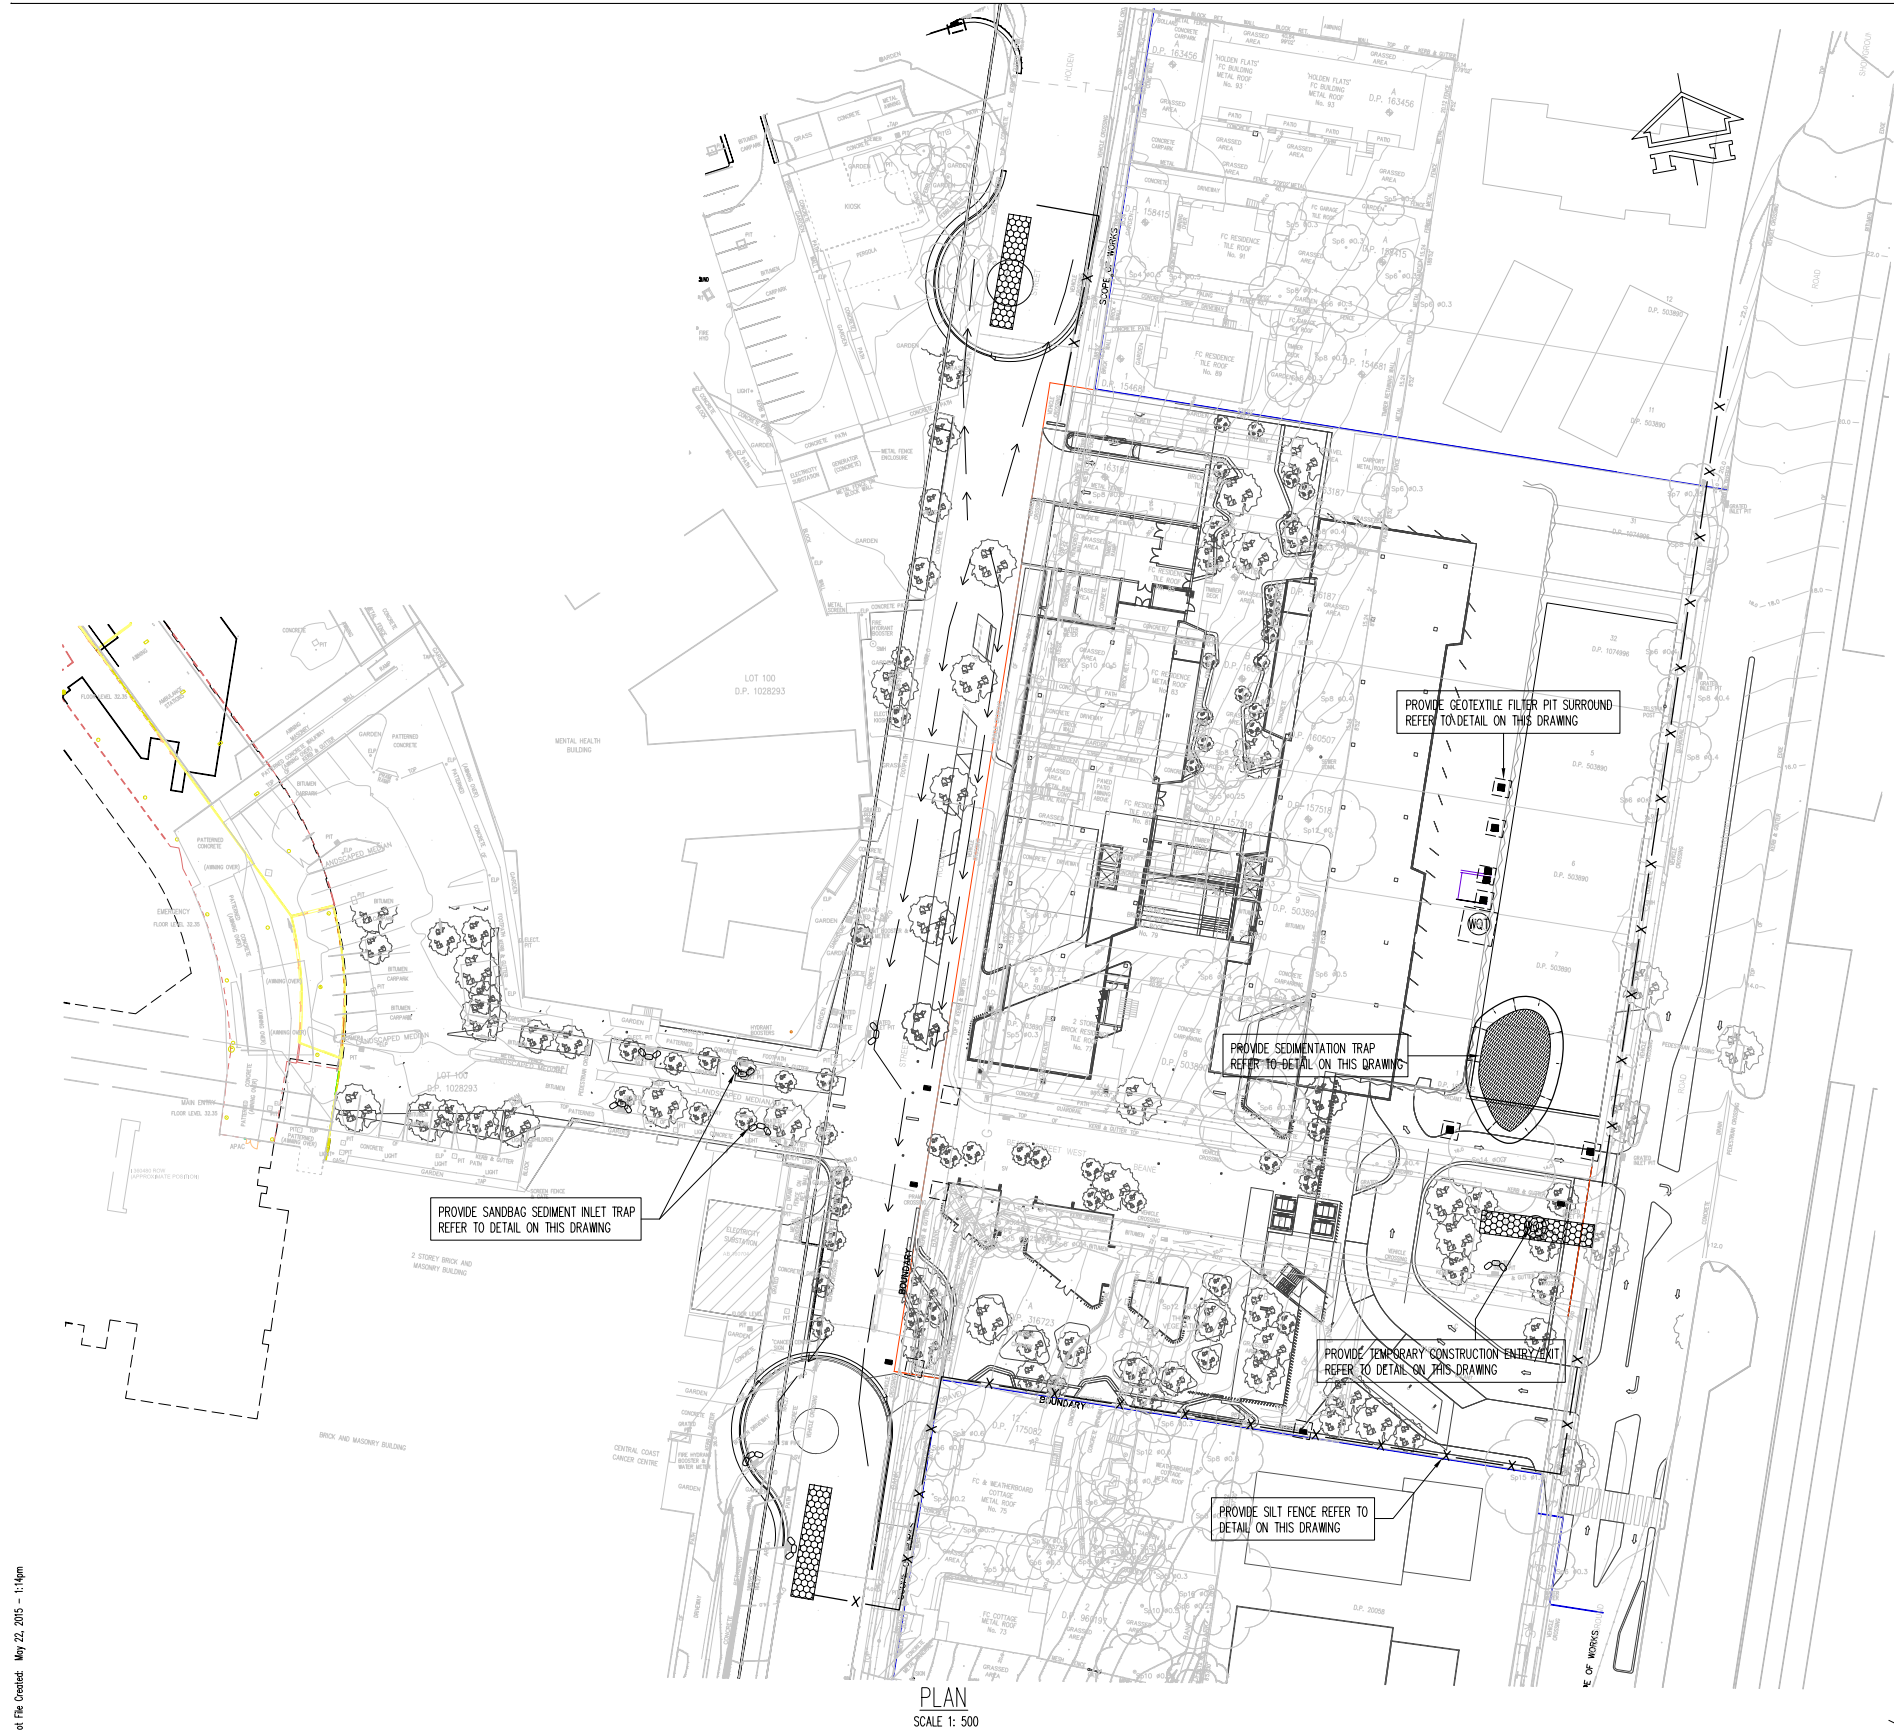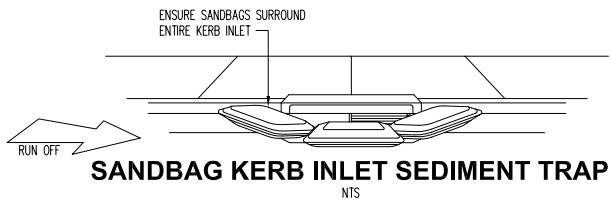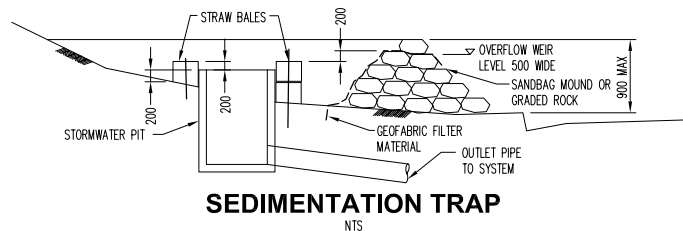

P2 FINAL SD					HS	JW	22.05.15										
P1 SSD ISSUE					HS	JW	06.03.15										
Rev	Description	Eng	Draft	Date	Rev	Description	Eng	Draft	Date	Rev	Description	Eng	Draft	Date			

Architect
FITZPATRICK + PARTNERS



TaylorThomsonWhitting
Consulting Engineers
48 Chandos Street St.Leonards NSW 2065
T: +61 2 9439 7288 F: +61 2 9439 3146 ttwsyd@ttw.com.au
Taylor Thomson Whitting (NSW) Pty Ltd A.C.N. 113 578 377

Project

HEALTH & WELLBEING PRECINCT - CIVIL SCHEMATIC DESIGN

Sheet Subject

**EROSION & SEDIMENT
CONTROL PLAN**

Scale : A1 Drawn Authorise

Job No	Drawing No	Revision
141191-HWBP-CV-DG-C1001		P2

Plot File Created: May 22, 2015 - 1:14pm

PRELIMINARY



Reference: 141191-HWBP-CV-DG-C3001.dwg - User: jerry - Plot File Created: May 22, 2015 - 1:16pm

A1 0 1 2 3 4 5 6 7 8 9 10

P4	FINAL SD	HS	JW	22.05.15					
P3	SSD ISSUE	HS	AS	09.04.15					
P2	SSD ISSUE	HS	JW	06.03.15					
P1	PRELIMINARY SSD ISSUE	HS	JW	23.01.15					
Rev	Description	Eng	Draft	Date	Rev	Description	Eng	Draft	Date

Architect
FITZPATRICK + PARTNERS

TaylorThomsonWhitting
Consulting Engineers
48 Chandos Street St Leonards NSW 2065
T: +61 2 9439 7288 F: +61 2 9439 3146 ttwydw@ttw.com.au
Taylor Thomson Whitting (NSW) Pty Ltd ACN 113 576 377

Project
**HEALTH & WELLBEING
PRECINCT -
CIVIL SCHEMATIC DESIGN**

Sheet Subject
**OVERALL SITEWORKS
PLAN**

Scale: A1
1:500
Drawn
WW
Authorised

Job No
141191-HWBP-CV-DG-C3001
Drawing No
Revision
P4
Plot File Created: May 22, 2015 - 1:16pm

PRELIMINARY