



# vegetation management plan

**the outlook stage 10**





date: 08.03.2018  
project no: 9496.5  
site Minmi Road, Fletcher  
council: City of Newcastle  
proposal: Residential Subdivision

## vegetation management plan

### the outlook stage 10

#### REFERENCED DRAWINGS

01 Site Plan  
02 Extent of Weeds  
03 Management Zones  
04 Suggested Plant Species & Details

REV NO	DESCRIPTION	DATE
E	DA	08.11.17
F	DA	08.03.2018
G	DA	04.04.2018

## Table of Contents

<b>1.</b>	<b>INTRODUCTION AND BACKGROUND.....</b>	<b>4</b>
1.1	SITE CHARACTERISTICS	5
1.2	PROPOSED DEVELOPMENT	5
1.3	OBJECTIVES	5
<b>2.</b>	<b>VEGETATION MANAGEMENT .....</b>	<b>6</b>
2.1	WEED REMOVAL	6
2.2	THE RETENTION OF EXISTING NATIVE VEGETATION	7
2.3	REVEGETATION	7
2.4	ACCESS	8
	<b>MANAGEMENT STRATEGIES.....</b>	<b>8</b>
2.5	THE RETENTION OF EXISTING NATIVE VEGETATION	8
2.6	TREE PROTECTION	9
2.7	WEED REMOVAL	10
2.8	INITIAL WEED REMOVAL	10
<b>3.</b>	<b>SCOPE OF WORKS.....</b>	<b>11</b>
3.1	SITE PREPARATION	11
3.2	SPECIES AND STOCK SELECTION	11
3.3	PLANTING TECHNIQUES	12
3.4	PLANT ESTABLISHMENT AND PROTECTION	12
3.5	ONGOING WEED CONTROL	12
3.6	ONGOING MONITORING, MAINTENANCE AND PLANT ESTABLISHMENT	13
3.7	CONTROL OF ACCESS	13
3.8	EROSION AND SEDIMENTATION CONTROL	14
<b>4.</b>	<b>MANAGEMENT ACTIVITIES .....</b>	<b>15</b>
4.1	GENERAL	15
4.2	REQUIRED VEGETATION MANAGEMENT ACTIVITIES	15
4.3	COMMISSIONING	16
4.4	LITTER AND REFUSE	16
4.5	OPERATION	16
4.6	FLOOD MANAGEMENT	16
4.7	PEST AND WEED CONTROL	17
4.8	WATERING	17
4.9	SEDIMENT ACCUMULATION	17
4.10	TIMING FOR MAINTENANCE ACTIVITIES	17
<b>5.</b>	<b>SITE SUPERVISION, MONITORING AND REPORTING .....</b>	<b>18</b>
5.1	SITE SUPERVISION	18
5.2	MONITORING, MAINTENANCE AND REPORTING	18
5.3	CHECKLISTS AND LOGS	20
5.4	VEGETATION MANAGEMENT TIMING	22
<b>6.</b>	<b>REFERENCES.....</b>	<b>24</b>
<b>7.</b>	<b>APPENDICES.....</b>	<b>25</b>
7.1	ACCEPTED WEED REMOVAL TECHNIQUES	25
7.2	MAINTENANCE SCHEDULES	27
7.3	DRAWINGS VMP-01	35



7.4	DRAWINGS VMP-02	36
7.5	DRAWINGS VMP-03	37
7.6	DRAWINGS VMP-04	38
7.7	SITE IMAGES	39



## 1. INTRODUCTION AND BACKGROUND

This Vegetation Management Plan (VMP) has been prepared by Terras Landscape Architects to provide details on the management of existing and proposed vegetation associated with the gully lines and existing mature trees within the proposed development footprint, with particular emphasis applied to the Stage 10 component of The Outlook subdivision.

The plan shall also consider the requirements noted in the Bushfire Protection Assessment (APBB, 2006) and Planning for Bushfire Protection (NSW RFS, 2006) regarding revegetation and maintenance within the Asset Protection Zone (APZ) and Fuel Management Zone (FMZ).

The subject site is located on Minmi Road, Fletcher and extends north toward Hexham Swamp. This VMP is an update to the VMP prepared by Moir Landscape Architecture (2006) as requested by Newcastle City Council due to the modification of Stage 10 of the Outlook Subdivision.

This VMP provides the detail for vegetation management with regards to the issues outlined below:

- Extent of existing vegetation to be retained and protected.
- Existing vegetation affected by the development.
- Undesirable plant species and removal techniques to be employed to enhance existing vegetation remnants.
- Native plant species proposed to be used for revegetation and landscape works.
- Details of the proposed revegetation work.
- Vegetation maintenance, establishment, monitoring and reporting.
- Create and maintain an appropriate fuel management zone.

### Vegetation Management Plans

A VMP is a site-specific document that provides guidelines for the management and rehabilitation of native vegetation communities within that site while taking into consideration vegetation communities adjoining the site, whether or not they are threatened communities. The document describes the strategic and management objectives of the plan and the existing condition of the site with respect to the natural resources available. It details the management guidelines in relation to a list of issues applicable to the land, e.g. biodiversity conservation, vegetation and weeds, fauna, bushfire fuel management, streams and stormwater management, recreation, works and infrastructure, pollution control and education and community involvement.

A schedule of works details the implementation of the plan, the duration and priority. The plan is supported by maps, diagrams and plant species lists to describe the existing vegetation, management zones, constraints (including fuel management zones), vegetation and natural features to be retained, proposed vegetation, minor sediment and erosion control and stabilisation works to be undertaken, etc.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



## 1.1 SITE CHARACTERISTICS

### Terminology:

"Development Site" refers to the entire subdivision.

"The Site" refers to the Stage 10 the proposed subdivision.

The site has frontage to Minmi Road, Fletcher and extends north to the southern edge of Hexham Swamp. The site has previously been used for grazing.

A residential subdivision is located to the south across Minmi Road of Stage 10 with the exception of a small area of bushland interface on the extreme western edge of Stage 10.

To the west of Stage 10 are previously constructed stages of The Outlook subdivision.

To the east is a pocket of bushland and the Sanctuary subdivision.

The majority of the sites vegetation consists of pasture with scattered trees. The gully lines still retain remnant vegetation although heavily infested with Lantana.

Vegetation communities identified in the Flora and Fauna Assessment by Environmental Appraisal and Planning Pty Ltd (2003)

- Tall Dry Sclerophyll Forest. (Now a woodland)
- Dry Rainforest – within gully lines
- Tall Wet Sclerophyll Forest – within gully lines

No threatened flora species were identified on site.

## 1.2 PROPOSED DEVELOPMENT

The proposed development (stage 10) comprises of a 112 residential + 2 super lot subdivisions and 2 lots proposed as open space/park. A number of stages further to the west of stage 10 have been constructed.

It is proposed that the revegetation works be divided into 4 vegetation zones reflective of existing native vegetation as well as the level of weed inundation and future maintenance regime:

- Zone 1: Core Riparian Zone (CRZ).
- Zone 2: Fuel Managed Zone (FMZ).
- Zone 3: Slashed Pasture (SP).
- Zone 4: Asset Protection Zone (APZ).

## 1.3 OBJECTIVES

### Core Riparian Zone (CRZ):

- to control water quality and flow as well as minimise the spread of weeds from site;
- to maintain creek lines with appropriate plant species as specified on the attached plans (9496.5 VMP-01-04) Prepared by Terras Landscape Architects, and
- to ensure creek lines continue to function in accordance with the design.

### Bushfire Fuel Management Zones (APZ, FMZ, SP):

- Retain as much native vegetation as possible, whilst complying with the NSW Rural Fire Service (RFS) requirements and recommendations noted in the Bushfire Protection Assessment.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au

- Reduce bushfire fuel loading within the APZ to achieve Inner Protection Area (IPA) levels. This includes a maximum tree canopy density of 15% and understorey fine fuel loading of 3 tonnes per hectare. Canopy trees may be retained in small clusters and as isolated specimens, providing the overall canopy is discontinuous. A 10 metre head separation is recommended to minimise the likelihood of fire transferring from one vegetated area to another. Understorey shall be slashed. Some shrubs are permitted within the understorey provided they do not form a continuous canopy, retain dead material, or provide a connection between the ground plane and canopy layer.
- Reduce bushfire fuel loading within the FMZ and SP to achieve Outer Protection Area (OPA) levels. This includes a maximum tree canopy density of 30% and understorey fine fuel loading of 5 tonnes per hectare. Canopy trees may be retained in small clusters and as isolated specimens. Occasional supplementary canopy trees are to be planted within the SP zone, however the canopy density shall not exceed 30% at tree maturity. Understorey shall consist of a combination of shrub clusters and slashed pasture grass. Shrubs shall not form a continuous canopy, retain dead material, or provide a connection between the ground plane and canopy layer.
- Maintain the fuel managed zones to achieve the above requirements in perpetuity.

## 2. VEGETATION MANAGEMENT

The proposed vegetation management includes:

- Retention of existing native vegetation;
- Weed removal, suppression and ongoing control;
- Maintaining creek bank stability and minimising erosion potential;
- Planting of native vegetation including trees, shrubs and grasses both within the CRZ and in areas channelling water into this area, whilst meeting the bushfire hazard reduction objectives. Correct planting and establishment methods are to be used to ensure survival rates meet the outcomes noted in this VMP;
- Limiting the transportation of weed seeds into the CRZ, and
- Monitoring and maintenance of vegetation, weeds and over planting.
- Monitoring the potential for sapling re-establishment and maintaining the tree canopy to the recommended density.
- Monitoring and maintaining ground fuel loading to the recommended levels.

### 2.1 WEED REMOVAL

Table 1: Main Weed Species Identified On-Site to be Removed.

SCIENTIFIC NAME	COMMON NAME	NOXIOUS WEED CLASS
<i>Lantana camara</i>	Lantana	4 / WONS
<i>Ligustrum sinense</i>	Small-leaf Privet	
<i>Rubus fruticosus</i>	Blackberry	4 / WONS
<i>Senecio madagascariensis</i>	Fireweed	WONS
<p><b>Class 4:</b>  <u>Defined under the Noxious Weeds Act 1993 as:</u>  Plants that pose a potentially serious threat to primary production, the environment or human health, are widely distributed in an area to which the order applies and are likely to spread in the area or to another area.</p> <p><b>WONS / Weeds of National Significance:</b>  <u>Defined under the Noxious Weeds Act 1993 as:</u></p>		

These weeds are regarded as the worst weeds in Australia because of their invasiveness, potential for spread, and economic and environmental impacts.

**Note:** *Lantana camara* is not declared within the Newcastle LGA.

The main weed species have been identified as occurring within the site outlined in Table 1. The removal and monitoring of these species is essential to enable the long term viability of the proposed vegetation and prevention of further infestation. Follow-up weed control will be required over the maintenance period to ensure the eradication of weed species and will occur at regular intervals as specified. Section 7.1 describes accepted weed removal techniques in further detail for specific species and type of weeds.

## 2.2 THE RETENTION OF EXISTING NATIVE VEGETATION

As existing vegetation is almost always affected adversely by most types of development, it is highly desirable that the remaining remnant vegetation on the site is identified and protected. This will require the early identification and control of any potential factors that may cause damage to existing vegetation communities on site. Awareness of all significant remnant vegetation areas is crucial to ensure protection measures are carried throughout to coincide the various stages of construction.

Correct protection, initial weed removal and maintenance procedures are central to the successful retention of the vegetation located within the Development Site's boundaries, in particular areas adjacent to civil construction works.

Individual trees, groups of trees or vegetation remnants to be retained are exposed to many direct and/or indirect threats as a result of development. These threats can have adverse effects on both the health and long-term viability of any vegetation that is to be retained within the Development Site. These may include:

- damage to retained trees or other vegetation by machinery and engineering processes during the course of construction;
- alterations to site hydrology and previous drainage patterns;
- damage to roots and root zones due to excavation required for benched sites, roads, trenches etc.;
- compaction of soil by heavy machinery within close proximity of mature trees
- erosion and sedimentation caused by clearing for development;
- exposure of retained trees to wind loading following the removal of neighbouring trees and other vegetation previously providing shelter, and
- damage from future land management and activities, impacts due to residents, weed infestation and bushfire management.

## 2.3 REVEGETATION

The proposed revegetation and bushland management shall be undertaken in association with the development of the estate. Revegetation is to take place primarily within the core riparian zone (CRZ), incorporating tree and shrub planting to be undertaken in accordance with City of Newcastle's DCP, 2015. No revegetation is to take place within the dripline of existing trees to ensure minimal damage to established root systems.





Additional tree planting shall be undertaken within and outside of the CRZ to compensate for trees removed during construction of the subdivision. Supplementary tree planting within the APZ, FMZ and SP occur as individual specimens or small clusters and not form a continuous canopy. The APZ shall have a maximum canopy cover of 15% at maturity and the FMZ and SP maximum canopy cover of 30%.

Understorey revegetation using competitive native species that will maintain sufficient ground cover will assist in preventing the return and establishment of problem weed species. Native species planted in suitable locations as listed on Sheet 04 will create competition to undesirable weed species. A cover of fast-growing native species shall be established and maintained as per the RFS requirements in perpetuity. Native ground covers and grasses shall predominate the understorey planting within the APZ however the ground fuel loading shall not exceed 3 tonnes per hectare at any time (ie: approximately 30% shrubs). Understorey planting within the FMZ and SP zones shall not exceed 5 tonnes per hectare. Occasional shrub planting is permissible within these zones provided that they are spread out, form a discontinuous canopy and minimal connection between the ground plane and canopy layer.

It is essential that weed control occurs throughout native plant establishment. Having revegetation coinciding with certain seasons will also ensure a competitive advantage over weed species can be achieved.

## 24 ACCESS

Access to management areas and storage of materials on site during the development and construction phases requires appropriate planning to ensure protection of native remnant vegetation throughout the duration of construction works.

Access to the revegetation area during construction will be restricted as part of the site management plan. Under these operations, access issues include preventing the unnecessary movement of people and equipment through vulnerable/protected areas of the site. Suitable protective fencing shall be erected by the civil contractor as discussed further in this report where required to prevent access. The briefing of contractors shall be undertaken to ensure protection of all required areas as identified in this report.

## MANAGEMENT STRATEGIES

### 2.5 THE RETENTION OF EXISTING NATIVE VEGETATION

The protection and enhancement of the existing native and indigenous vegetation will be undertaken using a variety of management strategies. These will include:

- Identification of existing native vegetation to be retained.
- Implementation of vegetation protection guidelines where required (civil contractor, fencing contractor) .
- Weed control
- Revegetation.
- Ongoing site maintenance, monitoring and reporting.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au



All weed removal and site preparation is to be undertaken by a qualified and experienced bush regenerator. The successful contractor will be required to provide proof of qualifications and details of experience to the client's agent.

Prior to any works being undertaken on site the head contractor shall fence and protect any trees and native vegetation remnants to be retained in locations where adjoining civil works are to occur. Tree and vegetation protection shall be coordinated during construction. (Refer to drawings 9496.5-VMP-01-04, Terras Landscape Architects).

To ensure ongoing protection of retained vegetation, protection measures are to remain in place throughout the relevant development and construction phases as required. Protection measures such as these prevent the accidental disturbance or removal of desired native vegetation from the site during construction.

As all trees within the CRZ are to be retained, the following guidelines shall be followed for any trees that are located within potential construction areas:

## 2.6 TREE PROTECTION

- Earthworks around subject trees are to be undertaken in the presence of a qualified arborist or ecologist who may provide additional on-site advice.
- Machine digging within the root mass of the subject tree be minimised and where possible hand digging be undertaken.
- Any exposed roots of the subject tree should be wrapped and protected during exposure and be replaced in a similar position prior to disturbance.
- Inspection of retained trees by a qualified person should be conducted at 6 and 12 month intervals after the completion of development works.

Existing vegetation will require removal where conflict exists with the construction of the subdivision, associated engineered batters and bushfire hazard reduction, with protection provided to trees in close proximity to but not affected by construction. The Civil Contractor shall fence off trees/vegetation to be retained and protected where required prior to any construction work being undertaken. Refer to drawings 9496.5-VMP-01-04 Prepared by Terras Landscape Architects.

Protective fencing offsets shall be determined using AS 4970-2009 Protection of Trees on Development Sites. Generally fencing shall be offset the radial distance from the trunk calculated at 12 x the trunk diameter when measured at 1.4m high.

There shall be no stockpiling of materials or machinery entering identified vegetation protection zones.

Approved tree removal operations in the vicinity of retained trees are to be undertaken in a manner that avoids canopy damage, root damage to retained vegetation and soil compaction.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au



## 2.7 WEED REMOVAL

Effective weed removal and control is necessary to both protect and preserve existing vegetation and to allow long-term establishment of proposed native vegetation to be planted on site.

Weed control shall include:

- the use of herbicides;
- mechanical removal and clearing;
- weed matting and mulching; and,
- increasing the density of surrounding native vegetation.

All weed control will be carried out using minimal disturbance techniques. Details of weed control techniques to be used are provided in Section 7.1. The use of these best management practice techniques will aim to maintain and enhance the integrity of the existing native indigenous vegetation.

## 2.8 INITIAL WEED REMOVAL

While all weeds as identified in Table 2 shall be removed throughout the site, the primary focus shall be the removal of Lantana and Blackberry to its listing on the City of Newcastle's Noxious Weed List for their potential to spread through the landscape.

An integrated weed management approach utilising a variety of control methods is desirable to eradicate most weed species. The below mentioned techniques have been selected for application in this situation due to suitability to this site. The below mentioned points shall be taken into consideration by the bush regeneration contractor at all times when undertaking weed removal:

- Weed removal and associated techniques are undertaken at the correct times of the year to ensure optimum results are achieved. Correct timing reduces cost and effort in the long term and improves eradication results dramatically. Where this cannot be done, additional visits may be required to remove regrowth.
- The revegetation team shall take all due care to minimise disturbance to existing desirable vegetation and surrounding land.
- Mulch shall be placed to all disturbed areas of ground due to weed removal. This will aid in preventing re-colonisation of weed species throughout disturbed areas. Steep eroded areas may require regrading & jute mesh/erosion control matting to be pinned down and placed over mulch to prevent soil runoff.
- The contractor shall keep records of all herbicide applications and use only registered and accepted herbicides.
- Appropriate herbicide training shall be undertaken ensuring all safety precautions are adhered to at all times.
- The contractor shall ensure any spray drift is kept to an absolute minimum.
- Herbicide control shall be undertaken when weeds are actively growing.
- The contractor shall take all care not to poison existing desirable vegetation when undertaking herbicide control methods.
- If required, the contractor shall be required to make good in areas where spray drift and/or wrong applications have resulted in the loss of desirable vegetation.
- The correct herbicide shall be selected and used appropriately to ensure effective

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au



results on all weeds.

- Do not undertake herbicide control when weed species are under stress, e.g. periods of extreme hot or cold weather.
- All herbicide spraying is to be undertaken using only the knap-sack spray apparatus. All other methods of herbicide application are not to be used onsite unless discussed and approved in writing by the client's agent.
- Herbicide control is not to be used within or near watercourses unless approved. The contractor shall obtain all required permits prior to use of suitable herbicides near any watercourse.
- Weed removal shall be carried out as described below and utilising weed removal techniques outlined in section 8.2 of this report.
- Should the contractor feel that techniques selected in this report will prove ineffective or inefficient; the contractor shall notify the client's agent nominating alternative procedures for review and discussion. Approved changes shall be issued in writing by the client's agent to the contractor.

### **3. SCOPE OF WORKS**

#### **3.1 SITE PREPARATION**

Site preparation shall include the installation of temporary protective fencing (if not already present) and the removal and control of all problem weeds identified on-site. The bushland revegetation contractor shall visit the site and make themselves familiar with the extent of works.

Revegetation using applicable native species, as suggested on the attached drawings prepared by Terras Landscape Architects (9496.5-VMP-01-04) is required as soon as possible or after weed infestations are removed. The use of competitive native species that will maintain sufficient ground cover will assist in preventing the return and establishment of problem weed species seedlings. Native species located in suitable positions as selected and listed on the drawings will create shade and competition with the aim of out-competing undesirable weed species. It is essential that weed control occurs throughout native seedling establishment and subsequent management period.

#### **3.2 SPECIES AND STOCK SELECTION**

A list of native, indigenous vegetation selected for revegetation at this site is provided on the attached drawings prepared by Terras Landscape Architects (9496.5-VMP-01-04). It is preferred that plant material is sourced from local provenance seed and propagated for future revegetation. This is determined by the need to preserve biodiversity and ensure that the new plants are genetically similar to those that are growing in the surrounding area and therefore may have been previously growing on site. If using provenance plants, allow sufficient lead time for seed sourcing, collection and growing on to the nominated size and propagate the necessary quantities to allow for plant losses. Propagation is to be undertaken by a suitably qualified bush regenerator and all plant material shall be to Australian Standard quality.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



The use of local provenance plant material may not be possible throughout the initial stages of revegetation, so it is recommended that seed be sourced from a similar vegetation community, soil type and altitude to that which preceded clearing. In the absence of more local material, seed may be sourced from the broader catchment region (10 – 100km).

Seed collection must be sourced from a variety of host plants as variations within populations of the same species are common.

If new plant material is nursery purchased and not propagated by the bush regeneration contractor, then certification of provenance is preferred.

All planting shall generally be undertaken utilising tube-stock (i.e. forestry tubes or equivalent with appropriately developed root systems capable of sustaining above ground vegetative material).

### **3.3 PLANTING TECHNIQUES**

Prior to any revegetation planting, all initial weed removal and engineering activity such as erosion stabilisation must be undertaken and completed. Planting is to be undertaken by suitably qualified staff and shall commence as soon as practicable and where applicable upon completion of initial weed removal.

Planting is to be undertaken by suitably qualified staff as per the planting detail provided on the VMP drawings. Nominated plants are listed in the Plant Schedule on the VMP drawings.

Jute mat, coir logs, or other appropriate biodegradable as erosion control measures shall be installed as required to disturbed areas with high potential for soil erosion. Forest blend mulch shall be used elsewhere, however the depth shall not exceed 15mm beyond the CRZ. Refer drawing 9496.5-VMP-01-04 associated with this report for additional detail.

### **3.4 PLANT ESTABLISHMENT AND PROTECTION**

Initial protection of all individual tree and shrub plantings shall be undertaken using protective biodegradable tree sleeves held with bamboo stakes. Locations shall be mulched with bark or a weed mat product to provide the best opportunity for plant establishment.

### **3.5 ONGOING WEED CONTROL**

Ongoing monitoring, maintenance and weed control shall be undertaken in accordance with this plan and as required to further reduce and eradicate weed populations throughout the site. All areas found to have weed infestation shall be monitored and treated thoroughly for a minimum of 2 years and until such time as a maximum of 5% weed cover is achieved. Newly exposed or disturbed areas (due to initial weed removal or construction works) will be subject to new weed growth and may require intensive and continued weed removal, monitoring and maintenance throughout this period. Replenishment of mulch to the maximum depths noted above may be required to

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au



further reduce the possibility of weed re-infestation.

The contractor shall undertake weed removal as required on a regular basis in order to maintain a weed free environment and reduce the potential for ground fuel loading to accumulate.

### **3.6 ONGOING MONITORING, MAINTENANCE AND PLANT ESTABLISHMENT**

Ongoing monitoring and plant establishment is important to establish and retain high quality, successful vegetation cover and minimise weed re-colonisation. The contract shall include a plant establishment period of 12 months and a management period of another year and until such time as 80% survival rate of each species is achieved. During this period the plants shall be checked for pests and disease, fauna damage and general health and vigour. Plants found to be dead or dying shall be progressively replaced under general maintenance.

Where plants are failing they shall be replaced with suitable substitutes as recommended by a registered landscape architect, ecologist or bush regenerator. Where erosion occurs, re-stabilise using mulch, followed by replanting to minimise long term maintenance issues. Weeding shall occur as outlined in previous sections. Steep eroded areas may require jute mesh/erosion control matting to be pinned down and placed over mulch to prevent soil runoff.

Maintenance activities shall include weeding, spot spraying, watering, monitoring of plant losses from heat or other factors, poor growth, animal, construction damage, and unsuitable species.

Additionally, regular maintenance activities within the APZ, FMZ and SP zones shall be undertaken so as to manage the ground fuel loading for bushfire hazard reduction. Such activities shall be undertaken in perpetuity and include:

- Keep the areas clean and remove litter, leaves and fallen dry branches.
- Remove dead annual weeds before they begin to dry out.
- Remove dead grasses and shrubs or those which are constantly damaged, which may contribute to high fuel loads.
- Keep pasture grass slashed to no greater than 10cm height.
- Underprune trees as they establish to create a discontinuous connection between the ground plane and tree canopy.

### **3.7 CONTROL OF ACCESS**

All areas under going planting shall be fenced/marked off to ensure that machinery, stockpiling of materials, access tracks, service layouts and general construction activity is prevented from accessing these areas. Protective fencing shall remain erected until construction works are complete for that particular stage.

It is often difficult to enforce this over large sites with numerous parties working on the site, however with the proper fencing, site supervision and site meetings/induction will ensure the best method to ensure the protection of these areas. The use of the Gro-tube protective sleeving will ensure visibility of revegetation areas generally. Gro-tubes

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au



also provide a secure micro-climate for new plantings to establish well in.

### 3.8 EROSION AND SEDIMENTATION CONTROL

Many factors that occur on site throughout construction phases have the potential to contribute to erosion and unnecessary damage to both the site itself and adjoining land. Factors that may cause adverse effects can include; storage of fill, removal of selected trees and surrounding grass cover in open areas and to a lesser extent, weed control and revegetation of remnant patches. It is important to understand the adverse effects caused due to erosion and sedimentation. In some cases areas some distance from the initial disturbance may be affected by actions else where on site.

Soil stabilisation works will be implemented as per the *Managing Urban Stormwater: Soils and Construction* commonly known as *The Blue Book* (Landcom, 2006) and local council requirements. It is a standard requirement for construction activity to provide sediment control where required.

Erosion zones shall be planted with suitable fast-growing native grass species immediately to reduce the potential for any further erosion or weed infestation to occur. Establishment and maintenance of cover is essential to ensure erosion areas do not amplify in size. Embankments steeper than 1:3 gradient may require jute mesh erosion control matting to be pinned down and placed over a mulch layer to prevent soil runoff.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)

## 4. MANAGEMENT ACTIVITIES

### 4.1 GENERAL

The time allocated to maintenance shall be varied according to the stage of the development. Initial establishment of the areas adjacent to the regraded embankments shall be given additional time to ensure the proper establishment and function of the system.

The Landscape Maintenance Schedule includes but is not limited to the prescribed instructions. The contractor shall perform additional tasks should they be required.

### 4.2 REQUIRED VEGETATION MANAGEMENT ACTIVITIES

Construction of the proposed stormwater control devices will be undertaken in various stages. Vegetation management including the activities outlined below are to coincide with the main civil construction stage.

TASK		DESCRIPTION	ACTIVITY
01	Protection of native vegetation where required	Areas to be fenced and protected, where required.	Civil Contractor, Bush Regeneration Team Site Supervisor.
02	Collect native indigenous seed from site and propagate stock to provide tube-stock for revegetation of the remnants and other areas undergoing rehabilitation.	Source and collect seed for propagation	Bush Regeneration Team  (Seed collection and propagation may not be possible depending on germination periods and construction schedules)
03	Weed removal	Weed removal by bush regeneration methods or manual spraying with approved herbicides.	Bush Regeneration Team
04	Erosion control.	Erosion control undertaken where required, monitor and maintain  Planting of suitable fast growing native species undertaken  Pin jute matting on embankments greater than 1:3 gradient to stabilise batters	Civil contractor , Bush Regeneration Team, Site supervisor
05	Initial bushfire hazard reduction activities	Removal of excessive canopy trees within the APZ and FMZ, reduction of understorey fuel loading to achieve the objectives listed for each zone.	Project Ecologist, Bushfire Mitigation Consultant and Site Supervisor supervising a Bush Regeneration Team.
06	Revegetation of disturbed areas	Soil stabilisation and revegetation undertaken.	Project Ecologist supervising a Bush Regeneration Team.



07	Ongoing site monitoring, maintenance (including sediment control fencing decommissioning, weed control, plant watering, plant replacement and protection)	Soil stabilisation, weed control, native vegetation establishment and ongoing bushfire hazard reduction activities.	Bush Regeneration contractor. Landscape Architect contractor-site supervisor.
08	Ongoing monitoring and maintenance of bushfire fuel loads	Bushfire hazard reduction activities	Bushfire Consultant and Site Supervisor supervising a Bush Regeneration Team.
09	Reporting	Follow up reports including images to ensure the processes and activities have been completed with recommendations for additional works	Bush Regeneration contractor.

#### 4.3 COMMISSIONING

- Inspect the revegetation area as required.
- Monitor and ensure the proper function of the stormwater control devices during the initial establishment of the planting works.
- Monitor and repair any erosion and replace all lost plantings as required.
- Remove any rubbish within the site throughout the maintenance period.

#### 4.4 LITTER AND REFUSE

- Ensure the litter trap for the collection of gross pollutants is maintained in a functional condition at all times.
- Removal of accumulated litter from the area is required. Discard all litter and other refuse material. All trash, litter, leaves, etc. shall be collected and deposited off site to approved waste areas or as otherwise directed by the superintendent.

#### 4.5 OPERATION

- Provide routine monitoring and maintenance activities as outlined and specified in this maintenance plan.
- Do not let any plants above the permanent water level dry out. Water when required as specified.

#### 4.6 FLOOD MANAGEMENT

- Inspect the site after storm events and ensure that any damages to new works is repaired / replaced.
- Remove litter and waste after storm events and dispose off site in an environmentally responsible manner.
- Replace any lost or missing plants whilst causing minimal disturbance to existing planted areas.

principals:  
 phillip williams  
 steve rushworth  
 ABN:  
 67 129 348 842  
 phone:  
 +61 2 4929 4926  
 Fax:  
 +61 2 4926 3069  
 address:  
 412 king st, newcastle,  
 nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



#### **4.7 PEST AND WEED CONTROL**

- Undertake adequate weed control measures on any non-desirable plants or weeds as required. Hand removal is required for weeds situated in close proximity to the water level whilst approved glyphosate can be used on weed species situated on elevated areas.
- Check that the vegetation is not adversely affected by wildlife (predation).
- Regularly remove, by hand, rubbish and weed growth that may occur throughout the VMP area and dispose of in a suitable manner.
- The contractor must keep records of each chemical application. Details are to include location, target identification, operators name, treatment date and time, risk assessment including prevailing conditions and product and equipment used and application rates.

#### **4.8 WATERING**

It is the contractor's responsibility to ensure that all plants receive adequate water regardless of weather conditions. Planted areas situated above the permanent water line are to be kept moist at all times throughout the establishment period. The maintenance contractor shall ensure all macrophyte planting receives adequate water for successful establishment when required.

#### **4.9 SEDIMENT ACCUMULATION**

- Ensure any excess sedimentation accumulated on site is removed.
- Sediment shall be disposed of in accordance with the '*Waste Minimisation and Management Act* 1995. And with the approval of Council.

#### **4.10 TIMING FOR MAINTENANCE ACTIVITIES**

Refer to the Maintenance Schedule (Section 7.2) for the timing of recurrent maintenance activities. It should be noted that this schedule is not comprehensive and additional items noted in the body of this report must be undertaken as part of the maintenance works.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



## **5. SITE SUPERVISION, MONITORING AND REPORTING**

### **5.1 SITE SUPERVISION**

- A copy of the bush regeneration contractor's works specification is to be submitted to Council. An initial site inspection is to be undertaken in the company of an appointed Council representative prior to undertaking and work identified in this VMP, if requested.
- The bush regeneration contractor shall be responsible for over-seeing the appropriate methodology, location, maintenance, monitoring and reporting of all rehabilitation works. Submissions and reporting shall be undertaken and provided as outlined in Section 5.2 below.
- An engineer shall be responsible for the supervision of any erosion or sediment control works undertaken, if applicable. This person shall ensure all environmental guidelines are adhered to during all operations.
- Any excavation works and/or fill placement are to be undertaken by an experienced excavator contractor, proficient in the use of the machinery and with an ability to carry out minimal disturbance to the surrounding vegetation.
- All weed control, revegetation and maintenance works will be undertaken by an experienced and certified bush regeneration contractor.
- The contractor shall report to the client's agent for any clarifications or issues encountered throughout the program.

### **5.2 MONITORING, MAINTENANCE AND REPORTING**

Monitoring, maintenance and reporting shall be undertaken on a regular basis to ensure the successful establishment of all plantings, monitoring of weed regrowth and stabilisation success. Regular monitoring shall be undertaken by the contractor for a minimum of 2 years and until such time as 80% survival rate of each native species and a maximum of 5% weed cover is achieved. Monitoring sessions shall also address the performance criteria as outlined below. The sessions will need to be more frequent in the early stages following primary weeding and planting, with the frequency decreasing over time.

- The contractor shall submit annual reports detailing works undertaken, the results of that work, identifying future works programs and making and necessary recommendations to enhance the VMP, if requested.

The frequency and duration of monitoring should be flexible, and re-assessed following each session. However, as an initial guide, monitoring is likely to be required:

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



- Every 4 weeks for the first 52 weeks,
- Every 8 weeks thereafter including one at completion,
- Subsequent years for bushfire hazard reduction. Frequency to be discussed with superintendent.

If it is necessary to increase or decrease monitoring at any given time the contractor shall discuss options with the site supervisor or landscape architect.

Monitoring sessions would indicate the specific maintenance requirements for the site. Such maintenance is likely to involve (but not necessarily be restricted to):

- Control of weeds,
- Watering as required,
- Control of pests or diseases,
- Correction of any significant nutrient deficiencies,
- Replacement of failed plantings,
- Correction of any bank/slope instability or erosion problems
- Bushfire hazard reduction, and
- Any other unanticipated problems.

Biannual reports are to be prepared by the contractor to record the results and actions identified throughout each monitoring and maintenance session. Reports shall be submitted to the client's agent. Reports are to be inclusive of but not be limited to; up to date photographs of areas treated, current progress or issues encountered, providing viable options for the remedy of any such issues, an outline of future maintenance and monitoring activities, any recommended amendments to the proposed program and reason for proposed amendments.

Photo points are one of the easiest ways of monitoring.

### Photo Points

Select appropriate reference points on site, taking into consideration future access as the vegetation changes / establishes. The VMP drawing L04 indicates the preferred location for the minimum number of photo points, but more may be selected or location adjusted if considered more suitable. Photo points should be permanent for consistency of recording and marked with a firm stake. Consider future access to each photo point site (due to changes in vegetation). Nominate a reference number for each photo point site (eg: PP1, PP2).

Use a small blackboard to create a sign including the following details:

- Project Number;

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au



- First initial and surname of photographer;
- Photo point reference number;
- Date.

Set the sign up 5 metres from the camera location, without obstructing critical vegetation information and ensure subsequent photos are consistent in form to facilitate ease of comparison.

Take photos at similar times of the day, with the sun behind or overhead the camera, if possible and ensure there is sufficient lighting to accurately record as much detail as possible.

### **Record Keeping**

Record all site assessments, risk assessments, chemical usage and other relevant WH&S requirements. The contractor shall keep records of each chemical application, including details such as location, target identification, operators name, treatment date and time, risk assessment (including prevailing conditions, product and equipment used and application rates).

Maintain a log book of initial and maintenance tasks for the duration of the project and submit to the superintendent within 24 hours of being requested to do so. The log book is to include as a minimum:

- Date;
- Time;
- Weather (since last entry);
- Rainfall (since last entry);
- Tasks undertaken;
- Observations and comments;
- Number of hours;
- Number and level of staff;
- Total hours.

The contractor shall submit annual reports to Council's Development Planner Flora and Fauna verifying compliance with the VMP. Reports are to be inclusive of but not be limited to; up to date photographs of areas treated, current progress or issues encountered, providing viable options for the remedy of any such issues, an outline of future works programs and monitoring activities, any recommended amendments to the proposed program and reason for proposed amendments, including any necessary recommendations to enhance the VMP, if requested.

### **5.3 CHECKLISTS AND LOGS**

A landscape management schedule is made part of this VMP. The contractor shall review this schedule as required and complete all applicable items on the list in intervals as specified.

The contractor shall keep a log of all maintenance undertaken on site. Details included within the log shall include date, time, work undertaken and any relevant

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
www.terras.com.au



responses/recommendations with respect to work undertaken. Submit log records to the site superintendent within 24 hours of being requested to do so.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)

## 5.4 VEGETATION MANAGEMENT TIMING

GOAL	ESTIMATED PERIOD OF TIME	ACTIVITY
<b>SHORT TERM</b>  <b>(Major eradication and revegetation works to be undertaken within the maintenance period)</b>	0-2 years	<ul style="list-style-type: none"> <li>Native Seed collection (provenance seed) and propagation by bush regeneration contractor.</li> <li>Tree and vegetation protection where required.</li> <li>Erosion control measures undertaken where required.</li> <li>Initial weed removal undertaken using specified techniques.</li> <li>Initial selective canopy and understorey removal to achieve the RFS requirements for bushfire hazard reduction.</li> <li>Secondary weed removal undertaken using specified techniques.</li> <li>Revegetation of nominated areas preferably with plants propagated from provenance seed collection.</li> <li>Monitoring of weed re-infestations and removal as required.</li> <li>Replacement of any lost, stolen or any dead plants</li> <li>General maintenance and replacement of plant stock as required, to ensure effective competition with weed species.</li> <li>Maintenance and replacement of revegetation plant species as required.</li> <li>Ongoing monitoring and maintenance for 2 years and until an 80% survival rate for each species and a maximum weed cover of 5% is achieved.</li> <li>Self sustaining vegetation remnants with little or no weed infestation.</li> <li>Ongoing monitoring and activities to ensure the APZ maintains a tree canopy cover of less than 15% and ground fuel loading of 3 tonnes per hectare.</li> <li>Ongoing monitoring and activities to ensure the FMZ and SP zones maintain a tree canopy cover of less than 30% and ground fuel loading of 5 tonnes per hectare.</li> </ul>
<b>LONG TERM</b>  <b>(Minor Monitoring &amp; Maintenance Activities + Desired Outcomes )</b>	2-20 years	<ul style="list-style-type: none"> <li>Self-sustaining native seed bank and natural recolonisation of native species occurring within the CRZ.</li> <li>Minor monitoring and maintenance activities to be undertaken as required.</li> <li>Nil weed infestation.</li> <li>Weeds species eradicated from the native remnants site.</li> <li>Ongoing maintenance of the APZ, FMZ and SP to achieve the objectives noted above.</li> </ul>

principals:  
 phillip williams  
 steve rushworth  
 ABN:  
 67 129 348 842  
 phone:  
 +61 2 4929 4926  
 Fax:  
 +61 2 4926 3069  
 address:  
 412 king st, newcastle,  
 nsw 2300  
 www.terras.com.au



**Note:** Activities/goals listed under the long term category are intended as desired outcomes due to successful establishment and maintenance throughout the initial short term period (for 2 years and until an 80% survival rate for each species and a maximum weed cover of 5% is achieved). Although self-sustaining, monitoring should be undertaken periodically throughout the long term period to monitor the success of weed eradication and revegetation. Should additional work be required throughout this period it shall be undertaken as approved by the clients agent.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)





## 6. REFERENCES

Australian Bushfire Protection Planners Pty Ltd, (2006), *Bushfire Protection Assessment for the Residential Rezoning of Lot 11 in DP 1044935 & Lot 2 in DP 534168, No: 290 & 302 Minmi Road, Fletcher.*

Department of Primary Industries, Office of Water (2012) *Guidelines for Riparian Corridors on Waterfront land.*

Environmental Appraisal and Planning Pty Ltd (2003) *Flora and Fauna Assessment*

Landcom (2006) *Managing Urban Stormwater : Soils and Construction.*

NSW Rural Fire Service, (2006), *Planning For Bushfire Protection.*

NSW Rural Fire Service, (Unknown), *Standards for Asset Protection Zones.*

Standards Australia (2009) AS 4970-2009 *Protection of Trees on Development Sites.*

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)

## 7. APPENDICES

### 7.1 ACCEPTED WEED REMOVAL TECHNIQUES

Weeds to be removed. The following techniques are recommended by the [NPWS] National Trust, NSW National Parks and Wildlife Service and Australian Association of Bush Regenerators.

#### WOODY WEED REMOVAL TECHNIQUES

##### Removal Techniques:

- Cut and Paint (Woody weeds to 10 cm basal diameter)
- Stem Injection
- Frilling or Chipping

##### Notes

- Plants should be actively growing and in good health;
- Deciduous plants should be treated in spring and autumn when leaves are fully formed;
- For multi-stemmed plants, inject or chip below the lowest branch or treat each stem individually; and
- Herbicides must be injected immediately before plant cells close (within 30 seconds) and translocation of herbicide ceases.

#### SMALL HAND-PULLABLE PLANTS

##### Removal Techniques:

- Hand removal

##### Notes

- Leave weeds so roots are not in contact with the soil e.g. hang in a tree, remove from site or leave on a rock.

#### VINES AND SCRAMBLERS

##### Removal Techniques:

- Hand removal

##### Notes

- Take hold of one runner and pull towards yourself;
- Check points of resistance where fibrous roots grow from the nodes;
- Cut roots with a knife or dig out with a trowel and continue to follow the runner;
- The major root systems need to be removed manually or scrape/cut and painted with herbicide;
- Any reproductive parts need to be bagged.

##### Removal Techniques:

- Stem Scraping

##### Notes

- Scrape 15 to 30 cm of the stem with a knife to reach the layer below the bark/outer layer; and immediately apply herbicide along the length of the scrape.

#### WEEDS WITH UNDERGROUND REPRODUCTIVE STRUCTURES

##### Removal Techniques:

##### HAND REMOVAL OF PLANTS WITH A TAPROOT

- Remove and bag seeds or fruits;



- Push a narrow trowel or knife into the ground beside the tap root, carefully loosen the soil and repeat this step around the taproot;
- Grasp the stem at ground level, rock plant backwards and forwards and gently pull removing the plant; and
- Tap the roots to dislodge soil, replace disturbed soil and pat down.

#### **CROWNING**

- Remove and bag stems with seed or fruit;
- Grasp the leaves or stems together so the base of the plant is visible;
- Insert the knife or lever at an angle close to the crown;
- Cut through all the roots around the crown; and
- Remove and bag the crown.

#### **STEM SWIPING**

- Remove any seed or fruit and bag; and
- Using a herbicide applicator, swipe the stems/leaves.

#### **HERBICIDE TREATMENT**

- Isolated spray with 'Glyphosate'.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



## 7.2 MAINTENANCE SCHEDULES

THE FOLLOWING ACTIVITIES ARE TO BE UNDERTAKEN ON A RECURRENT BASIS TO ENSURE THE HEALTH AND VIGOUR OF THE VMP AREA.																			
STORM AND FLOOD MANAGEMENT																			
ACTIVITY	1 <sup>st</sup> TWELVE MONTHS												SUBSEQUENT MONTHS for remainder of VMP period						AS REQUIRED
	1	2	3	4	5	6	7	8	9	10	11	12	2	4	6	8	10	12	*
INSPECT AND ASSESS SITE FOR STORM DAMAGE.																			
REMOVE ANY RUBBISH OR DEBRIS.																			
REPAIR ANY AREAS AFFECTED BY EROSION CAUSED BY STORM DAMAGE/HIGH FLOW RATES.																			
REPLANT ANY AREAS WHERE PLANTS HAVE BEEN DAMAGED OR WASHED AWAY. VARY SPECIES IF REQUIRED.																			
REMOVE ANY EXCESSIVE SEDIMENTATION OCCURRING WITHIN AREA.																			



PLANT MANAGEMENT AND WEED CONTROL																			
ACTIVITY	1 <sup>st</sup> TWELVE MONTHS												SUBSEQUENT MONTHS for remainder of VMP period						AS REQUIRED
	1	2	3	4	5	6	7	8	9	10	11	12	2	4	6	8	10	12	*
PRIMARY WEEDING																			
SECONDARY WEEDING																			
MAINTENANCE WEEDING																			
COLLECT SEED FOR PROVENANCE PROPAGATION 12 MONTHS IN ADVANCE OF WORKS IF POSSIBLE	←																		
ORDER PLANTS IF NOT PROPAGATING FROM LOCALITY																			
INITIAL PLANTING WORKS																			
INSPECT AND ASSESS SITE FOR ANY PLANT LOSSES OR WEED INFESTATIONS.																			
REPLACE LOST PLANTS WITH EITHER SAME SPECIES OR MORE APPROPRIATE APPROVED SPECIES.																			



UNDERTAKE WEED CONTROL, BY HAND, REMOVING COLLECTED MATERIAL FROM SITE.																			
APPLY SLOW RELEASE FERTILISER IN SPRING AND AUTUMN (VARY TO SUIT).																			
INSPECT PLANTS FOR MOISTURE STRESS AND WATER (ADJUST AS REQUIRED).																			

RUBBISH AND DEBRIS MANAGEMENT																			
ACTIVITY	1 <sup>st</sup> TWELVE MONTHS												SUBSEQUENT MONTHS for remainder of VMP period						AS REQUIRED
	1	2	3	4	5	6	7	8	9	10	11	12	2	4	6	8	10	12	*
PRIMARY BUSHFIRE HAZARD REDUCTION ACTIVITIES, INCLUDING CANOPY THINNING AND UNDERSTOREY TREATMENT.																			
INSPECT AND ASSESS SITE FOR ANY BUILD UP OF LITTER AND / OR DUMPING.																			
IF DUMPING IS RECURRING, LOCATE SOURCE (IF POSSIBLE) AND REPORT TO COUNCIL.																			



PEST CONTROL																			
ACTIVITY	1 <sup>st</sup> TWELVE MONTHS												SUBSEQUENT MONTHS for remainder of VMP period						AS REQUIRED
	1	2	3	4	5	6	7	8	9	10	11	12	2	4	6	8	10	12	*
INSPECT AND ASSESS PLANT MATERIAL FOR PESTS AND OR OTHER DISEASE.																			
CONDUCT PEST/PREDATION CONTROL IF AFFECTING PLANT VIGOUR USING ENVIRONMENTAL LY SENSITIVE METHODS.																			





SEDIMENT AND BIOACCUMULATION MANAGEMENT																			
ACTIVITY	1 <sup>st</sup> TWELVE MONTHS												SUBSEQUENT MONTHS for remainder of VMP period						AS REQUIRED
	1	2	3	4	5	6	7	8	9	10	11	12	2	4	6	8	10	12	*
INSPECT AND ASSESS SITE FOR BUILD-UP OF SEDIMENTATION AND BIO-MASS.																			
CAREFULLY REMOVE SEDIMENTATION ENSURING PLANTS ARE LEFT INTACT.																			
REMOVE BUILD-UP OF BIO-MASS WHERE THERE IS A RISK OF CONGESTED CREEK FLOWS.																			



APZ, FMZ & SP ZONE MANAGEMENT																			
ACTIVITY	1 <sup>st</sup> TWELVE MONTHS												SUBSEQUENT MONTHS for remainder of VMP period						AS REQUIRED
	1	2	3	4	5	6	7	8	9	10	11	12	2	4	6	8	10	12	*
INSPECT AND ASSESS SITE FOR BUILD-UP OF UNDERSTOREY BIO-MASS.																			
CONTROL UNDERSTOREY VEGETATION TO ACHIEVE OBJECTIVES NOTED IN REPORT.																			
SELECTIVELY REMOVE CANOPY TREES TO ACHIEVE REQUIRED DENSITIES.																			
MONITOR AND CONTROL NEW TREE SEEDLING GERMINATION.																			
MONITOR AND MAINTAIN UNDERSTOREY VEGETATION TO ACHIEVE REPORT OBJECTIVES.																			



PHOTO MONITORING																			
ACTIVITY	1 <sup>st</sup> TWELVE MONTHS												SUBSEQUENT MONTHS for remainder of VMP period						AS REQUIRED
PHOTOGRAPH SITE CONDITIONS AT NOMINATED MONITORING POINTS.	1	2	3	4	5	6	7	8	9	10	11	12	2	4	6	8	10	12	*



### 7.3 DRAWINGS WIP01

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)




# vegetation management plan

## the outlook stage 10

01


APRIL 2018



### LEGEND

- EXISTING TREE RETAINED
- EXISTING TREE REMOVED
- PROPOSED STREET TREE (*Acmena smithii*)
- PROPOSED STREET TREE (*Xyanthstemon chrysanthus*)
- PROPOSED STREET TREE (*Syzygium australe*)  
CONTINUATION OF PLANTING FROM WEST ALONG MINMI RD.
- ASSET PROTECTION ZONE (APZ)
- FUEL MANAGED ZONE (FMZ)
- CORE RIPARIAN ZONE (CRZ)
- PARKLAND
- RESIDENTIAL LOTS
- LANDSCAPED BATTERS

site details:  
MINMI ROAD, FLETCHER  
client:  
NORTHWEST RESIDENTIAL  
date:  
04.04.2018  
job number:  
9496.5  
scale:  
1-2000 @ A3  
drawn:  
SGK / RDS / KM  
rev. number:  
G

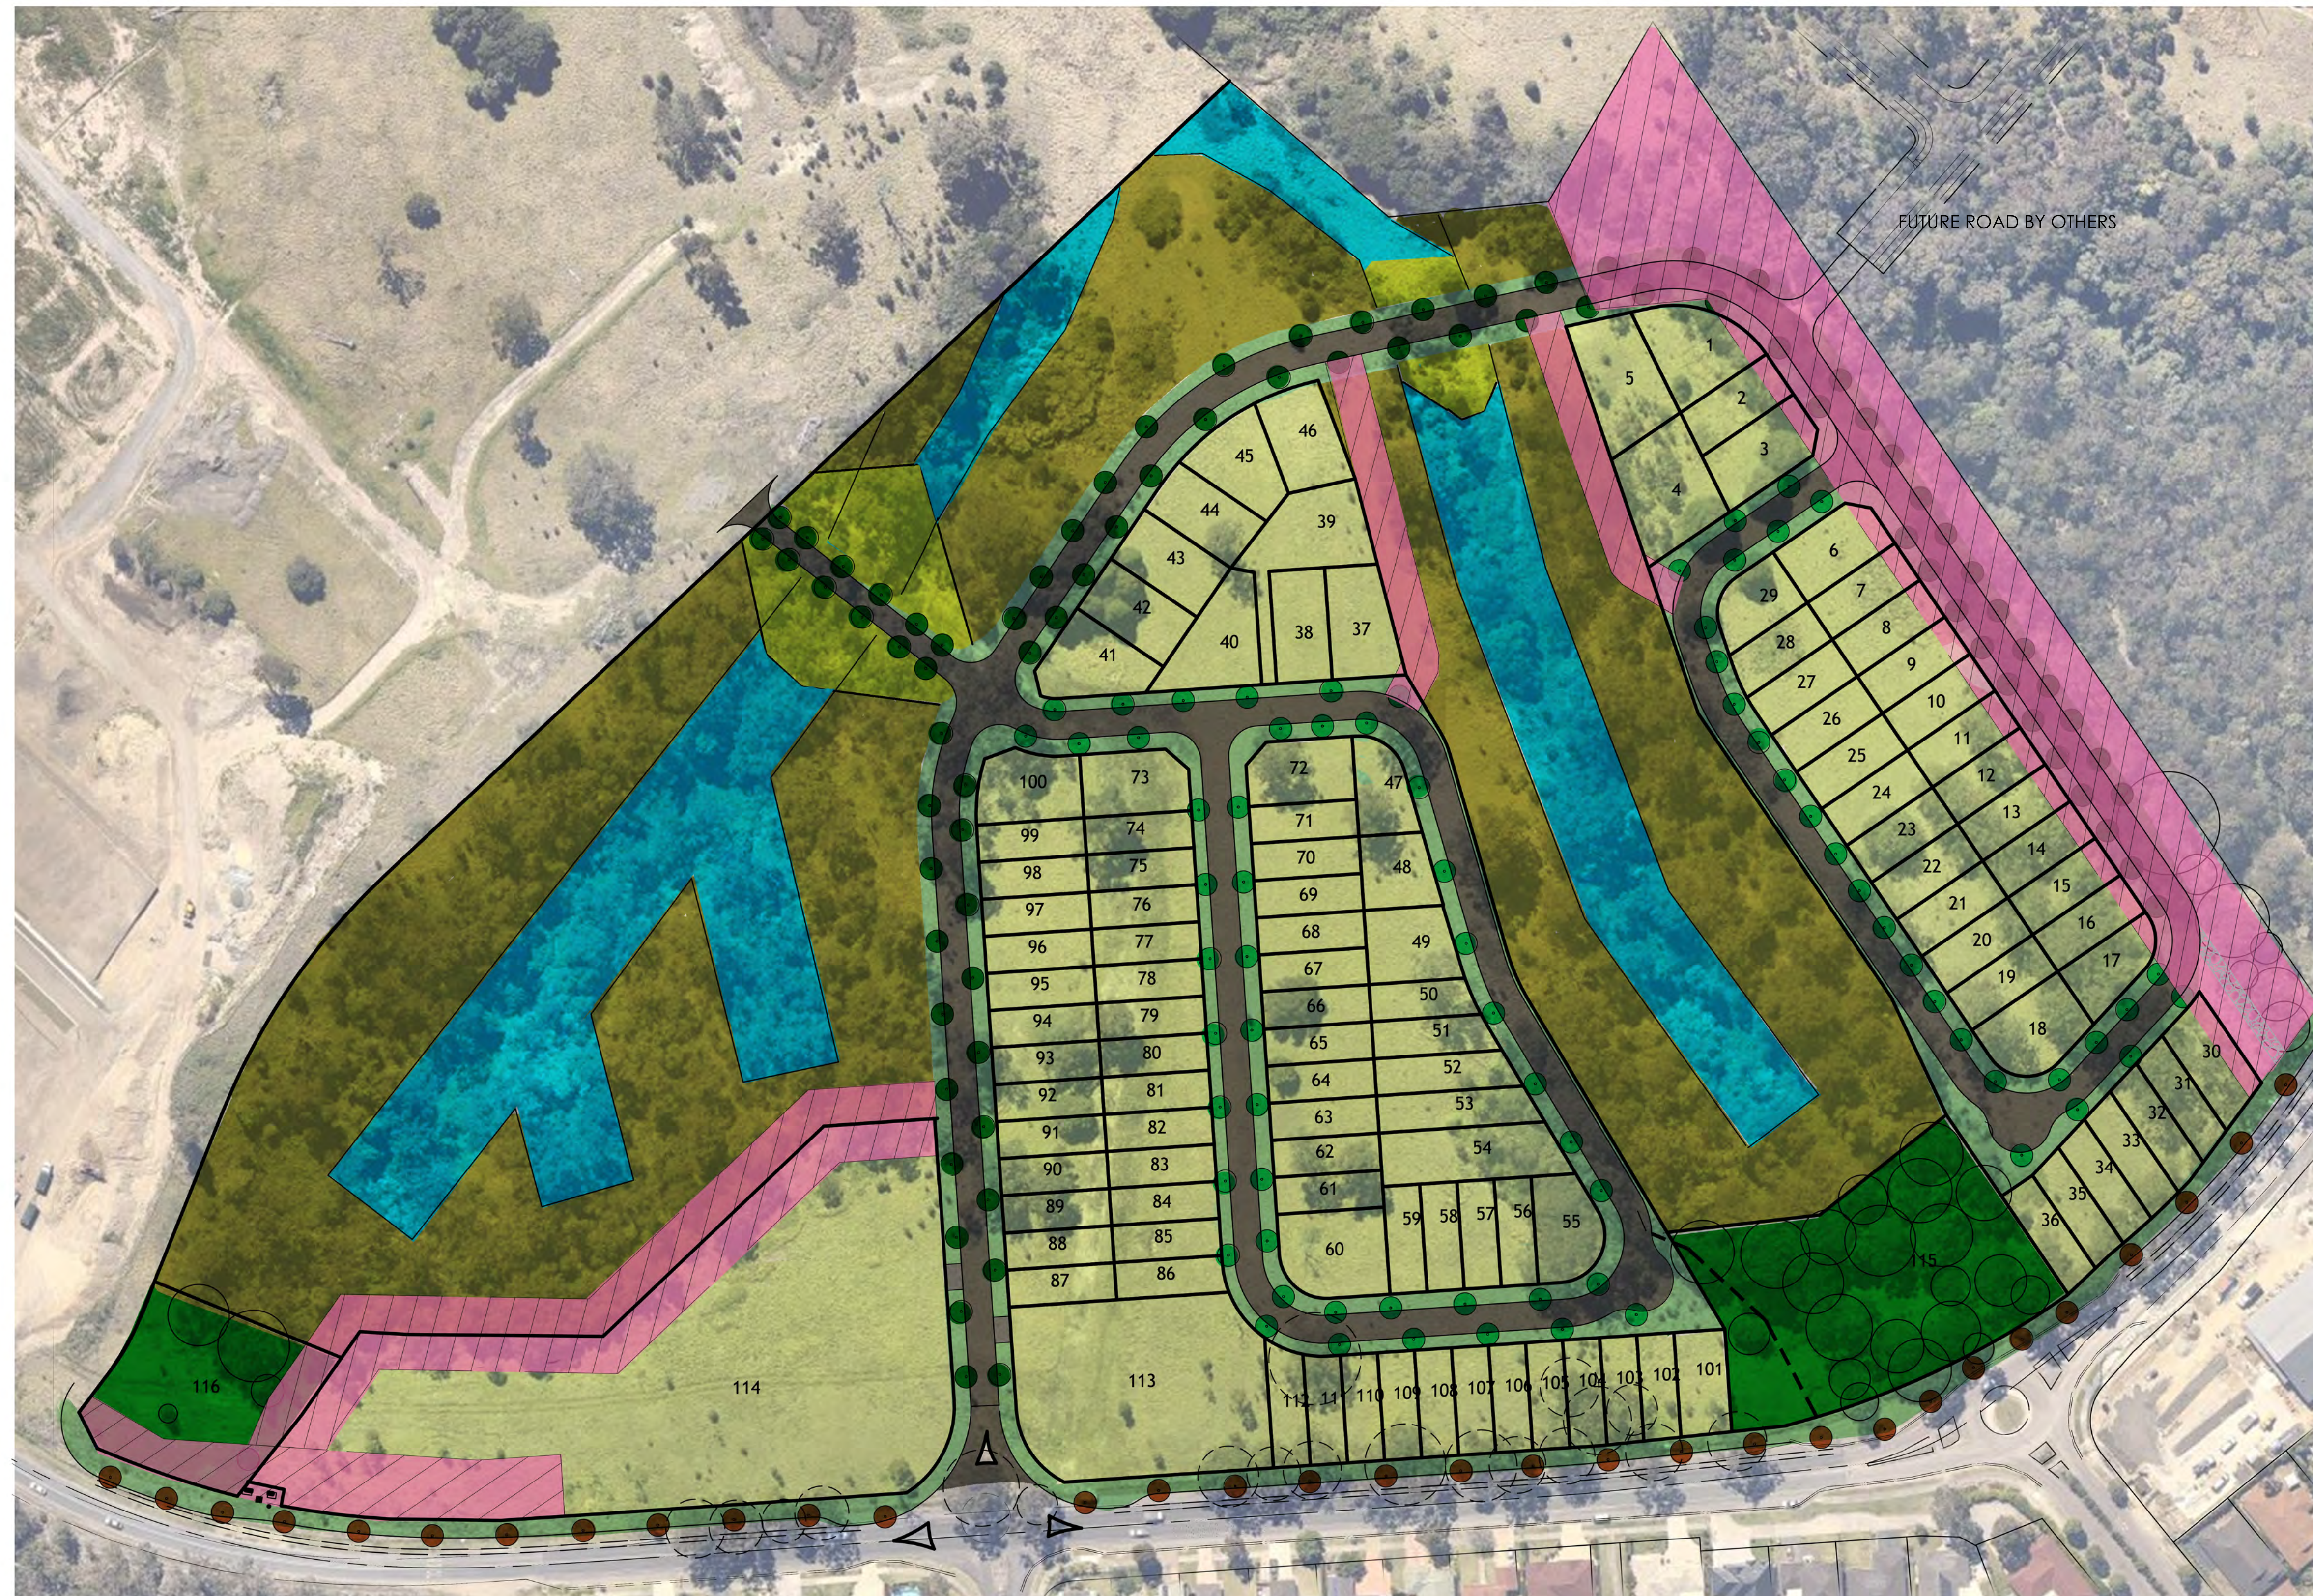





#### 7.4 DRAWINGS WP02

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



# vegetation management plan

## the outlook stage 10

# 02

APRIL 2018



site details:  
MINMI ROAD, FLETCHER  
client:  
NORTHWEST RESIDENTIAL  
date:  
04.04.2018  
job number:  
9496.5  
scale:  
1-2000 @ A3  
drawn:  
SGK / RDS / KM  
rev. number:  
G





## 7.5 DRAWINGS VMP03

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



# vegetation management plan

## the outlook stage 10

03

APRIL 2018



site details:  
MINMI ROAD, FLETCHER  
client:  
NORTHWEST RESIDENTIAL  
date:  
04.04.2018  
job number:  
9496.5  
scale:  
1:2000 @ A3  
drawn:  
SGK / RDS / KM  
rev. number:  
G



**CORE RIPARIAN ZONE (CRZ):**  
REMOVE ALL WEEDS AND RETAIN ALL NATIVE TREES AND UNDERSTOREY VEGETATION.  
THIS ZONE WILL REQUIRE EXTENSIVE REVEGETATION. REFER TO VMP SHEET 04 FOR SUGGESTED SPECIES.

**ASSET PROTECTION ZONE (APZ):**  
REMOVE ALL WEEDS AND RETAIN NATIVE TREES WHERE POSSIBLE. RETAIN TREES AS INDIVIDUAL SPECIMENS OR IN SMALL CLUMPS SO AS TO ACHIEVE A 15% CANOPY DENSITY.  
MAINTAIN THE UNDERSTOREY TO ACHIEVE A MAXIMUM GROUND FUEL LOADING OF 3 TONNES PER HECTARE. REFER TO REPORT FOR DETAILS.

**FUEL MANAGED ZONE (FMZ):**  
REMOVE ALL WEEDS AND RETAIN NATIVE TREES WHERE POSSIBLE. RETAIN TREES AS INDIVIDUAL SPECIMENS OR IN SMALL CLUMPS SO AS TO ACHIEVE A 30% CANOPY DENSITY.  
MAINTAIN THE UNDERSTOREY AS SLASHED PASTURE WHERE THE SLOPE IS SUITABLE.  
AREAS OF STEEPER TOPOGRAPHY ARE TO BE PLANTED OUT WITH LOW NATIVE GRASSES AND GROUNDCOVERS TO PROVIDE EROSION CONTROL AND COMPLIANCE WITH BUSHFIRE PROTECTION REQUIREMENTS IN PERPETUITY.

**SLASHED PASTURE (SP):**  
AREAS OF EXISTING PASTURE WITHIN THE FUEL MANAGED ZONE ARE TO BE MAINTAINED AS SLASHED PASTURE, SO AS TO ASSIST IN ERADICATING WEEDS SUCH AS *SENECIO MADAGASCARIENSIS* (FIREWEED). OCCASIONAL SUPPLEMENTARY TREES TO BE PLANTED, BUT NOT EXCEEDING 30% CANOPY COVER AT MATURITY, AS PER RFS REQUIREMENTS.







## 7.6 DRAWINGS VMP04

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



# vegetation management plan

## the outlook stage 10


04

APRIL 2018

### Suggested re-vegetation species


Botanical Name	Common Name	Pot Size
<b>Trees</b>		
<i>Alphitonia excelsa</i>	Red Ash	2.5 litre
<i>Eucalyptus grandis</i>	Flooded Gum	2.5 litre
<i>Eucalyptus saligna</i>	Blue Gum	2.5 litre
<i>Glochidion ferdinandi</i>	Cheese Tree	2.5 litre
<i>Syncarpia glomulifera</i>	Turpentine	2.5 litre
<i>Syzygium australe</i>	Brush Cherry	2.5 litre
<i>Xanthostemon chrysanthus</i>	Golden Penda	2.5 litre
<b>Shrubs</b>		
<i>Acacia falcata</i>	Wattle	tubestock
<i>Breynia oblongifolia</i>	Coffee Bush	tubestock
<i>Ficus coronata</i>	Sandpaper Fig	tubestock
<i>Hibiscus heterophyllus</i>	Native Rosella	tubestock
<i>Melaleuca linariifolia</i>	Snow in Summer	tubestock
<i>Melaleuca stypheloides</i>	Prickly Paper Bark	tubestock
<i>Polyscias sambucifolius</i>	Elderberry Panax	tubestock
<b>Groundcovers and Grasses</b>		
<i>Carex appressa</i>	Tussock Sedge	tubestock
<i>Cissus antarctica</i>	Kangaroo Vine	tubestock
<i>Commersonia fraseri</i>	Brush Kurrajong	tubestock
<i>Cymbopogon refractus</i>	Barbed Wire Grass	tubestock
<i>Dianella caerulea</i>	Flax Lily	tubestock
<i>Kennedia rubicunda</i>	Dusky Coral Pea	tubestock
<i>Hardenbergia violacea</i>	Native Sarsparilla	tubestock
<i>Hibbertia scandens</i>	Twining Guinea Flower	tubestock
<i>Imperata cylindrica</i>	Blady Grass	tubestock
<i>Lomandra longifolia</i>	Spiny Matt-Rush	tubestock
<i>Themeda australis</i>	Kangaroo Grass	tubestock
<i>Viola hederacea</i>	Native Violet	tubestock

**NOTE:**  
SPRAY PASTURE GRASS WITHIN PROPOSED PLANTING LOCATIONS AND LIGHTLY CULTIVATE / RIP TOPSOIL IN PREPARATION FOR PLANTING. PROVIDE FOLLOW-UP WEED TREATMENT AS REQUIRED PRIOR TO PLANTING.

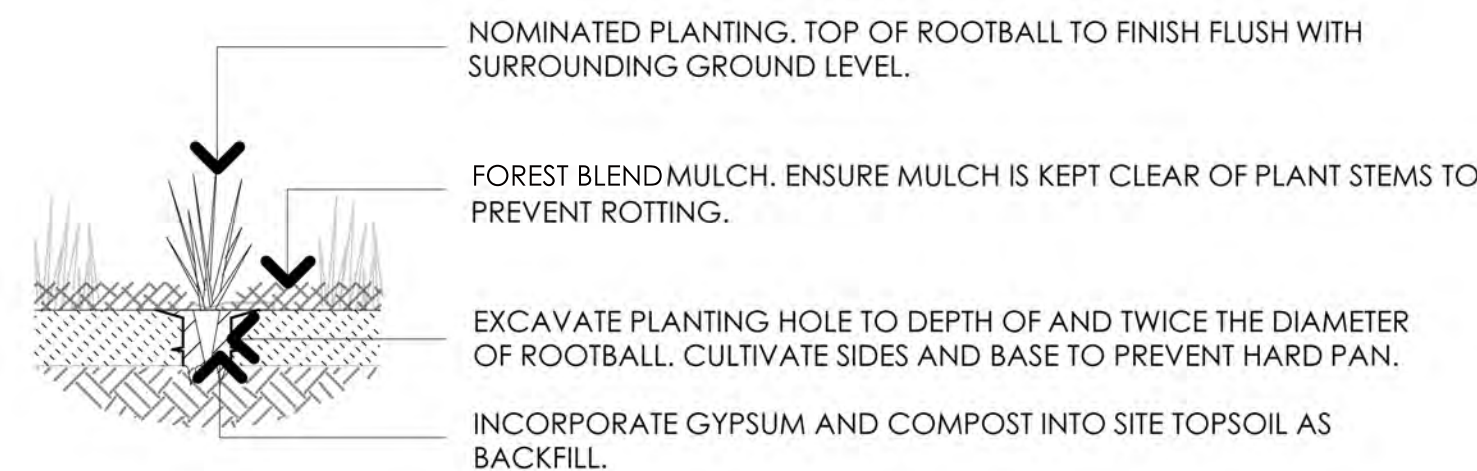

D1 MASS PLANTING: TUBE  
Typical Detail

**NOTE:**  
REMOVE PASTURE GRASSES AND WEEDS TO 400MM SQUARE AT PROPOSED PLANTING LOCATIONS. PROVIDE FOLLOW-UP TREATMENT AS REQUIRED PRIOR TO PLANTING.

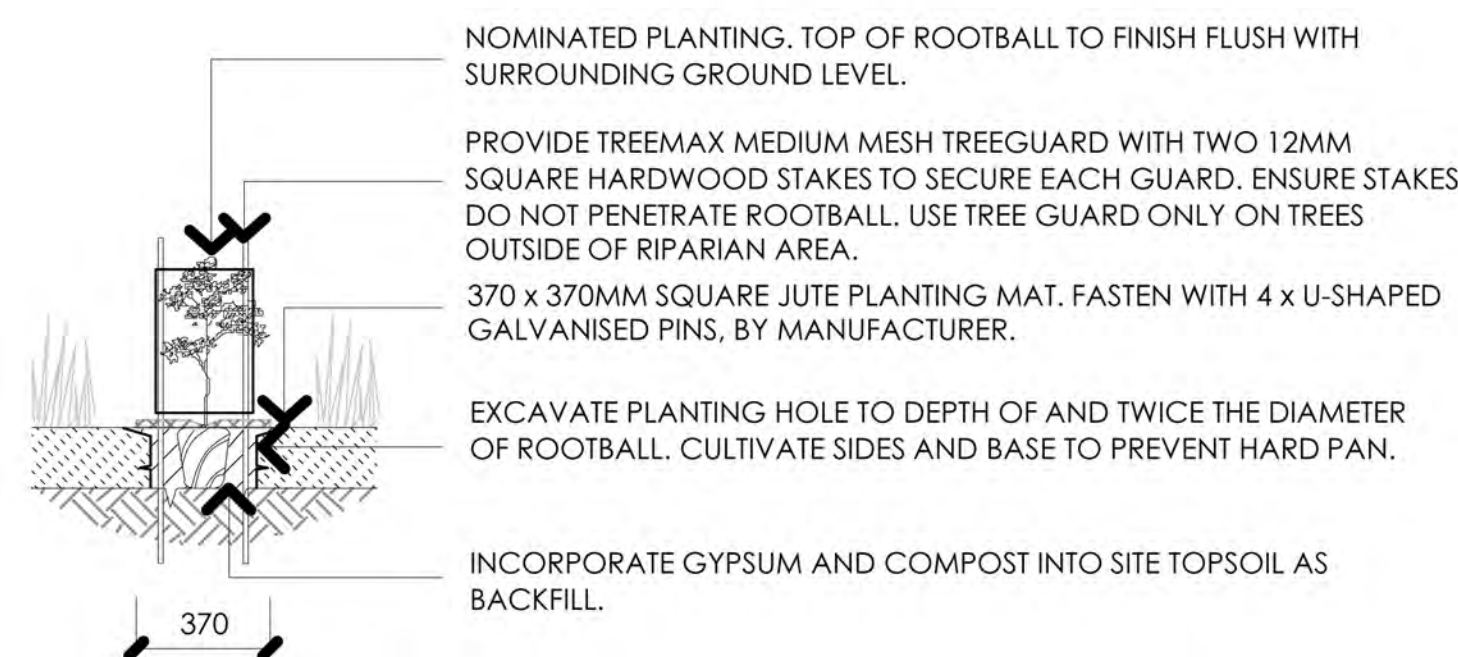

D2 SUPPLEMENTARY PLANTING: 2.5 LITRE POTS  
Typical Detail

**INSTALL TEMPORARY PROTECTIVE FENCING ALONG WESTERN EXTENT OF WORKS TO PREVENT ENCROACHMENT BY CONSTRUCTION WORKS INTO SUBJECT SITE.**

USE OFFSETS SHOWN WHERE FENCING SHALL ADJOIN EXISTING TREES TO BE RETAINED (WHERE APPLICABLE).


FENCING TO BE FREE STANDING TEMPORARY CONSTRUCTION FENCING.

#### NOTES:

TREE PROTECTIVE FENCING SHALL BE IN PLACE BEFORE ANY OTHER SITE WORK IS UNDERTAKEN. FENCE MUST BE STRONG AND VISIBLE. POST NOTICES TO KEEP MACHINERY, VEHICLES AND PEOPLE OUT.

NO MATERIAL STOCKPILES ARE TO BE STORED OR PLANT / MACHINERY TRAFFIC OR PARKING IS TO OCCUR WITHIN THE DRIPLINE OF RETAINED TREES.

BEFORE WORK BEGINS, THE RETAINED TREES SHALL BE INSPECTED BY A QUALIFIED ARBORIST AND ANY REQUIRED PRUNING OR ANCILLARY WORK CARRIED OUT.

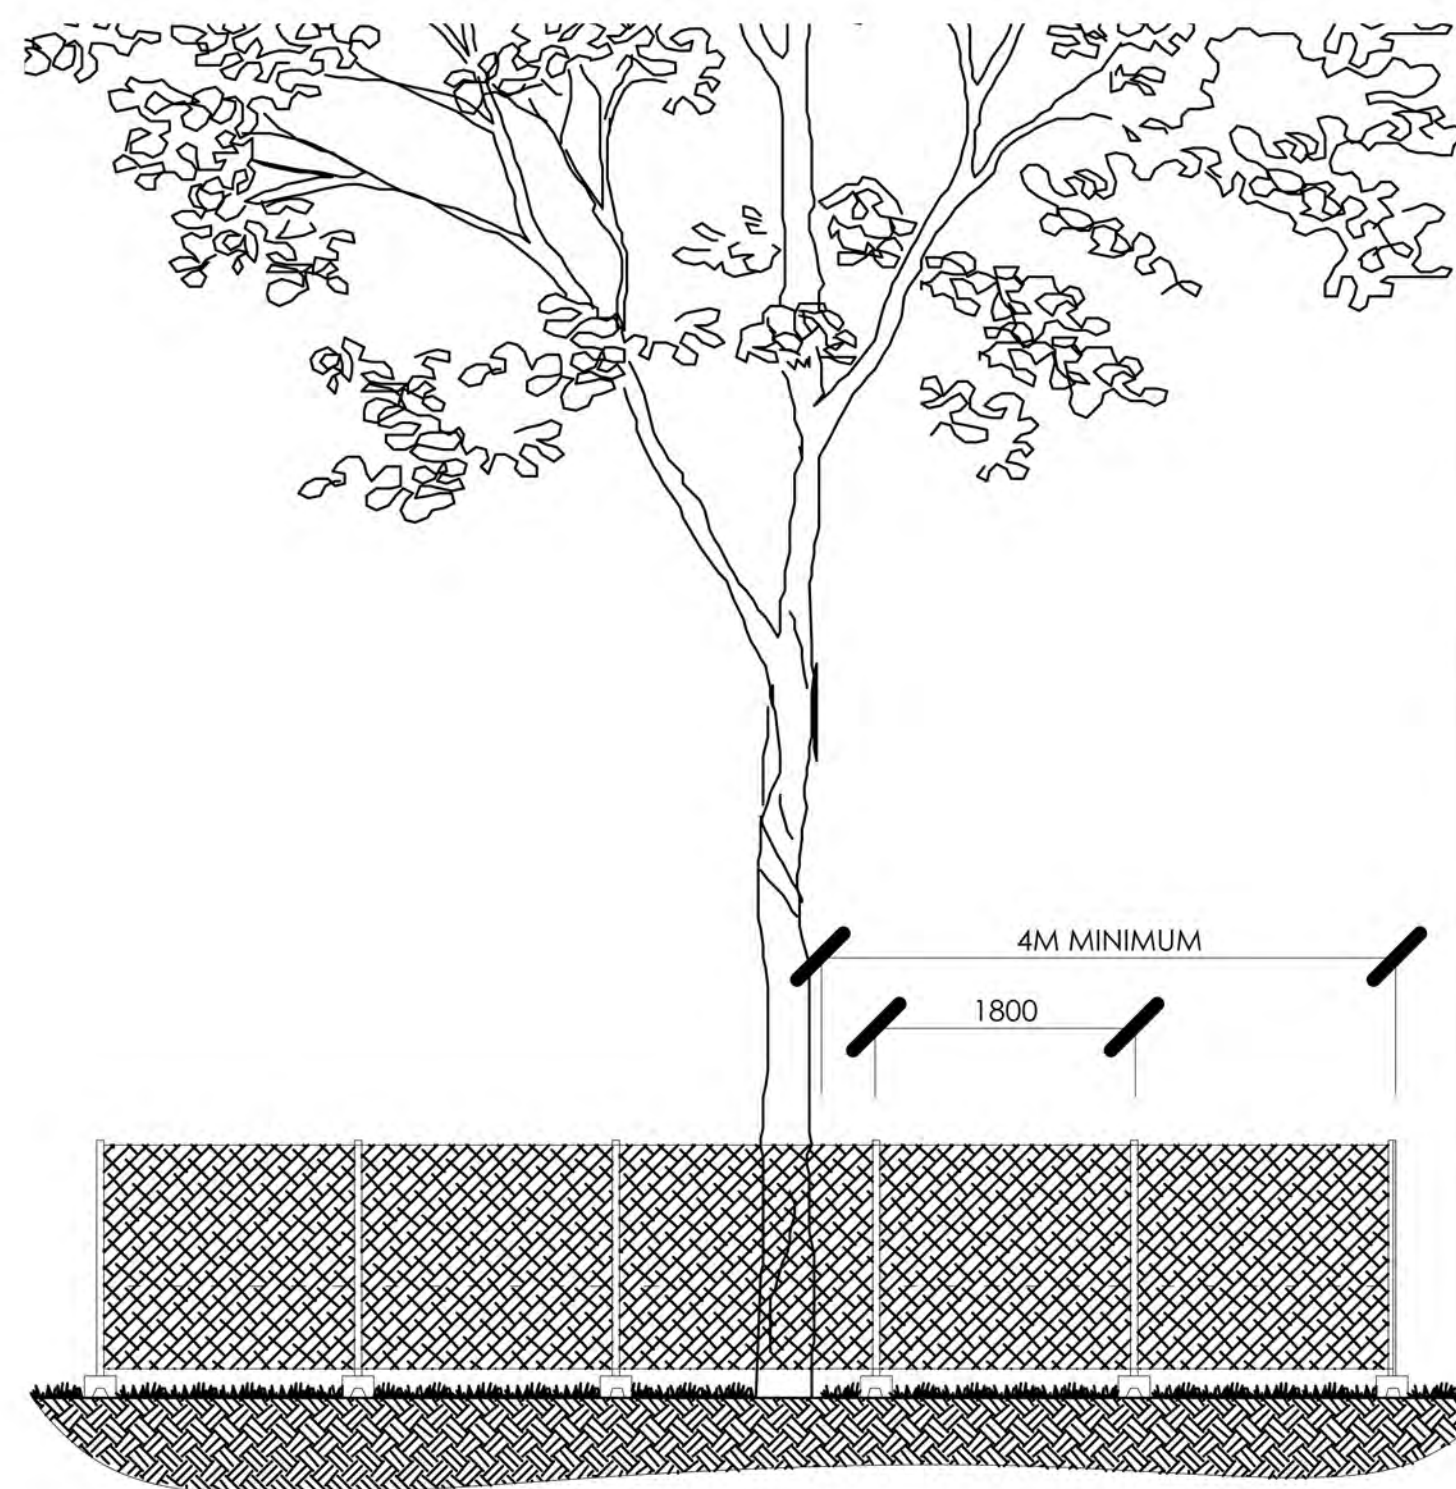

D3 TEMPORARY PROTECTIVE FENCING (TPF)  
Typical Detail



Alphitonia excelsa (Red Ash)



Eucalyptus grandis (Flooded Gum)



Glochidion ferdinandi (Cheese Tree)



Syncarpia glomulifera (Turpentine)



Carex appressa (Tall Rush)



Kennedia rubicunda (Dusky Coral Pea)



Lomandra longifolia (Spiny Matt-Rush)



Hibbertia scandens (Twining Guinea Flower)



Hardenbergia violacea  
(False Sarsparilla)



Hibiscus heterophyllus  
(Native Rosella)

site details:  
MINMI ROAD, FLETCHER  
client:  
NORTHWEST RESIDENTIAL  
date:  
04.04.2018  
job number:  
9496.5  
scale:  
N/A  
drawn:  
SGK/ RDS / KM  
rev. number:  
G



## 7.7 SITE IMAGES

The following images are intended to act as a reference and document the condition of the site's vegetation at the time fieldwork was undertaken.



Image 1.

Lantana camara forms an impenetrable barrier around the perimeter of the gullies.

principals:  
 phillip williams  
 steve rushworth  
 ABN:  
 67 129 348 842  
 phone:  
 +61 2 4929 4926  
 Fax:  
 +61 2 4926 3069  
 address:  
 412 king st, newcastle,  
 nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



Image 2.  
Pasture areas around the gully.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



Image 3.

Many of the trees along Minmi Road have a short Useful Life Expectancy.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)





Image 4.  
Lantana infestation in upper slope areas.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)



Image 5.

A number of trees have germinated since grazing has ceased.

principals:  
phillip williams  
steve rushworth  
ABN:  
67 129 348 842  
phone:  
+61 2 4929 4926  
Fax:  
+61 2 4926 3069  
address:  
412 king st, newcastle,  
nsw 2300  
[www.terras.com.au](http://www.terras.com.au)