

APPENDIX J NOISE ASSESSMENT

SUNRAYZIA SOLAR FARM, BALRANLAD

Construction & Operational Noise & Vibration Assessment

23 November 2016

NGH Environmental

TJ286-01F02 Report (r1)

Document details

Detail	Reference
Doc reference:	TJ286-01F02 Report (r1)
Prepared for:	NGH Environmental
Address:	18/21 Mary Street Surry Hills NSW 2010
Attention:	Mr Raphael Morgan

Document control

Date	Revision history	Non-issued revision	Issued revision	Prepared	Instructed	Authorised
23.11.2016	Generate report	0	1	WC	MCH	MCH
23.11.2016	Update for comments		2	WC	MCH	MCH

Important Disclaimer:

The work presented in this document was carried out in accordance with the Renzo Tonin & Associates Quality Assurance System, which is based on Australian Standard / NZS ISO 9001.

This document is issued subject to review and authorisation by the Team Leader noted by the initials printed in the last column above. If no initials appear, this document shall be considered as preliminary or draft only and no reliance shall be placed upon it other than for information to be verified later.

This document is prepared for the particular requirements of our Client referred to above in the 'Document details' which are based on a specific brief with limitations as agreed to with the Client. It is not intended for and should not be relied upon by a third party and no responsibility is undertaken to any third party without prior consent provided by Renzo Tonin & Associates. The information herein should not be reproduced, presented or reviewed except in full. Prior to passing on to a third party, the Client is to fully inform the third party of the specific brief and limitations associated with the commission.

In preparing this report, we have relied upon, and presumed accurate, any information (or confirmation of the absence thereof) provided by the Client and/or from other sources. Except as otherwise stated in the report, we have not attempted to verify the accuracy or completeness of any such information. If the information is subsequently determined to be false, inaccurate or incomplete then it is possible that our observations and conclusions as expressed in this report may change.

We have derived data in this report from information sourced from the Client (if any) and/or available in the public domain at the time or times outlined in this report. The passage of time, manifestation of latent conditions or impacts of future events may require further examination and re-evaluation of the data, findings, observations and conclusions expressed in this report.

We have prepared this report in accordance with the usual care and thoroughness of the consulting profession, for the sole purpose described above and by reference to applicable standards, guidelines, procedures and practices at the date of issue of this report. For the reasons outlined above, however, no other warranty or guarantee, whether expressed or implied, is made as to the data, observations and findings expressed in this report, to the extent permitted by law.

The information contained herein is for the purpose of acoustics only. No claims are made and no liability is accepted in respect of design and construction issues falling outside of the specialist field of acoustics engineering including and not limited to structural integrity, fire rating, architectural buildability and fit-for-purpose, waterproofing and the like.

Supplementary professional advice should be sought in respect of these issues.

Contents

1	Introduction	5
2	Project Description	6
2.1	Background Information	6
2.2	Regulatory Requirements	6
2.3	Receiver Locations	7
2.4	Hours of Operation	7
2.4.1	Construction	7
2.4.2	Operation	7
3	Existing Noise Environment	9
3.1	Noise Monitoring Locations	9
3.2	Existing Background & Ambient Noise Levels	9
4	Construction Noise Assessment	11
4.1	Construction Noise Management Levels	11
4.2	Construction Noise Sources	12
4.3	Construction Noise Assessment	13
5	Operational Noise Assessment	15
5.1	Operational Noise Criteria	15
5.1.1	Intrusiveness Criteria	15
5.1.2	Amenity Criteria	15
5.1.3	Sleep Disturbance	16
5.2	Operational Noise Sources	17
5.3	'Modifying Factor' Adjustments	18
5.4	Operational Noise Assessment	18
5.5	Sleep Disturbance Assessment	19
6	Vibration Assessment	20
6.1	Vibration Criteria	20
6.2	Potential Vibration Impacts	22
7	Road Traffic Noise Assessment	23
7.1	Road Traffic Noise Criteria	23
7.2	Predicted Road Traffic Noise	23
8	Conclusion	25
APPENDIX A	Glossary of Terminology	26
APPENDIX B	Long-Term Noise Monitoring Methodology	28
B.1	Noise Monitoring Equipment	28
B.2	Meteorology During Monitoring	28
B.3	Noise vs Time Graphs	28

APPENDIX C	Long Term Noise Monitoring Results	29
------------	------------------------------------	----

List of tables

Table 3.1	– Measured Existing Background (L_{90}) & Ambient (L_{eq}) Noise Levels, dB(A)	10
Table 4.1	– Noise Management Levels at Residential Receivers	12
Table 4.2	– Construction Noise Management Levels at Residential Receivers	12
Table 4.3	– Typical Construction Equipment & Sound Power Levels	13
Table 4.4	– Predicted $L_{Aeq,15min}$ Construction Noise Levels at Receiver Locations, dB(A)	14
Table 5.1	– Intrusiveness Noise Criteria, dB(A)	15
Table 5.2	– Applicable Amenity Noise Criteria, dB(A)	16
Table 5.3	– Sleep Disturbance Criteria, dB(A)	17
Table 5.4	– Typical Operational Plant and Equipment & Sound Power Levels	18
Table 5.5	– Predicted $L_{Aeq,15min}$ Operational Noise Levels at Receiver Locations, dB(A)	19
Table 6.1	– Types of Vibration	20
Table 6.2	– Preferred and Maximum Levels for Human Comfort	21
Table 6.3	– Acceptable Vibration Dose Values for Intermittent Vibration ($m/s^{1.75}$)	21
Table 6.4	– Potential Vibration Impacts for Identified Receivers	22
Table 7.1	– RNP Road Traffic Noise Criteria, dB(A)	23
Table 7.2	– Predicted Road Traffic Noise Contribution Levels Along Public Roads, dB(A) $L_{Aeq(15\text{ Hour})}$	24

List of figures

Figure 1	– Site, Surrounds and Receiver and Noise Monitoring Locations	8
Figure 2	– Orthogonal Axes for Human Exposure to Vibration	21

1 Introduction

Renzo Tonin & Associates was engaged to conduct an environmental noise and vibration assessment of the proposed Sunraysia Solar Farm located at Balranald in southern New South Wales as part of the Environmental Impact Statement (EIS) for the project. Noise and vibration impacts from the construction and operation phases of the project will be addressed in this report in accordance with relevant Council and EPA requirements and guidelines.

The work documented in this report was carried out in accordance with the Renzo Tonin & Associates Quality Assurance System, which is based on Australian Standard / NZS ISO 9001. Appendix A contains a glossary of acoustic terms used in this report.

2 Project Description

2.1 Background Information

The Sunraysia Solar Farm project includes the construction and operation of a solar photovoltaic (PV) plant and associated infrastructure, with a capacity of approximately 200 MWAC.

The subject site is identified as Lots 9, 10, 11 and 14 of DP 751179, approximately 17km south of the Balranald town centre and approximately 140km south east of Mildura, within the Balranald Shire Council Local Government Area (LGA). The Sunraysia Solar Farm is about 1,000 hectares of which 800 hectares will be developed and installed with ground mounted solar panels.

2.2 Regulatory Requirements

The Secretary's Environmental Assessment Requirements (SEAR) and Environment Protection Authority (EPA) Submission for the project nominate the following specific noise issues to be addressed in this assessment.

Secretary's Environmental Assessment Requirements (SEAR)	Section of Report Addressing SEAR Content
Noise - including an assessment of the construction, upgrading and decommissioning noise impacts of the development in accordance with the Interim Construction Noise Guideline (ICNG) and sub-station noise impacts in accordance with the NSW Industrial Noise Policy (INP), and a description of the measures that would be implemented to mitigate any impacts if the assessment shows construction, upgrading or decommissioning noise is likely to exceed applicable criteria	Sections 4, 5, 6 and 7

Noise and vibration impacts are assessed in accordance with a number of policies, guidelines and standards, including:

- NSW 'Interim Construction Noise Guideline' (ICNG – Department of the Environment and Climate Change, 2009);
- NSW 'Industrial Noise Policy' (INP – EPA, 2000);
- 'Assessing Vibration: A Technical Guideline' (Department of the Environment and Climate Change, 2006); and
- NSW 'Road Noise Policy' (RNP – Department of Environment, Climate Change and Water, 2011)

2.3 Receiver Locations

The nearest affected receivers were identified during a site visit and through aerial maps as follows:

- **Receiver R1 – 3003 Yanga Way, Kyalite**
Residential property located approximately 1,400m directly south of the project area.

The next nearest receiver is located in excess of 4km from the subject site and deemed too far to warrant and acoustic assessment.

Figure 1 provides details of the site, surrounds and receiver locations

2.4 Hours of Operation

2.4.1 Construction


Construction will occur during the following standard hours of construction:

- Monday to Friday: 7:00am to 6:00pm
- Saturday: 8:00am to 1:00pm
- No work on Sundays or public holidays

2.4.2 Operation

The solar farm will operate autonomously during times when there is sunlight. This will predominantly be during day and evening periods (7am-6pm and 6pm-10pm, respectively) throughout the year and potentially part of the night time period (prior to 7am) during the summer months.

Figure 1 – Site, Surrounds and Receiver and Noise Monitoring Locations

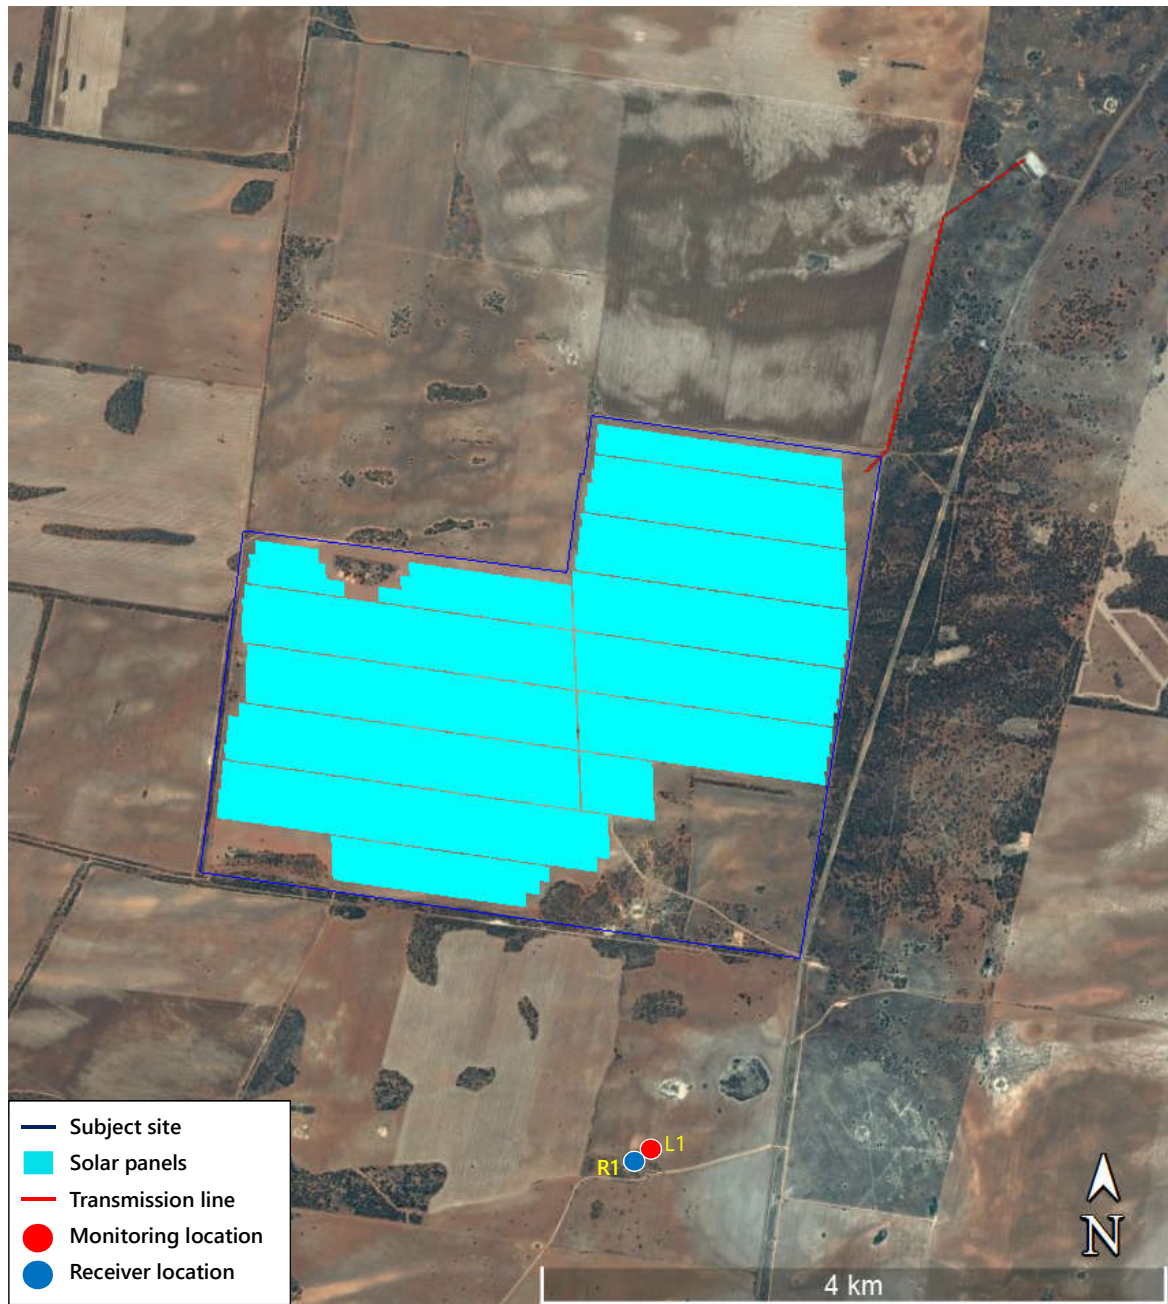

3 Existing Noise Environment

Background noise varies over the course of any 24 hour period, typically from a minimum at 3am in the morning to a maximum during morning and afternoon traffic peak hours. Therefore, the NSW 'Industrial Noise Policy' (INP – Environment Protection Authority NSW 2000) requires that the level of background and ambient noise be assessed separately for the daytime, evening and night-time periods. The NSW INP defines these periods as follows:

- **Day** is defined as 7:00am to 6:00pm, Monday to Saturday and 8:00am to 6:00pm Sundays & Public Holidays.
- **Evening** is defined as 6:00pm to 10:00pm, Monday to Sunday & Public Holidays.
- **Night** is defined as 10:00pm to 7:00am, Monday to Saturday and 10:00pm to 8:00am Sundays & Public Holidays.

3.1 Noise Monitoring Locations

Noise monitoring is to be undertaken at the nearest or potentially most affected residential locations. In this case the nearest and potentially most affected location where noise monitoring was undertaken was as follows.

- **Location L1 – 3003 Balranald-Tooleybuc Road, Kyalite**
Noise monitor was installed near the dwelling and in the 'free field' (ie. away from building facades). Noise data represents the background and ambient noise environment for residences surrounding the project area.

To quantify the existing ambient noise environment, long-term (unattended) noise monitoring was conducted at Location L1 between Tuesday 11th and Thursday 20th October 2016.

Appendix A of this report presents a description of noise terms. Appendix B details the noise monitoring methodology and the graphical recorded outputs from long term noise monitoring are included in Appendix C. The graphs in Appendix C were analysed to determine an assessment background level (ABL) for each day, evening and night period in each 24 hour period of noise monitoring, and based on the median of individual ABLs an overall single Rating Background Level (RBL) for the day, evening and night period is determined over the entire monitoring period in accordance with the NSW INP.

3.2 Existing Background & Ambient Noise Levels

Existing background and ambient noise levels are presented in Table 3.1 below. The noise monitor was positioned outdoors in the 'free-field' (ie. away from building facades). Construction and operation noise from the site should be assessed away from the facade at the potentially most affected residential boundaries and therefore, the representative noise levels listed in Table 3.1 are directly applicable.

Table 3.1 – Measured Existing Background (L₉₀) & Ambient (L_{eq}) Noise Levels, dB(A)

Location	L ₉₀ Background Noise Levels			L _{eq} Ambient Noise Levels		
	Day	Evening	Night	Day	Evening	Night
L1 – 3003 Balranald-Tooleybuc Road, Kyalite	25	18	17	46	44	40

The identified receivers surrounding the subject site are all classified as rural under INP guidelines. It was found that the background noise levels are representative of residences in a rural environment with day time, evening and night time background noise levels below 30dB(A).

Based on page 24 of the INP, where background noise levels are less than 30dB(A), the minimum applicable background noise level is recommended to be set at **30dB(A)**. Therefore, this minimum background noise level has been adopted for all receiver locations nominated in Section 2.3 during all assessment periods.

4 Construction Noise Assessment

4.1 Construction Noise Management Levels

The NSW 'Interim Construction Noise Guideline' (ICNG, 2009) provides guidelines for assessing noise generated during the construction phase of developments.

The key components of the guideline that are incorporated into this assessment include:

- *Use of L_{Aeq} as the descriptor for measuring and assessing construction noise*

NSW noise policies, including the INP, RNP and RING have moved to the primary use of L_{Aeq} over any other descriptor. As an energy average, L_{Aeq} provides ease of use when measuring or calculating noise levels since a full statistical analysis is not required as when using, for example, the L_{A10} descriptor.

- *Application of reasonable and feasible noise mitigation measures*

As stated in the ICNG, a noise mitigation measure is feasible if it is capable of being put into practice, and is practical to build given the project constraints.

Selecting reasonable mitigation measures from those that are feasible involves making a judgement to determine whether the overall noise benefit outweighs the overall social, economic and environmental effects.

The ICNG provides two methods for assessment of construction noise, being either a quantitative or a qualitative assessment. A quantitative assessment is recommended for major construction projects of significant duration, and involves the measurement and prediction of noise levels, and assessment against set criteria. A qualitative assessment is recommended for small projects with duration of less than three weeks and focuses on minimising noise disturbance through the implementation of reasonable and feasible work practices, and community notification.

Given the length of the construction works proposed, a quantitative assessment is carried out herein, consistent with the ICNG requirements.

Table 4.1 reproduced from the ICNG, sets out the noise management levels and how they are to be applied for residential receivers.

Table 4.1 – Noise Management Levels at Residential Receivers

Time of Day	Management Level L_{Aeq} (15 min)	How to Apply
Recommended standard hours: Monday to Friday 7 am to 6 pm Saturday 8 am to 1 pm No work on Sundays or public holidays	Noise affected RBL + 10dB(A)	The noise affected level represents the point above which there may be some community reaction to noise. Where the predicted or measured L_{Aeq} (15 min) is greater than the noise affected level, the proponent should apply all feasible and reasonable work practices to meet the noise affected level. The proponent should also inform all potentially impacted residents of the nature of works to be carried out, the expected noise levels and duration, as well as contact details.
	Highly noise affected 75dB(A)	The highly noise affected level represents the point above which there may be strong community reaction to noise. Where noise is above this level, the relevant authority (consent, determining or regulatory) may require respite periods by restricting the hours that the very noisy activities can occur, taking into account: <ul style="list-style-type: none"> • times identified by the community when they are less sensitive to noise (such as before and after school for works near schools, or mid-morning or mid-afternoon for works near residences • if the community is prepared to accept a longer period of construction in exchange for restrictions on construction times.
Outside recommended standard hours	Noise affected RBL + 5dB(A)	A strong justification would typically be required for works outside the recommended standard hours. The proponent should apply all feasible and reasonable work practices to meet the noise affected level. Where all feasible and reasonable practices have been applied and noise is more than 5dB(A) above the noise affected level, the proponent should negotiate with the community. For guidance on negotiating agreements see section 7.2.2 of the ICNG.

Table 4.2 presents the construction noise management levels established for the nearest noise sensitive residential receivers based upon the noise monitoring outlined in Section 3.1, the proposed construction hours and the above ICNG requirements. The receiver locations are marked in Figure 1.

Table 4.2 – Construction Noise Management Levels at Residential Receivers

Location Description	Day L_{A90} Background Noise Level (RBL)	Day Noise Management Level $L_{Aeq}(15min)$
All residential receivers	30 ¹	40

Notes: 1. Construction works occur during the daytime period only, hence only the day period assessed

4.2 Construction Noise Sources

The following table lists plant and equipment likely to be used by the contractor to carry out the necessary construction works for the project.

Table 4.3 – Typical Construction Equipment & Sound Power Levels

Plant Item	Plant Description	Number of Items	L_{Aeq} Sound Power Levels, dB(A) re. 1pW Single Item
1	Pile Drilling Rig	Up to 10	111
2	Powered Hand Tools	Up to 10	110
3	Mobile Crane	Up to 10	110
4	Truck and Dog	Up to 10	108
5	Excavator	Up to 10	107
6	Generator	Up to 10	100
7	Delivery Van	Up to 10	88

The sound power levels for the majority of activities presented in the above table are provided by the client, based on maximum levels given in Table A1 of Australian Standard 2436 - 2010 'Guide to Noise Control on Construction, Demolition and Maintenance Sites', the ICNG, information from past projects and/or information held in our library files.

4.3 Construction Noise Assessment

Noise emissions were predicted by modelling the noise sources, receiver locations, topographical features of the intervening area, and possible noise control treatments using CadnaA (version 4.6) noise modelling computer program. The program calculates the contribution of each noise source at each specified receptor point and allows for the prediction of the total noise from a site.

The noise prediction models takes into account:

- Location of noise sources and receiver locations;
- Height of sources and receivers;
- Separation distances between sources and receivers;
- Ground type between sources and receivers (soft); and
- Attenuation from barriers (natural and purpose built).

Noise levels at any receptors resulting from construction would depend on the above and the type and duration of construction being undertaken. Furthermore, noise levels at receivers would vary substantially over the total construction program due to the transient nature and large range of plant and equipment that could be used.

Table 4.4 presents noise levels likely to be experienced at the nearby affected receiver locations during the construction works. The presented levels are a worst case maximum with all plant and equipment operating concurrently.

Table 4.4 – Predicted $L_{Aeq,15min}$ Construction Noise Levels at Receiver Locations, dB(A)

Receiver location	Noise Management Level ¹	Predicted Construction Noise Levels, $L_{Aeq,(15min)}$ ²	Comply? (Yes/No)
Receiver R1	40	<20 – 32	Yes

Notes: 1. Noise Management Level for day period

2. Based on all construction plant and equipment operating concurrently. Higher level in range occurs when plant and equipment are at closest proximity to receiver and lower level in range occurs when plant and equipment are furthest.

Based on the predicted construction noise levels presented in the table above, predicted noise levels from construction activities at the nearest receiver comply with the construction noise management levels under the worst case scenario where all plant items are operating concurrently.

Therefore, no further reasonable and feasible noise mitigation measures are required to reduce construction noise impacts.

5 Operational Noise Assessment

5.1 Operational Noise Criteria

Noise impact from the general operation of the proposed solar farm is assessed against the NSW Industrial Noise Policy (INP). The assessment procedure in terms of the INP has two components:

- Controlling intrusive noise impacts in the short term for residences
- Maintaining noise level amenity for particular land uses for residences and other land uses.

In accordance with the INP, noise impact should be assessed in terms of both intrusiveness and amenity.

5.1.1 Intrusiveness Criteria

According to the NSW INP, the intrusiveness of a mechanical noise source may generally be considered acceptable if the equivalent continuous (energy-average) A-weighted level of noise from the source (represented by the L_{Aeq} descriptor), measured over a 15-minute period, does not exceed the background noise level measured in the absence of the source by more than 5dB(A). It is noted that this is applicable to residential properties only.

Therefore, the intrusiveness criterion for residential noise receptors as summarised in the INP is as follows:

$$L_{Aeq, 15 \text{ minute}} \leq \text{Rating Background Level (L}_{A90}) + 5 \text{ dB(A)}$$

Based on the monitored background noise levels presented in Section 3.2 and the proposed operating hours of the solar farm, the intrusiveness criteria for the potentially most affected residential receiver locations are presented below.

Table 5.1 – Intrusiveness Noise Criteria, dB(A)

Receiver location	Intrusiveness Criteria – $L_{Aeq,15min}$		
	Day	Evening	Night
Receiver R1	30 + 5 = 35	30 + 5 = 35	30 + 5 = 35

Notes: 1. Intrusiveness criteria only applicable for residential receivers

5.1.2 Amenity Criteria

To limit continuing increases in noise levels, the maximum ambient noise level within an area from industrial noise sources should not normally exceed the acceptable noise levels specified in Table 2.1 of the NSW INP, the applicable parts of which are reproduced below.

Nearby noise sensitive receivers consist of residential properties situated in a rural area. Based on the nature of these receivers, the amenity criteria (L_{Aeq}) for rural residential properties will be applied. The applicable amenity noise criteria are presented in the table below.

Table 5.2 – Applicable Amenity Noise Criteria, dB(A)

Type of Receiver	Indicative Noise Amenity Area	Time of Day	Recommended L_{Aeq} Amenity Noise Level	
			Acceptable	Maximum
Residence	Rural	Day	50	55
		Evening	45	50
		Night	40	45

Notes: 1. Day is defined as 7:00am to 6:00pm, Monday to Saturday; 8:00am to 6:00pm Sundays & Public Holidays.
 2. Evening is defined as 6:00pm to 10:00pm, Monday to Sunday & Public Holidays.
 3. Night is defined as 10:00pm to 7:00am, Monday to Saturday; 10:00pm to 8:00am, Sundays & Public Holidays.

Comparing the amenity and the intrusiveness criteria shows that the intrusiveness criteria are more stringent for day, evening and night periods. Compliance with the intrusiveness criteria would result in compliance with the amenity criteria. Therefore, the intrusiveness criteria would be assessed for from herein.

5.1.3 Sleep Disturbance

Noise emanating from the project has been assessed for its potential to disturb sleep. The NSW EPA has made the following policy statement with respect to sleep disturbance:

“Peak noise level events, such as reversing beepers, noise from heavy items being dropped or other high noise level events, have the potential to cause sleep disturbance. The potential for high noise level events at night and effects on sleep should be addressed in noise assessments for both the construction and operational phases of a development. The INP does not specifically address sleep disturbance from high noise level events.

Research on sleep disturbance is reviewed in the NSW Road Noise Policy. This review concluded that the range of results is sufficiently diverse that it was not reasonable to issue new noise criteria for sleep disturbance.

From the research, the EPA recognised that the current sleep disturbance criterion of an LA1, (1 minute) not exceeding the LA90, (15 minute) by more than 15 dB(A) is not ideal. Nevertheless, as there is insufficient evidence to determine what should replace it, the EPA will continue to use it as a guide to identify the likelihood of sleep disturbance. This means that where the criterion is met, sleep disturbance is not likely, but where it is not met, a more detailed analysis is required.

The detailed analysis should cover the maximum noise level or LA1, (1 minute), that is, the extent to which the maximum noise level exceeds the background level and the number of times this happens during the night-time period. Some guidance on possible impact is contained in the review of

research results in the NSW Road Noise Policy. Other factors that may be important in assessing the extent of impacts on sleep include:

- how often high noise events will occur
- time of day (normally between 10pm and 7am)
- whether there are times of day when there is a clear change in the noise environment (such as during early morning shoulder periods).

The LA1, (1 minute) descriptor is meant to represent a maximum noise level measured under 'fast' time response. The EPA will accept analysis based on either LA1, (1 minute) or LA, (Max).

Source: <http://www.epa.nsw.gov.au/noise/applicnotesindustnoise.htm> Downloaded: 04.12.2015"

The NSW EPA confirm that a sleep disturbance criterion of $L_{A1(1min)} \leq L_{A90(15min)} + 15dB(A)$, should only be used as a first step guide and where the criteria is not met, more detailed analysis is required as explained in the text above. The L_{Amax} descriptor may be used as an alternative to the $L_{A1(1min)}$ descriptor.

It is noted that the subject site will potentially operate for part of the night time period (prior to 7am) when there is sunlight, during the summer months.

Therefore, the sleep disturbance criteria for the project are presented in Table 5.3.

Table 5.3 – Sleep Disturbance Criteria, dB(A)

Receiver	Sleep Disturbance Criteria, L_{Amax}
All residential receivers	30 + 15 = 45

5.2 Operational Noise Sources

The proposed solar farm will operate 750,000 solar panels, which would be installed as one of three options; single-axis trackers, north-oriented fixed-tilt or east-west facing fixed-tilt or a combination of these technologies. Of the three options the highest noise generating operation is the single-axis trackers as the tracking systems involve the panels being driven by motors to track the arc of the sun to maximise the solar effect. Therefore, the tracking motors are a potential source of mechanical noise and are included in this assessment. Up to a total of 10,000 NexTracker tracking motors will be employed to drive the 750,000 solar panels and are to be evenly distributed across the solar farm area. The tracking motors would turn no more than five (5) degrees every 15 minutes and would operate no more than one (1) minute out of every 15 minute period.

In addition to the trackers, the site will require the operation of approximately 100 PV boxes or PV skid, each of which would contain an inverter and a transformer. The PV boxes or PV skids will be evenly distributed across the solar farm area.

During operations, it was assumed that two (2) staff member will attend site daily during the day time period to inspect the equipment. It was assumed that the staff members will travel around the subject site in a light vehicle.

Based on the above, the following table lists associated plant and equipment likely to be used for the operation of the proposed solar farm and their corresponding sound power levels.

Table 5.4 – Typical Operational Plant and Equipment & Sound Power Levels

Plant Item	Plant Description	L _{Aeq} Sound Power Levels, dB(A) re. 1pW
1	NexTracker Motor (10,000 in total)	78 (each)
2	PV Skid (100 in total)	94 (each)
3	Light vehicle (2 in total)	88 (each)

The sound power levels for the plant and equipment presented in the above table are provided by the manufacturer, information from past projects and/or information held in our library files.

5.3 'Modifying Factor' Adjustments

Further to the above and in accordance with the INP, where the character of the noise in question is assessed as particularly annoying (ie. if it has an inherently tonal, low frequency, impulsive or intermittent characteristic), then an adjustment of 5dB(A) for each annoyance aspect, up to a total of 10dB(A), is to be added to the predicted value to penalise the noise for its potential increase in annoyance.

Table 4.1 of Chapter 4 of the NSW INP provides definitive procedures for determining whether a penalty or adjustment should be applied from increased annoyance. For the assessment of the solar farm, the noise from the inverters with integrated transformers is considered to be tonal in nature. Therefore, a 5dB(A) penalty has been applied to the predicted noise contributions from the inverters with integrated transformers.

5.4 Operational Noise Assessment

Noise emissions were predicted by modelling the noise sources, receiver locations, topographical features of the intervening area, and possible noise control treatments using CadnaA (version 4.6) noise modelling computer program. The program calculates the contribution of each noise source at each specified receptor point and allows for the prediction of the total noise from a site.

The noise prediction models takes into account:

- Location of noise sources and receiver locations;
- Height of sources and receivers;
- Separation distances between sources and receivers;

- Ground type between sources and receivers (soft); and
- Attenuation from barriers (natural and purpose built).

Furthermore, in accordance with the INP noise predictions were prepared for each of the following meteorological conditions:

1. Calm & isothermal conditions (acoustically neutral) – no wind and no temperature inversion
2. Slight to gentle breeze – 3m/s wind velocity at 10m from ground level between each noise source and each noise receiver (as per INP default wind conditions). Wind direction was based on wind travelling from the source to the receiver.
3. Moderate temperature inversion – applicable for noise predictions during night time periods only

Table 5.5 below presents the predicted noise levels for the worst case scenario based on concurrent operation of all the plant and equipment shown in Table 5.4. The NexTracker motors were time corrected based on their operation of one (1) minute out of a 15 minute period.

Table 5.5 – Predicted $L_{Aeq,15min}$ Operational Noise Levels at Receiver Locations, dB(A)

Receiver Location	Intrusiveness Criteria	Predicted Operational Noise Levels, $L_{Aeq, 15min}$			Comply? (Yes/No)
		Calm & isothermal conditions	Slight to gentle breeze	Moderate temperature inversion ²	
Receiver R1	35 ¹	22	29	29	Yes

Notes: 1. Criterion for day, evening and night periods
2. Applicable for the Night time period only

Based on the predicted operational noise levels presented in the table above, predicted noise levels at the nearest receiver comply with the nominated criteria under all scenarios and meteorological conditions.

Therefore, no further reasonable and feasible noise mitigation measures are required to reduce operational noise impacts.

5.5 Sleep Disturbance Assessment

During the night time period, only mechanical plant will be operating, including the tracking motors and inverters with integrated transformers. Noise emissions from these plant items are considered to be continuous with no potential for high peak noise level events. Therefore, the L_{Amax} noise levels experienced at the identified receivers will be similar to the predicted $L_{Aeq,15min}$ noise levels shown in Table 5.5. It is expected that the L_{Amax} noise levels experienced at the identified receivers will be well below the nominated sleep disturbance criteria of 45 dB(A).

6 Vibration Assessment

Vibration generating activities would occur only during the construction phase of the project. There are no vibration generating activities expected during the operational phase. As the nearest identified receivers are in excess of 100m from the subject site and there are no high vibration producing plant items to be used, structural damage due to vibration is not expected. Assessment for vibration impact on human comfort is assessed in accordance with the SEARs.

6.1 Vibration Criteria

Assessment of potential disturbance from vibration on human occupants of buildings is made in accordance with the EPA's 'Assessing Vibration; a technical guideline' (DECC, 2006). The guideline provides criteria which are based on the British Standard BS 6472-1992 'Evaluation of human exposure to vibration in buildings (1-80Hz)'. Sources of vibration are defined as either 'Continuous', 'Impulsive' or 'Intermittent'. Table 6.1 provides definitions and examples of each type of vibration.

Table 6.1 – Types of Vibration

Type of vibration	Definition	Examples
Continuous vibration	Continues uninterrupted for a defined period (usually throughout the day-time and/or night-time)	Machinery, steady road traffic, continuous construction activity (such as tunnel boring machinery).
Impulsive vibration	A rapid build-up to a peak followed by a damped decay that may or may not involve several cycles of vibration (depending on frequency and damping). It can also consist of a sudden application of several cycles at approximately the same amplitude, providing that the duration is short, typically less than 2 seconds	Infrequent: Activities that create up to 3 distinct vibration events in an assessment period, e.g. occasional dropping of heavy equipment, occasional loading and unloading.
Intermittent vibration	Can be defined as interrupted periods of continuous or repeated periods of impulsive vibration that varies significantly in magnitude	Trains, nearby intermittent construction activity, passing heavy vehicles, forging machines, impact pile driving, jack hammers. Where the number of vibration events in an assessment period is three or fewer, this would be assessed against impulsive vibration criteria.

Source: Assessing Vibration; a technical guideline, Department of Environment & Climate Change, 2006


The vibration criteria are defined as a single weighted root mean square (rms) acceleration source level in each orthogonal axis. Section 2.3 of the guideline states:

"Evidence from research suggests that there are summation effects for vibrations at different frequencies. Therefore, for evaluation of vibration in relation to annoyance and comfort, overall weighted rms acceleration values of the vibration in each orthogonal axis are preferred (BS 6472)."

When applying the criteria, it is important to note that the three directional axes are referenced to the human body, i.e. x-axis (back to chest), y-axis (right side to left side) or z-axis (foot to head). Vibration may enter the body along different orthogonal axes and affect it in different ways. Therefore,

application of the criteria requires consideration of the position of the people being assessed, as illustrated in Figure 2. For example, vibration measured in the horizontal plane is compared with x- and y-axis criteria if the concern is for people in an upright position, or with the y- and z- axis criteria if the concern is for people in the lateral position.

Figure 2 – Orthogonal Axes for Human Exposure to Vibration

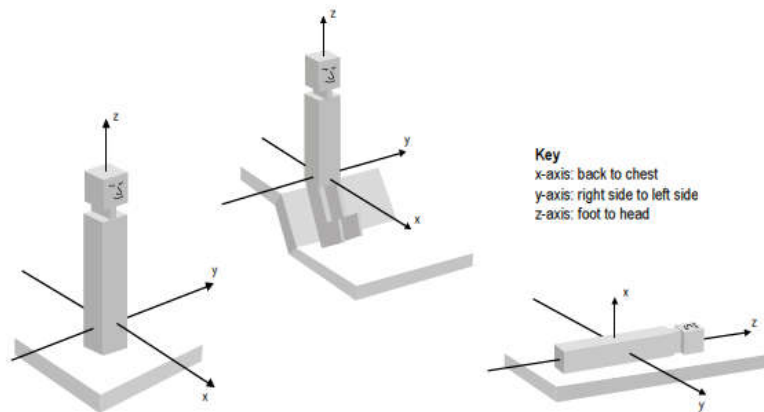

The preferred and maximum values for continuous and impulsive vibration are defined in Table 2.2 of the guideline and are reproduced in Table 6.2 for the applicable receivers.

Table 6.2 – Preferred and Maximum Levels for Human Comfort

Location	Assessment period ^[1]	Preferred values		Maximum values	
		z-axis	x- and y-axis	z-axis	x- and y-axis
Continuous vibration (weighted RMS acceleration, m/s², 1-80Hz)					
Residences	Daytime	0.010	0.0071	0.020	0.014
	Night-time	0.007	0.005	0.014	0.010
Impulsive vibration (weighted RMS acceleration, m/s², 1-80Hz)					
Residences	Daytime	0.30	0.21	0.60	0.42
	Night-time	0.10	0.071	0.20	0.14

Notes: 1. Daytime is 7:00am to 10:00pm and Night-time is 10:00pm to 7:00am

The acceptable vibration dose values (VDV) for intermittent vibration are defined in Table 2.4 of the guideline and are reproduced in Table 6.3 for the applicable receiver type.

Table 6.3 – Acceptable Vibration Dose Values for Intermittent Vibration (m/s^{1.75})

Location	Daytime ¹		Night-time ¹	
	Preferred value	Maximum value	Preferred value	Maximum value
Residences	0.20	0.40	0.13	0.26

Notes: 1. Daytime is 7:00am to 10:00pm and Night-time is 10:00pm to 7:00am

6.2 Potential Vibration Impacts

Based on the proposed plant items presented in Table 4.3, vibration generated by construction plant was estimated and potential vibration impacts are summarised in Table 6.4 below. The assessment is relevant to the identified receiver locations.

Table 6.4 – Potential Vibration Impacts for Identified Receivers

Receiver location	Approx. distance to nearest buildings from works	Type of nearest sensitive buildings	Assessment on potential vibration impacts	Vibration monitoring
Receiver R1	1,750m	Residential	Very low risk of adverse comments	Not required

The potential for adverse comments to vibration impacts during the construction works was determined to be very low. Therefore, additional vibration mitigation measures and vibration monitoring are not required at the identified receiver location.

7 Road Traffic Noise Assessment

Noise impact from the potential increase in traffic on the surrounding road network due to construction and operational activities is assessed against the NSW 'Road Noise Policy' (RNP). The RNP sets out criteria to be applied to particular types of road and land uses. These noise criteria are to be applied when assessing noise impact and determining mitigation measures for sensitive receivers that are potentially affected by road traffic noise associated with the construction and operation of the subject site, with the aim of preserving the amenity appropriate to the land use.

Vehicle access to the subject site will be via an existing access track joining onto Yanga Way at the south-eastern corner of the site. The client has advised that during the construction stage up to 30 trucks per day will access the site, which translates to 60 truck movements (30 in, 30 out) per day. During the operational stage, vehicle access to the site will be maintenance vans and delivery trucks (for large faulty items) which would occur on an irregular basis.

7.1 Road Traffic Noise Criteria

Based on functionality, Yanga Way is categorised as an arterial road. For existing residences affected by additional traffic on existing arterial roads generated by land use developments, the following RNP road traffic noise criteria apply.

Table 7.1 – RNP Road Traffic Noise Criteria, dB(A)

Road Category	Type of project/land use	Assessment Criteria, dB(A)	
		Day 7am – 10pm	Night 10pm – 7am
Freeway/arterial/sub-arterial roads	3. Existing residences affected by additional traffic on existing freeways/arterial/sub-arterial roads generated by land use developments	L _{Aeq,(15 hour)} 60 (external)	L _{Aeq,(9 hour)} 55 (external)

7.2 Predicted Road Traffic Noise

As the proposed vehicle access to the subject site is much greater during the construction stage than the operational stage, road traffic noise assessment is only considered for the construction stage. Compliance during the construction stage would result in compliance during the operational stage. Therefore, operational traffic will not be considered further from herein.

As discussed previously, 60 truck movements per day will occur along the surrounding road network during the construction stage. Truck movements will only occur during the day time period when construction works occur.

Results of the road traffic noise predictions are presented in the table below. It is noted that the predicted noise levels represent the traffic noise contribution from the truck movements associated with the construction works and does not take into account existing traffic noise levels due to existing general traffic flows.

Table 7.2 – Predicted Road Traffic Noise Contribution Levels Along Public Roads, dB(A) $L_{Aeq}(15 \text{ Hour})$

Receiver	Criteria	Truck Traffic Movements	Speed (km/h) ¹	Distance to Road ²	Predicted Noise Level	Exceed?
Residences on Yanga Way	$L_{Aeq, (15 \text{ hour})}$ 60	60 per day	100	20m	51	No

Notes: 1. Based on posted speed limit
 2. Based on closest distance from facade of dwelling to the road

From the above table it can be seen that road traffic noise level contributions from the truck movements associated with the construction works are at least 9dB(A) below the applicable noise criterion based on dwellings being 20m from the road. Given that residences are located within a rural environment, distances between the road and the dwellings would likely be significantly greater than 20m.

Therefore, traffic noise levels as a result of the construction works for the solar farm would not adversely contribute to the existing traffic noise levels at the most affected residences along the surrounding roads.

8 Conclusion

Renzo Tonin and Associates has completed an environmental noise and vibration assessment of the proposed Sunraysia Solar Farm.

Noise emissions from both the construction and operational phase of the project were predicted to comply with the nominated criteria at the nearest affected receiver.

Given the large separation distance between the nearest affected receiver and the subject site, vibration impacts resulting in structural damage to buildings at the nearest affected receiver are determined to be negligible and there is low risk of adverse comments relating to vibration impacts.

Road traffic noise impacts on residential properties along the access route were found to comply with the relevant RNP criteria.

APPENDIX A Glossary of Terminology

The following is a brief description of the technical terms used to describe noise to assist in understanding the technical issues presented.

Adverse weather	Weather effects that enhance noise (that is, wind and temperature inversions) that occur at a site for a significant period of time (that is, wind occurring more than 30% of the time in any assessment period in any season and/or temperature inversions occurring more than 30% of the nights in winter).
Ambient noise	The all-encompassing noise associated within a given environment at a given time, usually composed of sound from all sources near and far.
Assessment period	The period in a day over which assessments are made.
Assessment point	A point at which noise measurements are taken or estimated. A point at which noise measurements are taken or estimated.
Background noise	Background noise is the term used to describe the underlying level of noise present in the ambient noise, measured in the absence of the noise under investigation, when extraneous noise is removed. It is described as the average of the minimum noise levels measured on a sound level meter and is measured statistically as the A-weighted noise level exceeded for ninety percent of a sample period. This is represented as the L90 noise level (see below).
Decibel [dB]	The units that sound is measured in. The following are examples of the decibel readings of every day sounds: 0dB The faintest sound we can hear 30dB A quiet library or in a quiet location in the country 45dB Typical office space. Ambience in the city at night 60dB CBD mall at lunch time 70dB The sound of a car passing on the street 80dB Loud music played at home 90dB The sound of a truck passing on the street 100dB The sound of a rock band 115dB Limit of sound permitted in industry 120dB Deafening
dB(A)	A-weighted decibels. The A-weighting noise filter simulates the response of the human ear at relatively low levels, where the ear is not as effective in hearing low frequency sounds as it is in hearing high frequency sounds. That is, low frequency sounds of the same dB level are not heard as loud as high frequency sounds. The sound level meter replicates the human response of the ear by using an electronic filter which is called the "A" filter. A sound level measured with this filter switched on is denoted as dB(A). Practically all noise is measured using the A filter.
dB(C)	C-weighted decibels. The C-weighting noise filter simulates the response of the human ear at relatively high levels, where the human ear is nearly equally effective at hearing from mid-low frequency (63Hz) to mid-high frequency (4kHz), but is less effective outside these frequencies.
Frequency	Frequency is synonymous to pitch. Sounds have a pitch which is peculiar to the nature of the sound generator. For example, the sound of a tiny bell has a high pitch and the sound of a bass drum has a low pitch. Frequency or pitch can be measured on a scale in units of Hertz or Hz.
Impulsive noise	Having a high peak of short duration or a sequence of such peaks. A sequence of impulses in rapid succession is termed repetitive impulsive noise.
Intermittent noise	The level suddenly drops to that of the background noise several times during the period of observation. The time during which the noise remains at levels different from that of the ambient is one second or more.
L _{Max}	The maximum sound pressure level measured over a given period.
L _{Min}	The minimum sound pressure level measured over a given period.

L ₁	The sound pressure level that is exceeded for 1% of the time for which the given sound is measured.
L ₁₀	The sound pressure level that is exceeded for 10% of the time for which the given sound is measured.
L ₉₀	The level of noise exceeded for 90% of the time. The bottom 10% of the sample is the L ₉₀ noise level expressed in units of dB(A).
L _{eq}	The "equivalent noise level" is the summation of noise events and integrated over a selected period of time.
Reflection	Sound wave changed in direction of propagation due to a solid object obscuring its path.
SEL	Sound Exposure Level (SEL) is the constant sound level which, if maintained for a period of 1 second would have the same acoustic energy as the measured noise event. SEL noise measurements are useful as they can be converted to obtain Leq sound levels over any period of time and can be used for predicting noise at various locations.
Sound	A fluctuation of air pressure which is propagated as a wave through air.
Sound absorption	The ability of a material to absorb sound energy through its conversion into thermal energy.
Sound level meter	An instrument consisting of a microphone, amplifier and indicating device, having a declared performance and designed to measure sound pressure levels.
Sound pressure level	The level of noise, usually expressed in decibels, as measured by a standard sound level meter with a microphone.
Sound power level	Ten times the logarithm to the base 10 of the ratio of the sound power of the source to the reference sound power.
Tonal noise	Containing a prominent frequency and characterised by a definite pitch.

APPENDIX B Long-Term Noise Monitoring Methodology

B.1 Noise Monitoring Equipment

A long-term unattended noise monitor consists of a sound level meter housed inside a weather resistant enclosure. Noise levels are monitored continuously with statistical data stored in memory for every 15-minute period.

Long term noise monitoring was conducted using the following instrumentation:

Description	Type	Octave band data	Logger location(s)
RTA04 (CESVA SC310)	Type 1	1/1	L1

Notes: All meters comply with AS IEC 61672.1 2004 "Electroacoustics - Sound Level Meters" and designated either Type 1 or Type 2 as per table, and are suitable for field use.

The equipment was calibrated prior and subsequent to the measurement period using a Bruel & Kjaer Type 4231 calibrator. No significant drift in calibration was observed.

B.2 Meteorology During Monitoring

Measurements affected by extraneous noise, wind (greater than 5m/s) or rain were excluded from the recorded data in accordance with the NSW INP. Determination of extraneous meteorological conditions was based on data provided by the Bureau of Meteorology (BOM), for a location considered representative of the noise monitoring location(s). However, the data was adjusted to account for the height difference between the BOM weather station, where wind speed and direction is recorded at a height of 10m above ground level, and the microphone location, which is typically 1.5m above ground level (and less than 3m). The correction factor applied to the data is based on Table C.1 of ISO 4354:2009 '*Wind actions on structures*'.

B.3 Noise vs Time Graphs


Noise almost always varies with time. Noise environments can be described using various descriptors to show how a noise ranges about a level. In this report, noise values measured or referred to include the L_{10} , L_{90} , and L_{eq} levels. The statistical descriptors L_{10} and L_{90} measure the noise level exceeded for 10% and 90% of the sample measurement time. The L_{eq} level is the equivalent continuous noise level or the level averaged on an equal energy basis. Measurement sample periods are usually ten to fifteen minutes. The Noise -vs- Time graphs representing measured noise levels, as presented in this report, illustrate these concepts for the broadband dB(A) results.

APPENDIX C Long Term Noise Monitoring Results

Unattended Noise Monitoring Results

Balranald Solar Farm

Tuesday, 11 October 2016

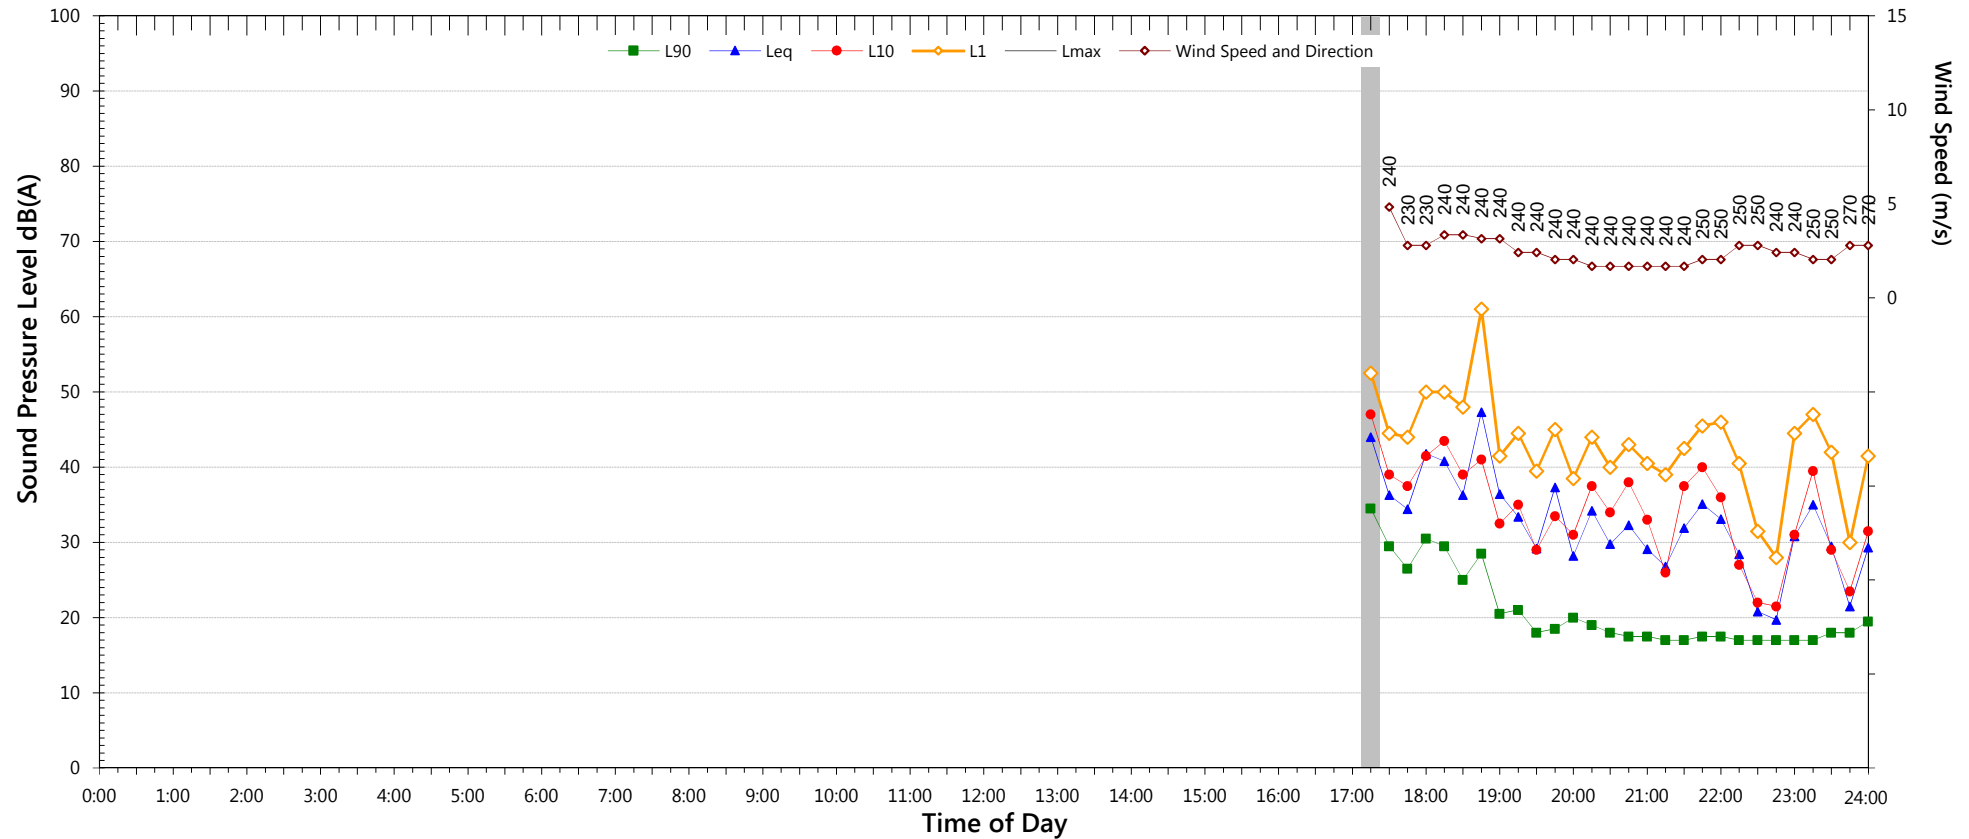

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4 5}
L ₉₀	26.5	17.0	17.0
LA _{eq}	38.7	37.8	31.4

Night Time Maximum Noise Levels (see note 7)			
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

Notes:


- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am till 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	40.5	33.9
L _{eq} 1hr upper 10 percentile	45.2	37.9
L _{eq} 1hr lower 10 percentile	34.3	27.2

Unattended Noise Monitoring Results

Balranald Solar Farm

Wednesday, 12 October 2016

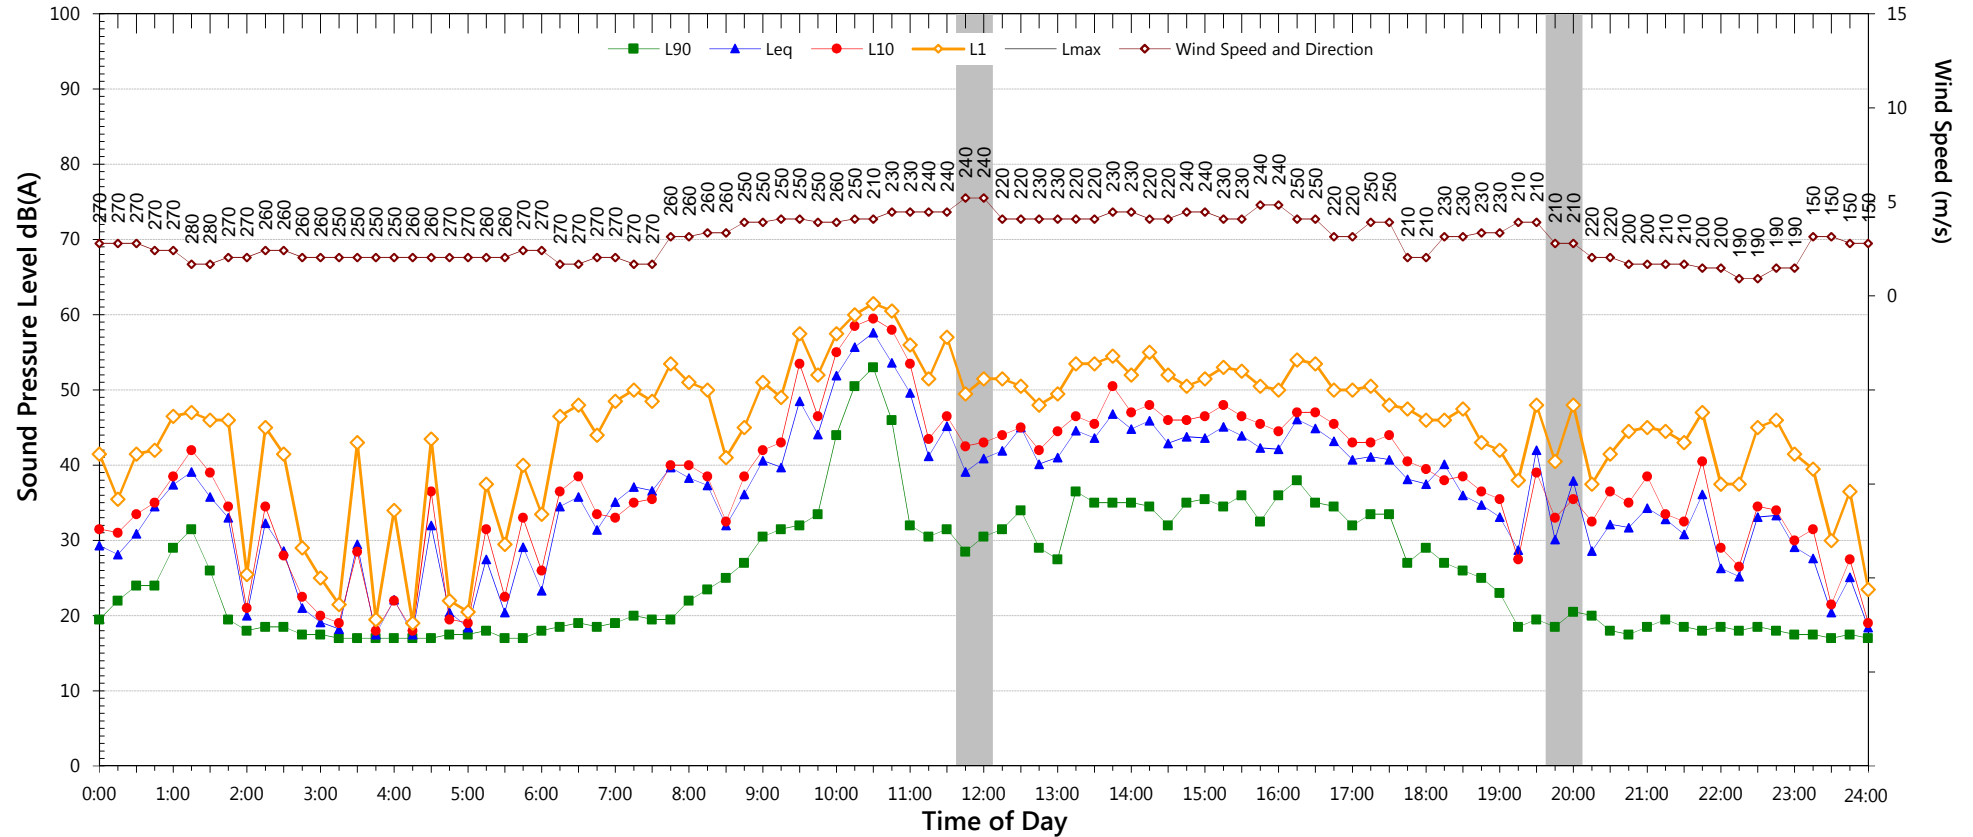

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	23.5	18.0	17.0
LAeq	47.1	35.5	34.1

Night Time Maximum Noise Levels (see note 7)			
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

Notes:


- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am till 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	48.5	36.6
L _{eq} 1hr upper 10 percentile	55.3	42.3
L _{eq} 1hr lower 10 percentile	35.0	26.8

Unattended Noise Monitoring Results

Balranald Solar Farm

Thursday, 13 October 2016

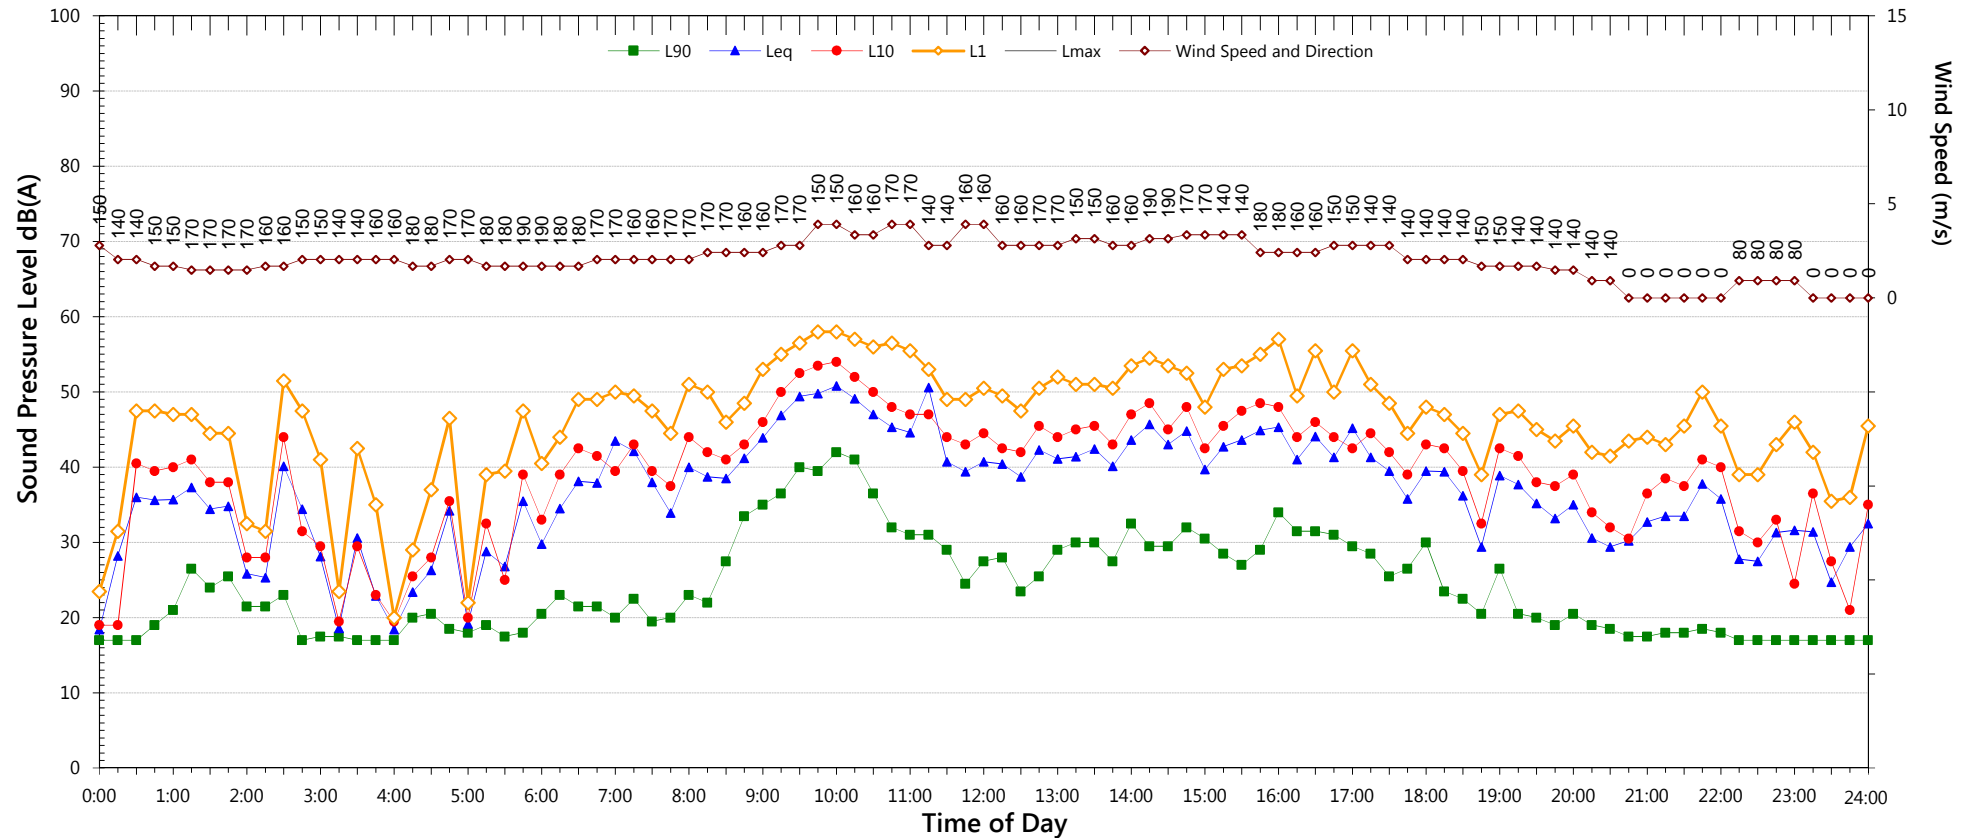

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	23.0	17.5	16.5
LA _{eq}	44.4	35.4	36.6

Night Time Maximum Noise Levels (see note 7)			
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

Notes:


- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am till 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	45.8	39.1
L _{eq} 1hr upper 10 percentile	50.8	47.1
L _{eq} 1hr lower 10 percentile	36.3	31.9

Unattended Noise Monitoring Results

Balranald Solar Farm

Friday, 14 October 2016

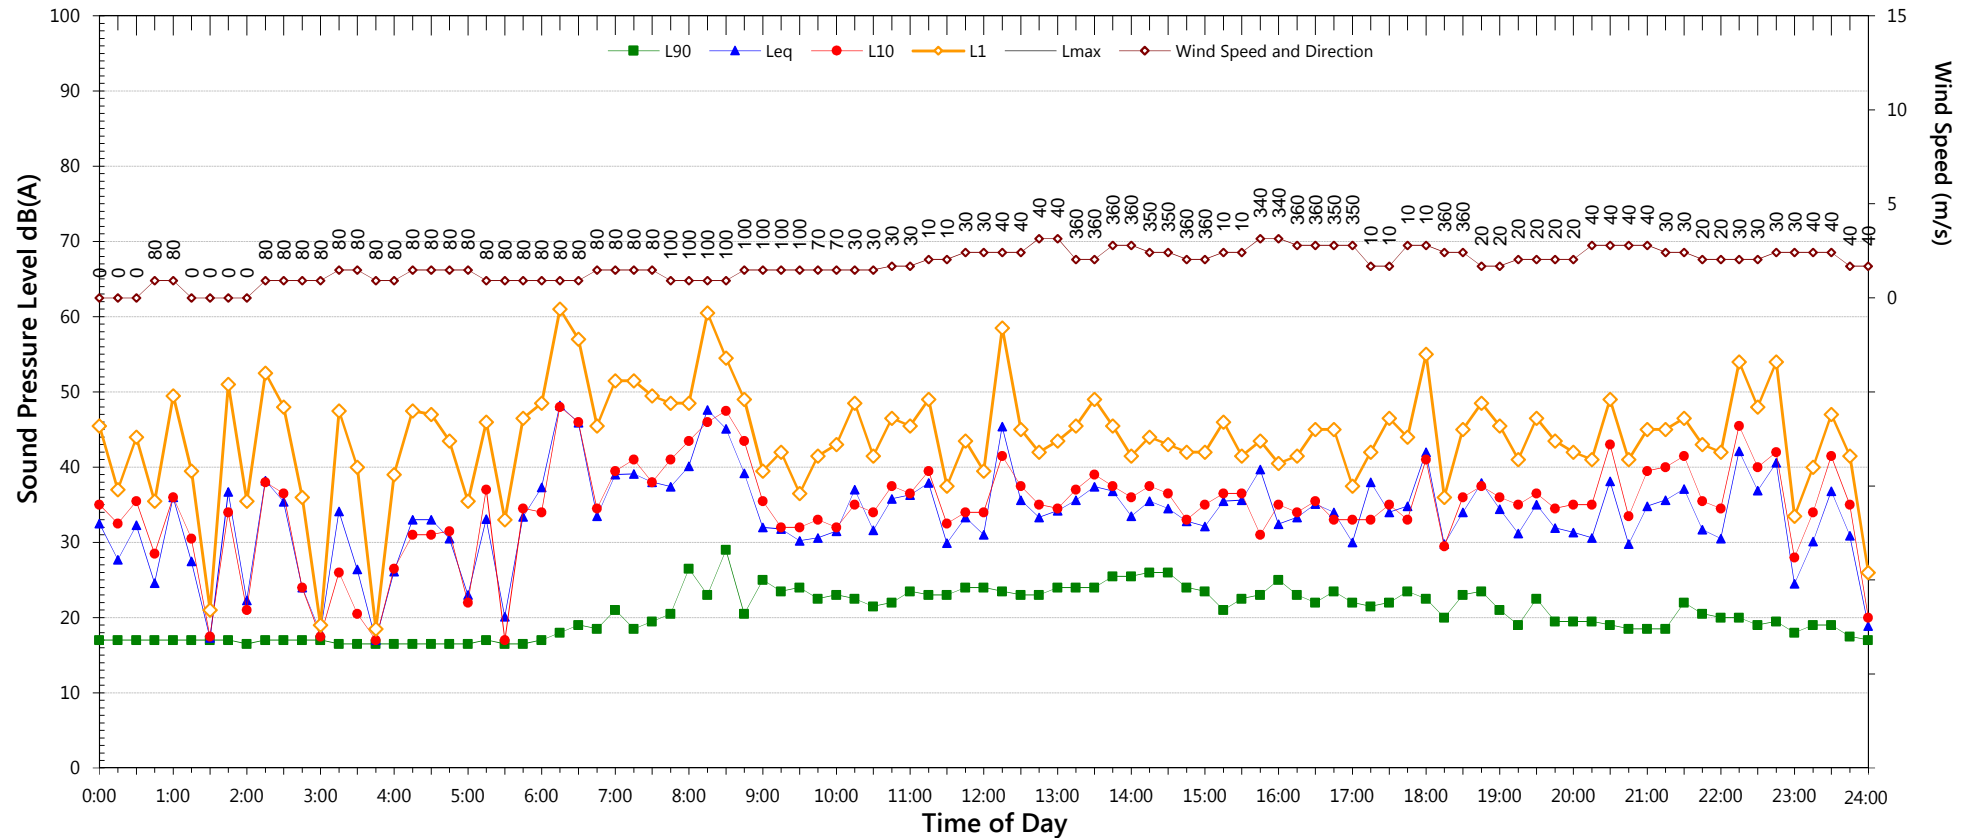

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	21.0	18.5	17.0
LA _{eq}	38.1	34.3	38.7

Night Time Maximum Noise Levels (see note 7)			
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	39.9	41.2
L _{eq} 1hr upper 10 percentile	45.0	49.1
L _{eq} 1hr lower 10 percentile	34.4	30.7


Notes:

- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am till 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

Unattended Noise Monitoring Results

Balranald Solar Farm

Saturday, 15 October 2016

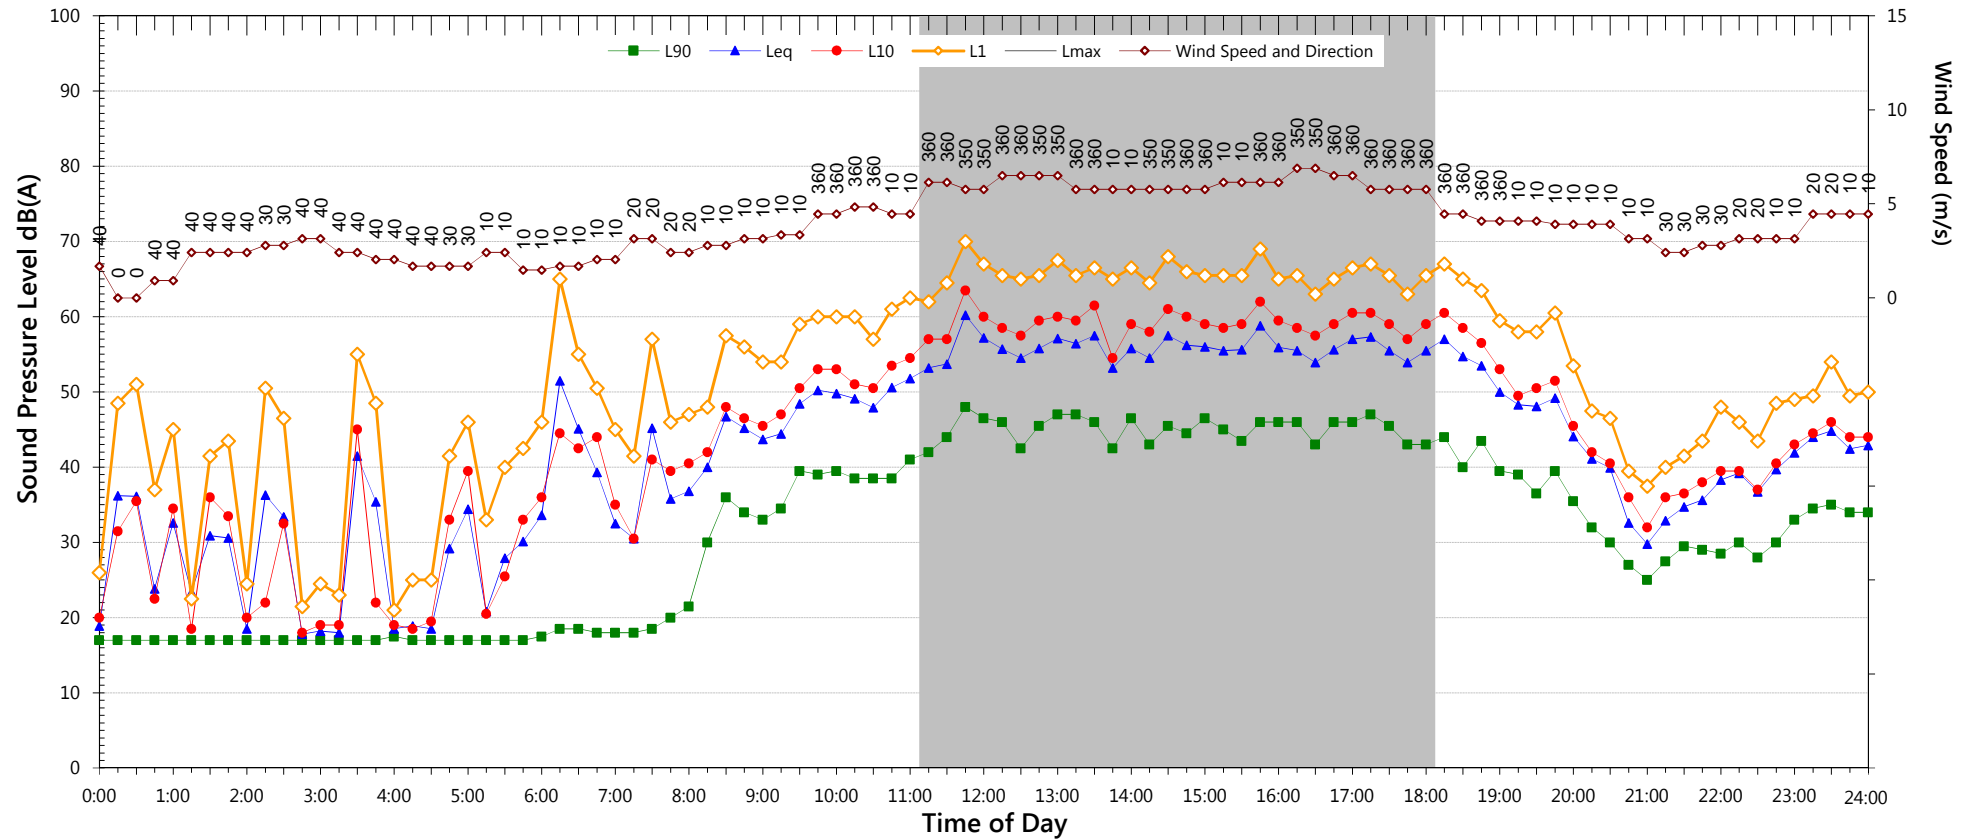

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	18.5	27.0	30.0
LA _{eq}	47.3	49.4	45.9

Night Time Maximum Noise Levels (see note 7)			
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	51.0	47.4
L _{eq} 1hr upper 10 percentile	57.0	50.5
L _{eq} 1hr lower 10 percentile	38.3	42.3


Notes:

- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am til 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

Unattended Noise Monitoring Results

Balranald Solar Farm

Sunday, 16 October 2016

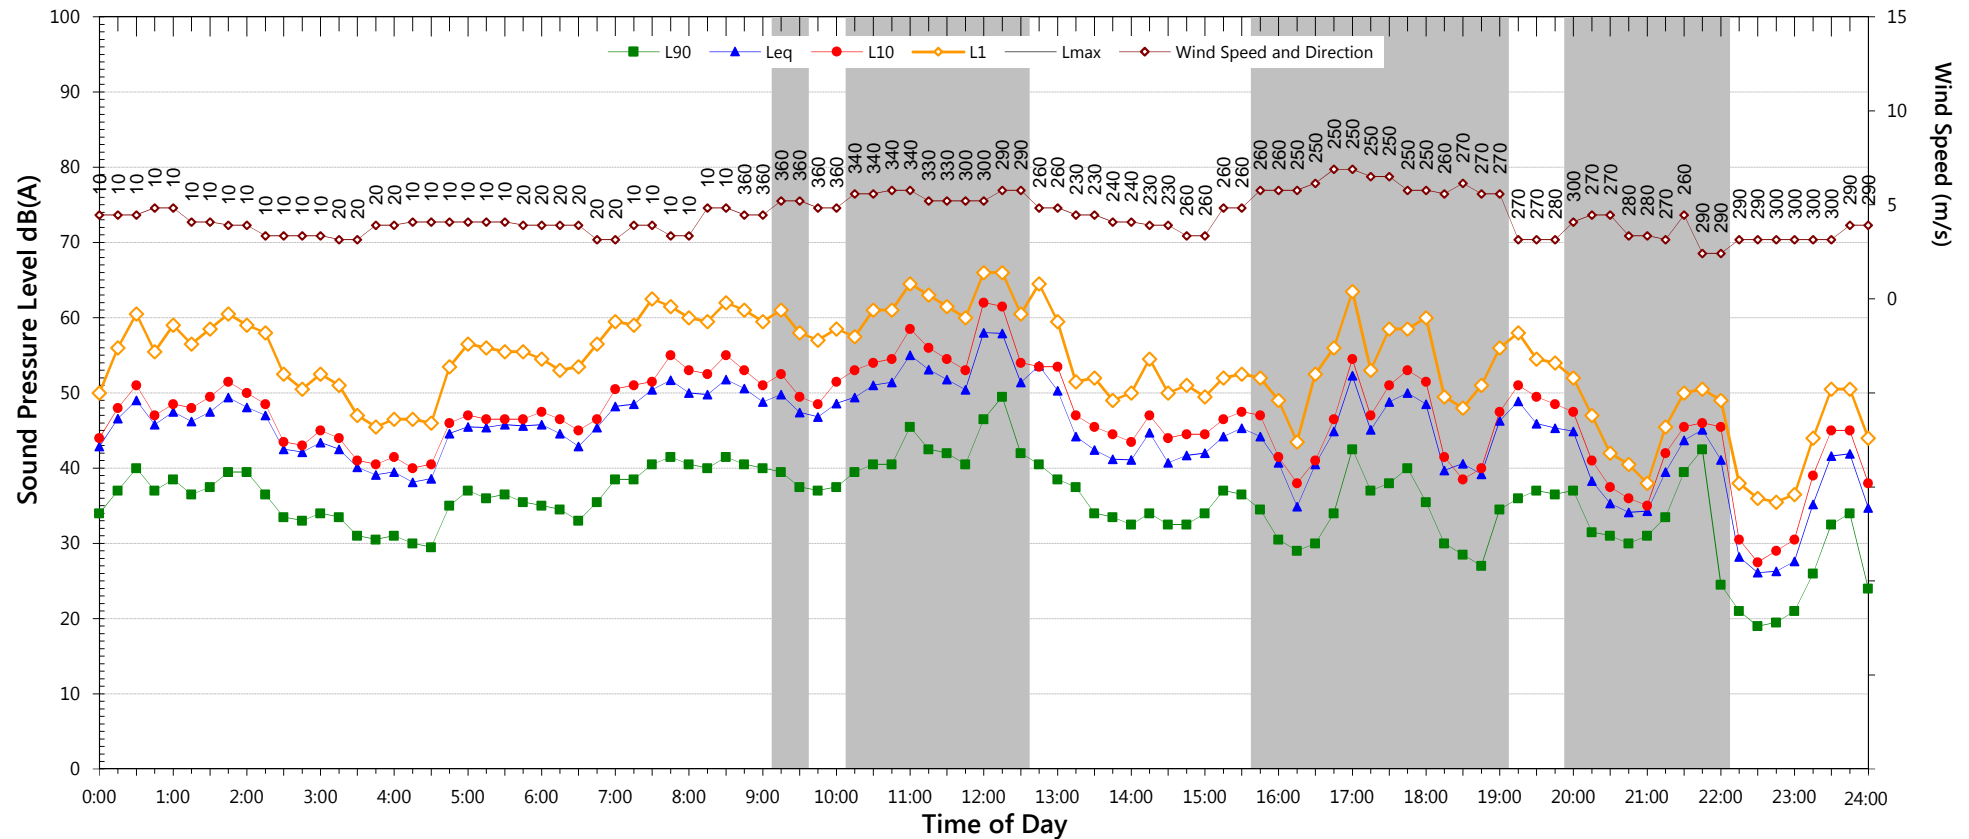

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	32.5	36.0	20.0
LA _{eq}	47.8	47.0	39.1

Night Time Maximum Noise Levels (see note 7)			
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

Notes:


- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am till 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	50.8	41.6
L _{eq} 1hr upper 10 percentile	54.8	49.4
L _{eq} 1hr lower 10 percentile	44.9	28.2

Unattended Noise Monitoring Results

Balranald Solar Farm

Monday, 17 October 2016

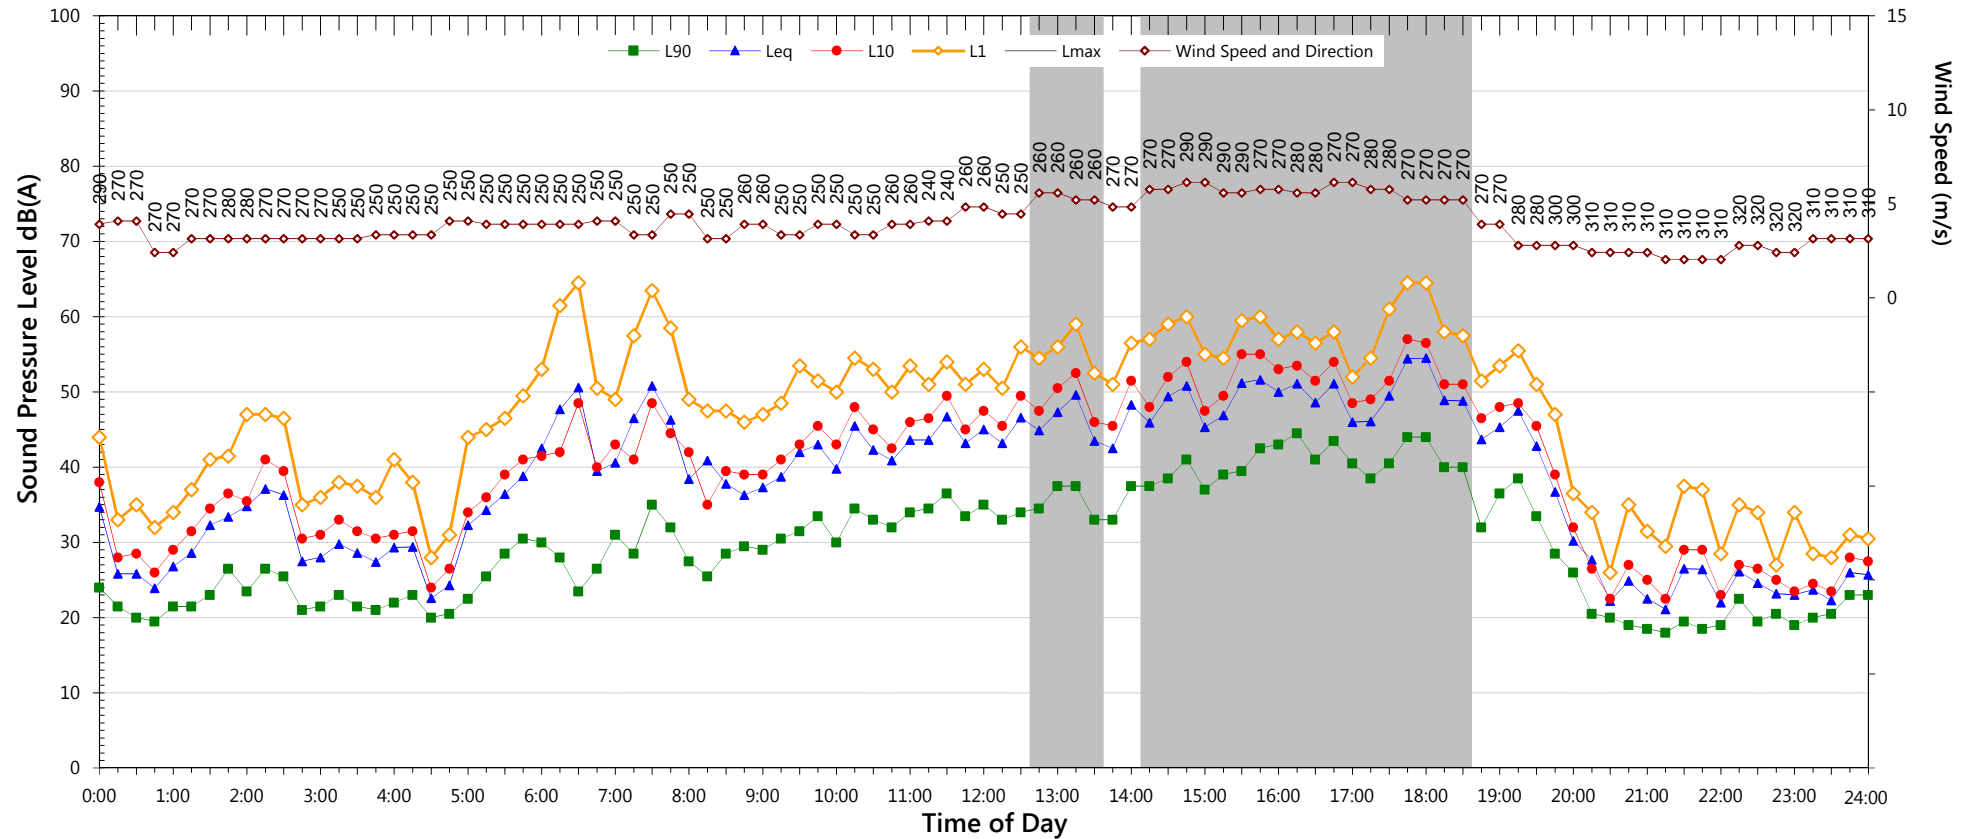

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4 5}
L ₉₀	28.5	18.5	17.5
LA _{eq}	44.4	40.0	31.3

Night Time Maximum Noise Levels		(see note 7)	
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	45.7	33.8
L _{eq} 1hr upper 10 percentile	49.7	40.6
L _{eq} 1hr lower 10 percentile	27.2	22.6


Notes:

- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am til 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

Unattended Noise Monitoring Results

Balranald Solar Farm

Tuesday, 18 October 2016

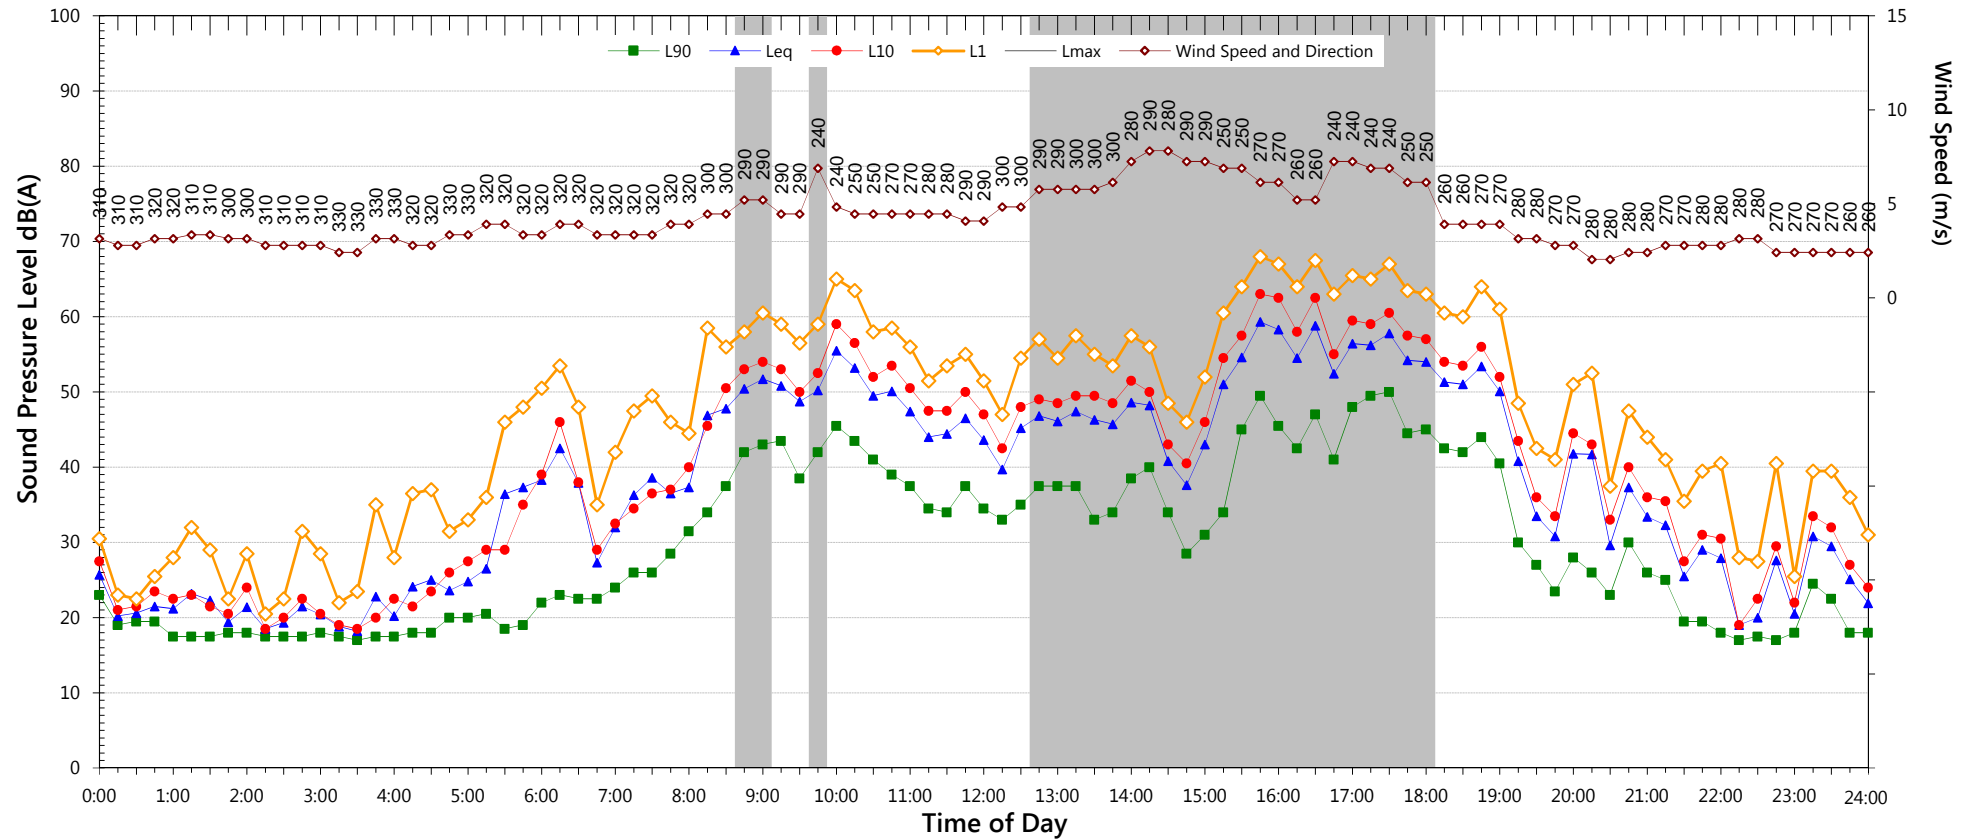

NSW Industrial Noise Policy (Free Field)

Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	26.0	19.5	16.5
LA _{eq}	48.3	46.0	35.0

Night Time Maximum Noise Levels (see note 7)

L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

Notes:

- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am till 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)


NSW Road Noise Policy (1m from facade) (see note 6)

Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	49.9	37.5
L _{eq} 1hr upper 10 percentile	55.1	45.8
L _{eq} 1hr lower 10 percentile	31.9	25.5

Unattended Noise Monitoring Results

Balranald Solar Farm

Wednesday, 19 October 2016

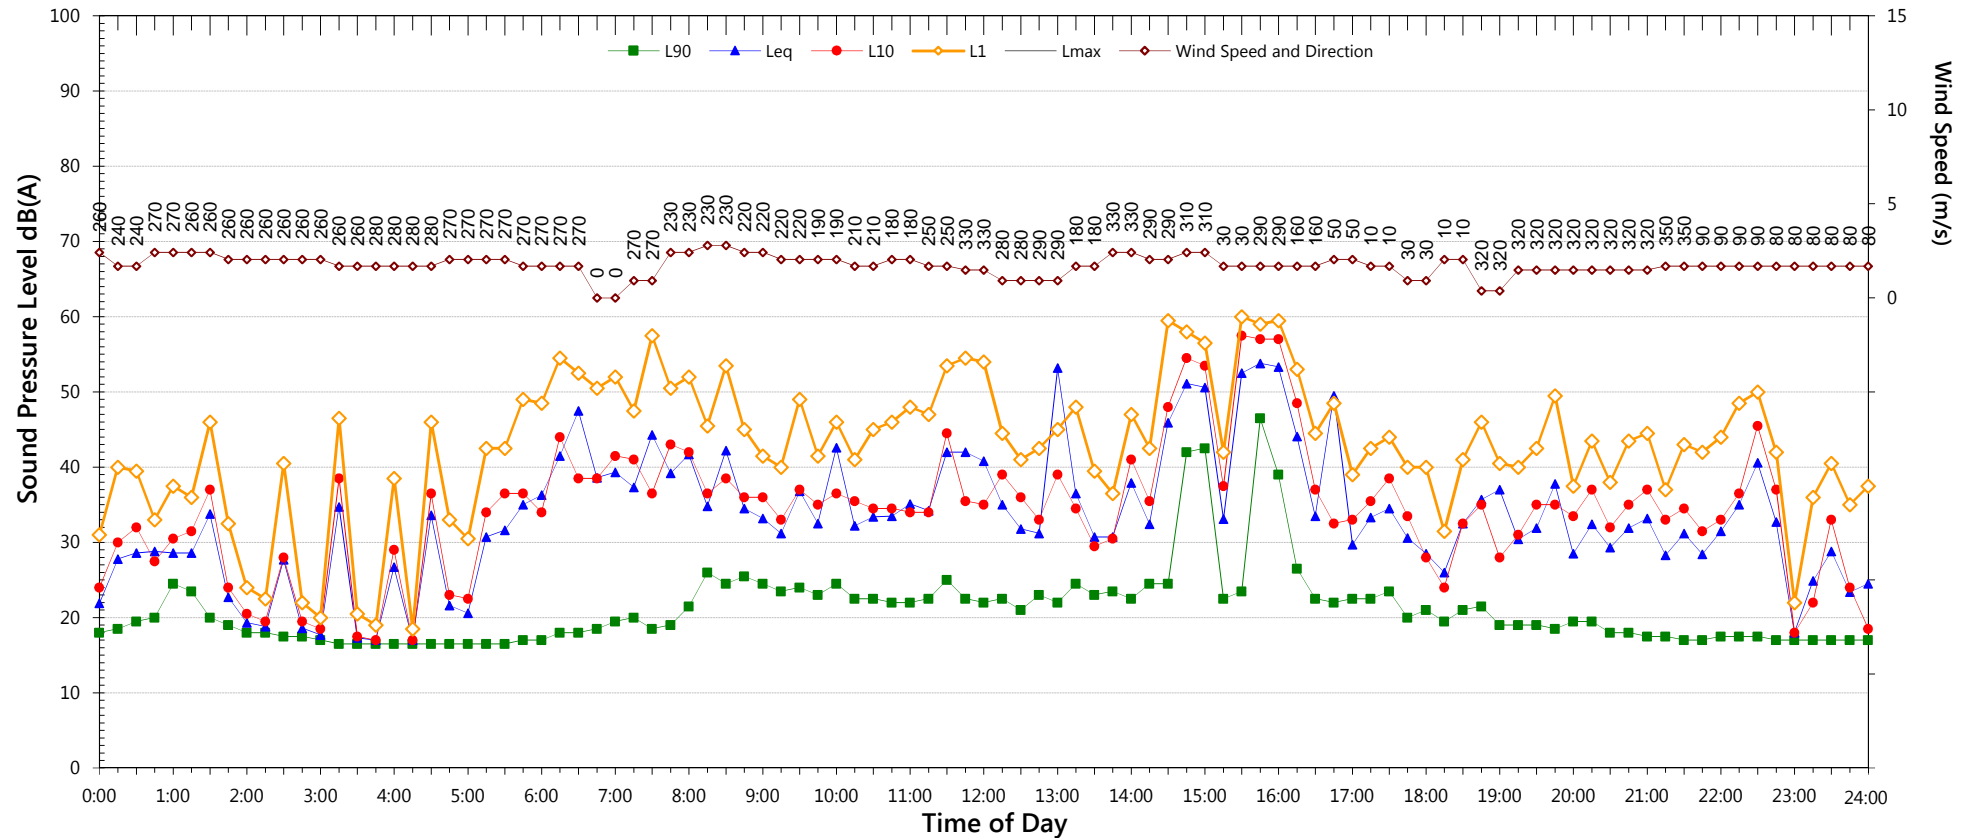

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	21.0	17.0	17.0
LA _{eq}	45.1	32.8	45.1

Night Time Maximum Noise Levels			(see note 7)
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

Notes:


- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am till 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	46.4	47.6
L _{eq} 1hr upper 10 percentile	53.1	56.2
L _{eq} 1hr lower 10 percentile	33.6	28.4

Unattended Noise Monitoring Results

Balranald Solar Farm

Thursday, 20 October 2016

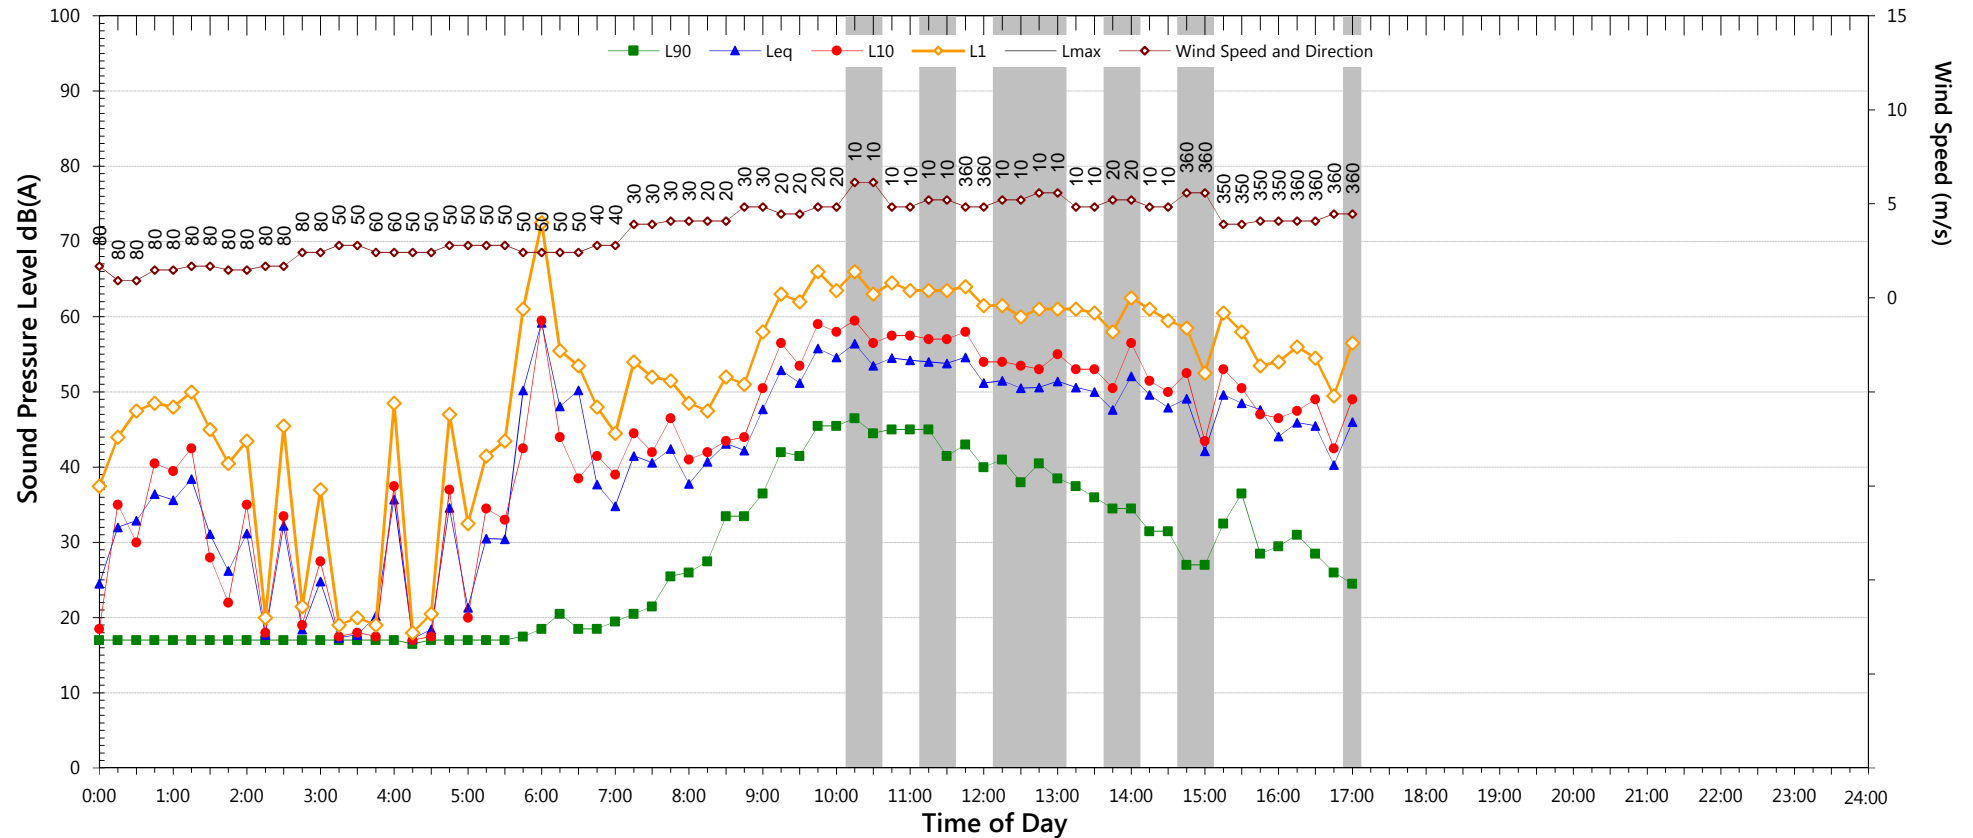

NSW Industrial Noise Policy (Free Field)			
Descriptor	Day ²	Evening ³	Night ^{4,5}
L ₉₀	25.5	-	-
LA _{eq}	50.2	-	-

Night Time Maximum Noise Levels (see note 7)			
L _{Max} (Range)	-	to	-
L _{Max} - L _{eq} (Range)	-	to	-

Notes:

- Shaded periods denote measurements adversely affected by rain, wind or extraneous noise - data in these periods are excluded from calculations.
- "Day" is the period from 8am till 6pm on Sundays and 7am til 6pm on other days
- "Evening" is the period from 6pm till 10pm
- "Night" relates to the remaining periods
- "Night" relates to period from 10pm on this graph to morning on the following graph.
- Graphed data measured in free-field; tabulated results facade corrected
- Night time L_{Max} values are shown only where L_{Max} > 65dB(A) and where L_{Max} - L_{eq} ≥ 15dB(A)

NSW Road Noise Policy (1m from facade) (see note 6)		
Descriptor	Day	Night ⁵
	7am-10pm	10pm-7am
L _{eq} 15 hr and L _{eq} 9 hr	52.7	-
L _{eq} 1hr upper 10 percentile	56.9	-
L _{eq} 1hr lower 10 percentile	43.4	-