


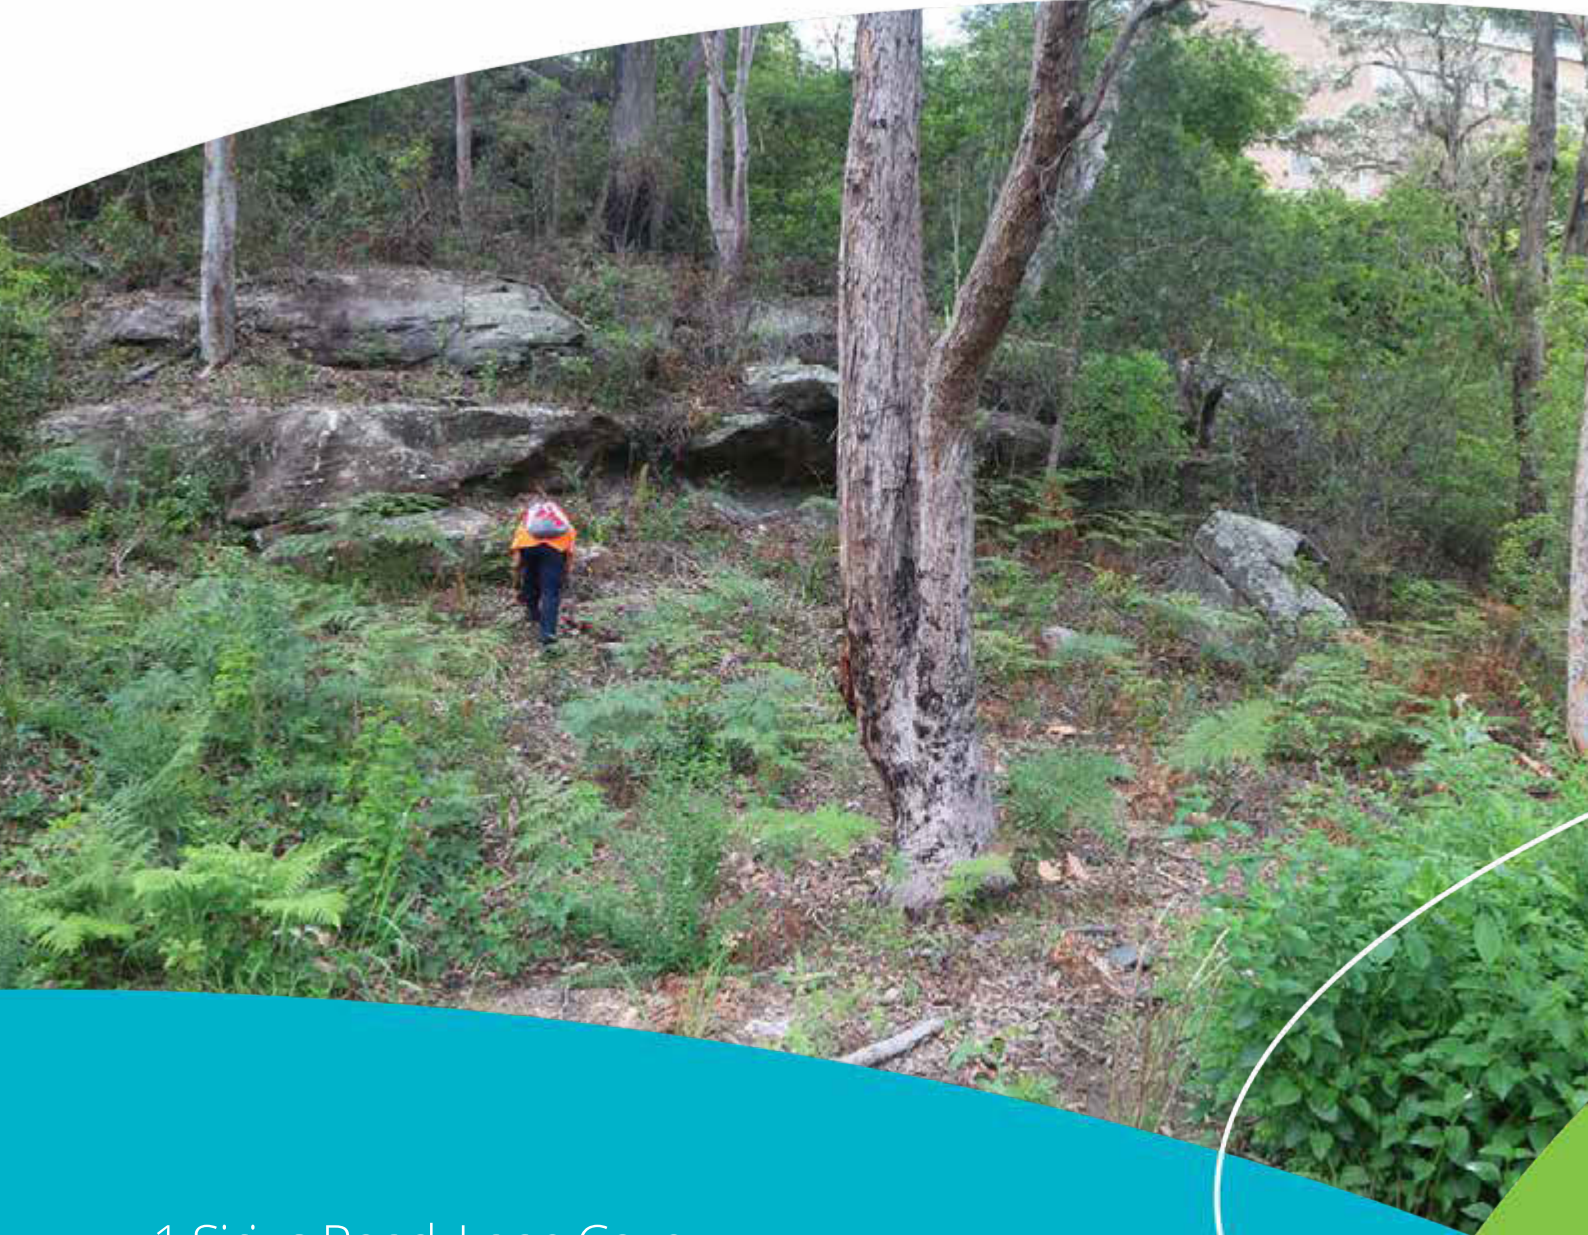

1 Sirius Road, Lane Cove: Aboriginal cultural heritage assessment report

DRAFT REPORT

Prepared for Greenbox Architecture

9 April 2019

Biosis offices

NEW SOUTH WALES

Newcastle

Phone: (02) 4911 4040

Email: newcastle@biosis.com.au

Sydney

Phone: (02) 9101 8700

Email: sydney@biosis.com.au

Wollongong

Phone: (02) 4201 1090

Email: wollongong@biosis.com.au

Albury

Phone: (02) 6069 9200

Email: albury@biosis.com.au

VICTORIA

Melbourne

Phone: (03) 8686 4800

Email: melbourne@biosis.com.au

Ballarat

Phone: (03) 5304 4250

Email: ballarat@biosis.com.au

Wangaratta

Phone: (03) 5718 6900

Email: wangaratta@biosis.com.au

Document information

Report to: Greenbox Architecture

Prepared by: Samantha Keats
Anthea Vella

Biosis project no.: 29387

File name: 29387.Sirius Road.Lane.Cove.ACHA.DFT00.20190205

Citation: Biosis (2019). 1 Sirius Road, Lane Cove: Aboriginal Cultural Heritage Assessment Report. Report for Greenbox Architecture. Authors: A Vella and Initial Surname, Biosis Pty Ltd, Newcastle. Project no. 29387

Document control

Version	Internal reviewer	Date issued
Draft version 01	Taryn Gooley	20/03/2019
Final version 01	To be confirmed	To be confirmed

Acknowledgements

Biosis gratefully acknowledges the contributions of the following people and organisations (listed alphabetically) in preparing this report:

- Client: Greenbox Architecture

Biosis staff involved in this project were:

- James Cole for fieldwork

© Biosis Pty Ltd

This document is and shall remain the property of Biosis Pty Ltd. The document may only be used for the purposes for which it was commissioned and in accordance with the Terms of the Engagement for the commission. Unauthorised use of this document in any form whatsoever is prohibited.

Disclaimer:

Biosis Pty Ltd has completed this assessment in accordance with the relevant federal, state and local legislation and current industry best practice. The company accepts no liability for any damages or loss incurred as a result of reliance placed upon the report content or for any purpose other than that for which it was intended.

Contents

Glossary.....	v
Summary	vi
1 Introduction	1
1.1 Project background	1
1.2 Study area.....	1
1.3 Proposed development.....	1
1.4 Planning approvals	2
1.5 Restricted and confidential information.....	3
1.6 Aboriginal cultural heritage	3
1.6.1 General description	3
1.6.2 Tangible Aboriginal cultural heritage.....	3
1.6.3 Intangible Aboriginal cultural heritage.....	3
1.6.4 Statutory.....	3
1.6.5 Values.....	4
2 Study area context.....	8
2.1 Topography and hydrology	8
2.2 Soil landscapes	9
2.3 Climate and rainfall	11
2.4 Landscape resources	11
2.5 European land use history.....	12
3 Aboriginal cultural heritage context	18
3.1 Ethnohistory.....	18
3.2 Aboriginal heritage located in the study area	18
3.3 Interpretation of past Aboriginal land use	18
4 Aboriginal community consultation	21
4.1 Stage 1: Notification of project proposal and registration of interest	21
4.1.1 Identification of relevant Aboriginal stakeholders.....	21
4.1.2 Public notice	22
4.1.3 Registration of Aboriginal parties	22
4.2 Stage 2: Presentation of information about the proposed project.....	23
4.3 Stage 3: Gathering information about cultural significance.....	23
4.3.1 Archaeological assessment methodology information pack.....	23
4.3.2 Information gathered during fieldwork	23
4.4 Stage 4: Review of draft Aboriginal cultural heritage assessment report.....	23
5 Aboriginal cultural significance assessment.....	24
5.1 Introduction to the assessment process.....	24
5.2 Cultural (social significance) values.....	25

5.3	Historic values.....	26
5.4	Archaeological (scientific significance) values.....	26
5.5	Aesthetic values.....	26
5.6	Statement of significance.....	26
5.6.1	Statement of significance for the study area	26
6	Development limitations and mitigation measures.....	28
6.1	Predicted physical impacts	28
6.2	Management and mitigation measures	28
7	Recommendations	29
	References.....	30
	Appendices	32
Appendix 1	Consultation log	33
Appendix 2	Stage 1: Notification of project proposal and registration of interest	40
Appendix 3	Stage 2: Presentation of information about the proposed project.....	41
Appendix 4	Stage 3: Gathering information about cultural significance	42
Appendix 5	Stage 4: Review of draft cultural heritage assessment report	43
Appendix 6	Archaeological report.....	44

Tables

Table 1	Gymea soil landscape characteristics (Chapman & Murphy 1989, p.65–66).....	10
Table 2	Disturbed Terrain soil landscape characteristics (Chapman & Murphy 1989, pp.132–134)	10
Table 3	Significance assessment criteria.....	26

Figures

Figure 1	Location of the study area.....	5
Figure 2	Study area detail	6
Figure 3	Proposed development.....	7

Plates

Plate 1	Diagram showing Strahler stream order (Ritter et al 1995, p. 151).	9
Plate 2	1833 Crown Plan showing Thomas Moore and Henry O'Briens grants (Source: NSW Land Registry Services, Crown Plan 138.690)	13
Plate 3	1854 Crown Plan showing the three original grants (Source: NSW Land Registry Services, Crown Plan 627.690)	13

Plate 4	Parish Map of Willoughby showing original grants (Source: NSW Land Registry Services, County of Cumberland Parish of Willoughby (sheet 1A)).....	14
Plate 5	Subdivision plan from 1920 showing no development on the study area (Source: Lane Cove Library Local History LHM994.4139/1920/VIC)	15
Plate 6	1943 aerial showing dense vegetation in the majority of the study area and two structures (Source: Land and Property Information).....	16
Plate 7	Current aerial showing cleared land with no structures (Source: Land and Property Information).....	17

DRAFT

Glossary

ACHA	Aboriginal Cultural Heritage Assessment
AHIMS	Aboriginal Heritage Information Management System
CBD	Central Business District
DA	Determining Authority
DECCW	Department of Environment, Climate Change and Water (now OEH)
DP	Deposited Plan
EP&A Act	<i>Environmental Planning and Assessment Act 1979</i>
ICOMOS	International Council on Monuments and Sites
LEP	Local Environmental Plan
LGA	Local Government Area
MLALC	Metropolitan Local Aboriginal Land Council
NNTT	National Native Title Tribunal
NPW Act	<i>National Parks and Wildlife Act 1974</i>
NPWS	National Parks and Wildlife Service
NSW	New South Wales
NTSCORP	Native Title Services Corporation
OEH	NSW Office of Environment and Heritage
Project area	Defined as Lot 1 DP 1151370
RAPs	Registered Aboriginal Parties
SSD	State Significant Development

Summary

Biosis Pty Ltd (Biosis) was commissioned by Greenbox Architecture to undertake an Aboriginal cultural heritage assessment (ACHA) for the proposed development at Lane Cove, New South Wales (NSW) (the study area). The study area is located within Lot 1 DP 1151370 and is approximately 3.5 kilometres west of Lane Cove and approximately 8.5 kilometres north west of the Sydney central business district (CBD).

There are 115 Aboriginal cultural heritage sites registered with the Aboriginal Heritage Information Management System (AHIMS) register within the vicinity of the study area. No sites are located within the study area.

A field investigation of the study area consisting of an archaeological survey was conducted on 20 November 2018. The overall effectiveness of the survey for examining the ground for Aboriginal sites was deemed low. This was attributed to vegetation cover restricting ground surface visibility (GSV) combined with a low amount of exposures.

No previously unrecorded Aboriginal cultural heritage sites were identified during the field survey and no areas of (archaeological) sensitivity identified. Owing to the significant disturbances across the study area, there is no potential for development activities to impact Aboriginal sites or areas of (archaeological) sensitivity.

The project is a State Significant Development (SSD 9741), which will consist of a data storage building, electrical substation, ancillary office area, loading docks, associated infrastructure, car parking, and landscaping.

Consultation

The Aboriginal community was consulted regarding the heritage management of the project throughout its lifespan. Consultation has been undertaken as per the process outlined in the *Aboriginal Cultural Heritage Consultation Requirements for Proponents 2010* (DECCW 2010a) (consultation requirements). The appropriate government bodies were notified and advertisements placed in the *Daily Telegraph* newspaper (30 January 2019), which resulted in 43 Aboriginal organisations registering their interest (see section 4.1.3).

A search conducted by the Office of the Registrar, *Aboriginal Land Rights Act 1983* listed no Aboriginal Owners with land within the study area. A search conducted by the National Native Title Tribunal (NNTT) listed no Registered Native Title Claims, Unregistered Claimant Applications or Registered Indigenous Land Use Agreements within the study area.

Upon registration, the Aboriginal parties were invited to provide their knowledge on the study area and on the proposal provided in the project information and methodology pack. The responses identify the study area as an area of low significance. Responses from the Registered Aboriginal Parties (RAPs) are included in Appendix 3.

Site officers from elected RAPs participated in the field inspection and provided comment on the study area with regard to the proposal. The Metropolitan Local Aboriginal Land Council (MLALC) attended the archaeological survey of the study area. Based on the background assessment, field inspection and discussions held on site with the LALC's Site Officer, the LALC and Biosis have assessed the study area as holding low potential to contain intact Aboriginal sites. A letter was provided by MLALC and is provided in Appendix 4.

The outcome of the consultation process was that the RAPs considered the study area to be highly disturbed and have a low to moderate level of cultural significance, which was associated with the landscape of the Lane Cove River. The results of the consultation process are included in this document.

The recommendations that resulted from the consultation process are provided below.

Results

Key considerations arising from the Aboriginal community consultation process include:

- As described by MLALC, Aboriginal people have used the Lane Cove area in the past as an important place of trade or gatherings.
- The indication of Aboriginal occupations within the vicinity is obvious with the surrounding landscape usage and the significance for Aboriginal people past and present still remains.
- The study area is situated in a landscape known to be utilised by Aboriginal people as is evidenced by the large number of Aboriginal sites recorded in the vicinity. While the study area has been highly disturbed, the cultural landscape remains significant.
- All parts of Sydney hold significance to Aboriginal people and the preservation and conservation of some sites are of high importance for our connection to Country.

Biosis undertook a field survey which identified no Aboriginal heritage sites within the study area.

Management recommendations

Prior to any development impacts occurring within the study area, the following is recommended:

Recommendation 1: No further archaeological assessment is required

No further archaeological work is required in the study area due to the entire study area being assessed as having low archaeological potential.

Recommendation 2: Landscape design to include Indigenous plants

After the completion of the construction of the proposed development, it is suggested that landscapes of native vegetation be planted and Gammerraygal names be used in any visual interpretation or signage within the gardens. This will ensure the visual amenity of the area is retained and the acknowledgement of Aboriginal people as the original custodians of the area are recognised.

Recommendation 3: Discovery of Unanticipated Aboriginal Objects

All Aboriginal objects and Places are protected under the NPW Act. It is an offence to knowingly disturb an Aboriginal site without a consent permit issued by the OEH. Should any Aboriginal objects be encountered during works associated with this proposal, works must cease in the vicinity and the find should not be moved until assessed by a qualified archaeologist. If the find is determined to be an Aboriginal object the archaeologist will provide further recommendations. These may include notifying the OEH and Aboriginal stakeholders.

Recommendation 4: Discovery of Aboriginal Ancestral Remains

Aboriginal ancestral remains may be found in a variety of landscapes in NSW, including middens and sandy or soft sedimentary soils. If any suspected human remains are discovered during any activity you must:

1. Immediately cease all work at that location and not further move or disturb the remains.

2. Notify the NSW Police and OEH's Environmental Line on 131 555 as soon as practicable and provide details of the remains and their location.
3. Not recommence work at that location unless authorised in writing by OEH.

DRAFT

1 Introduction

1.1 Project background

Biosis has been commissioned by Greenbox Architecture to undertake an ACHA for the proposed development at Lane Cove, New South Wales (NSW) (Figure 1). The project is a State Significant Development (SSD 9741), which will consist of a data storage building, electrical substation, ancillary office area, loading docks, associated infrastructure, car parking, and landscaping.

This report details the investigation, consultation and assessment of Aboriginal cultural heritage undertaken for the study area.

1.2 Study area

The study area is located within Lane Cove NSW (Lot 1 DP 1151370) and is approximately 3.5 kilometres west of Lane Cove and approximately 8.5 kilometres north west of the Sydney CBD (Figure 1). It encompasses approximately 4.5 hectares of private land.

The study area is within the:

- Lane Cove Local Government Area (LGA)
- Parish of Willoughby
- County of Cumberland

The study area is bounded by the Lane Cove River to the west, Stringybark Creek to the north, Apollo Place to the south, and Sirius Road to the east Cumberland (Figure 2).

1.3 Proposed development

The project is a State Significant Development (SSD 9741), which will consist of a data storage building, electrical substation, ancillary office area, loading docks, associated infrastructure, car parking and landscaping (Figure 3). The requirements for the SSD are outlined below:

SSD 9741 SEARS for heritage

Key issues	Requirement (specific assessment requirements in addition to the general requirement above)	Where addressed in the report	Current guidelines
Heritage – including an assessment of Aboriginal and non-Aboriginal cultural heritage items and values of the site and surrounding area in accordance	The EIS must identify and describe the Aboriginal cultural heritage values that exist across the whole area that will be affected by the development and document these in an Aboriginal Cultural Heritage Assessment Report (ACHAR). This may include the need for surface survey and test excavation. The identification of cultural heritage values must be conducted in accordance with the Code of Practice for Archaeological	• Section 3 • Section 5	• Guide to investigating, assessing and reporting on Aboriginal Cultural Heritage in NSW (OEH, 2011) • Code of practice for archaeological investigation of Aboriginal objects in NSW (DECCW, 2010)

Key issues	Requirement (specific assessment requirements in addition to the general requirement above)	Where addressed in the report	Current guidelines
with the relevant Office of Environment and Heritage guidelines.	Investigations of Aboriginal Objects in NSW (DECC 2010), and guided by the Guide to investigating, assessing and reporting on Aboriginal Cultural Heritage in NSW (OEH, 2011).		
	Consultation with Aboriginal people must be undertaken and documented in accordance with the Aboriginal cultural heritage consultation requirements for proponents 2010 (DECCW). The significance of cultural heritage values for Aboriginal people who have a cultural association with the land must be documented in the ACHAR.	- Section 4 - Appendix 1 - Aboriginal Cultural Heritage Assessment Report (ACHAR)	Aboriginal Cultural Heritage Consultation requirements for proponents (DECCW, 2010)
	Impacts on Aboriginal cultural heritage values are to be assessed and documented in the ACHAR. The ACHAR must demonstrate attempts to avoid impact upon cultural heritage values and identify any conservation outcomes. Where impacts are unavoidable, the ACHAR must outline measures proposed to mitigate impacts. Any objects recorded as part of the assessment must be documented and notified to OEH.	Section 6	The Burra Charter: the Australia ICOMOS Charter for Places of Cultural Significance (Australia ICOMOS, 2013)
	The ACHAR must outline procedures to be followed if Aboriginal objects are found at any stage of the life of the development/project to formulate appropriate measures to manage unforeseen impacts.	Section 7	- NSW Skeletal Remains: Guidelines for Management of Human Remains (Heritage Office, 1998) - Aboriginal site recording form - Aboriginal Heritage Information Management System

1.4 Planning approvals

The proposed development will be assessed against Part 5 of the *Environmental Planning and Assessment Act 1979* NSW (EP&A Act). Other relevant legislation and planning instruments that will inform this assessment include:

- NPW Act
- *National Parks and Wildlife Amendment Act 2010*

- Lane Cove Local Environmental Plan 2009 (LEP)
- Lane Cove Development Control Plan 2010

1.5 Restricted and confidential information

Appendix 1 in the Archaeological Report contains AHIMS information which is confidential and not to be made public. This is clearly marked on the title page for the Attachment.

1.6 Aboriginal cultural heritage

1.6.1 General description

According to Allen and O'Connell (2003), Aboriginal people have inhabited the Australian continent for the last 50,000 years. New evidence out of the Northern Territory has pushed this date back to around 60,000 years with the Malakanunja II rock shelter dated at 61,000 ± 9000/-13,000 BP (Clarkson et al. 2015). In NSW, according to Bowler et al. (2003), Aboriginal people have occupied the land for over 42,000 years.

Without being part of the Aboriginal culture and the productions of this culture, it is not possible for non-Aboriginal people to fully understand the meaning of site, objects and places to Aboriginal people – only to move closer towards understanding this meaning with the help of the Aboriginal community. Similarly, definitions of Aboriginal culture and cultural heritage without this involvement constitute outsider interpretations.

With this preface Aboriginal cultural heritage broadly refers to things that relate to Aboriginal culture and hold cultural meaning and significance to Aboriginal people (DECCW 2010a, p.3). There is an understanding in Aboriginal culture that everything is interconnected. In essence Aboriginal cultural heritage can be viewed as potentially encompassing any part of the physical and/or mental landscape, that is, 'Country' (DECCW 2010a, p.iii).

Aboriginal people's interpretation of cultural value is based on their 'traditions, observance, lore, customs, beliefs and history' (DECCW 2010a, p.3). The things associated with Aboriginal cultural heritage are continually and actively being defined by Aboriginal people (DECCW 2010a, p.3). These things can be associated with traditional, historical or contemporary Aboriginal culture (DECCW 2010a, p.3).

1.6.2 Tangible Aboriginal cultural heritage

Three categories of tangible Aboriginal cultural heritage may be defined:

- Things that have been observably modified by Aboriginal people.
- Things that may have been modified by Aboriginal people but no discernible traces of that activity remain.
- Things never physically modified by Aboriginal people (but associated with Dreamtime Ancestors who shaped those things).

1.6.3 Intangible Aboriginal cultural heritage

Examples of intangible Aboriginal cultural heritage would include memories of stories and 'ways of doing', which would include language and ceremonies (DECCW 2010a, p.3).

1.6.4 Statutory

Currently Aboriginal cultural heritage, as statutorily defined by the NPW Act, consists of objects and places which are protected under Part 6 of the Act.

Aboriginal objects are defined as:

any deposit, object or material evidence...relating to the Aboriginal habitation of the area that comprises NSW, being habitation before or concurrent with (or both) the occupation of that area by persons of non-Aboriginal extraction, and includes Aboriginal remains

Aboriginal places are defined as a place that is or was of special Aboriginal cultural significance. Places are declared under section 84 of the NPW Act.

1.6.5 Values

Aboriginal cultural heritage is valued by Aboriginal people as it is used to define their identity as both individuals and as part of a group (DECCW 2010a, p.iii). More specifically it is used:

- To provide a:
 - 'connection and sense of belonging to Country' (DECCW 2010a, p.iii)
 - link between the present and the past (DECCW 2010a, p.iii)
- As a learning tool to teach Aboriginal culture to younger Aboriginal generations and the general public (DECCW 2010a, p.3)
- As further evidence of Aboriginal occupation prior to European settlement for people who do not understand the magnitude to which Aboriginal people occupied the continent (DECCW 2010a, p.3).


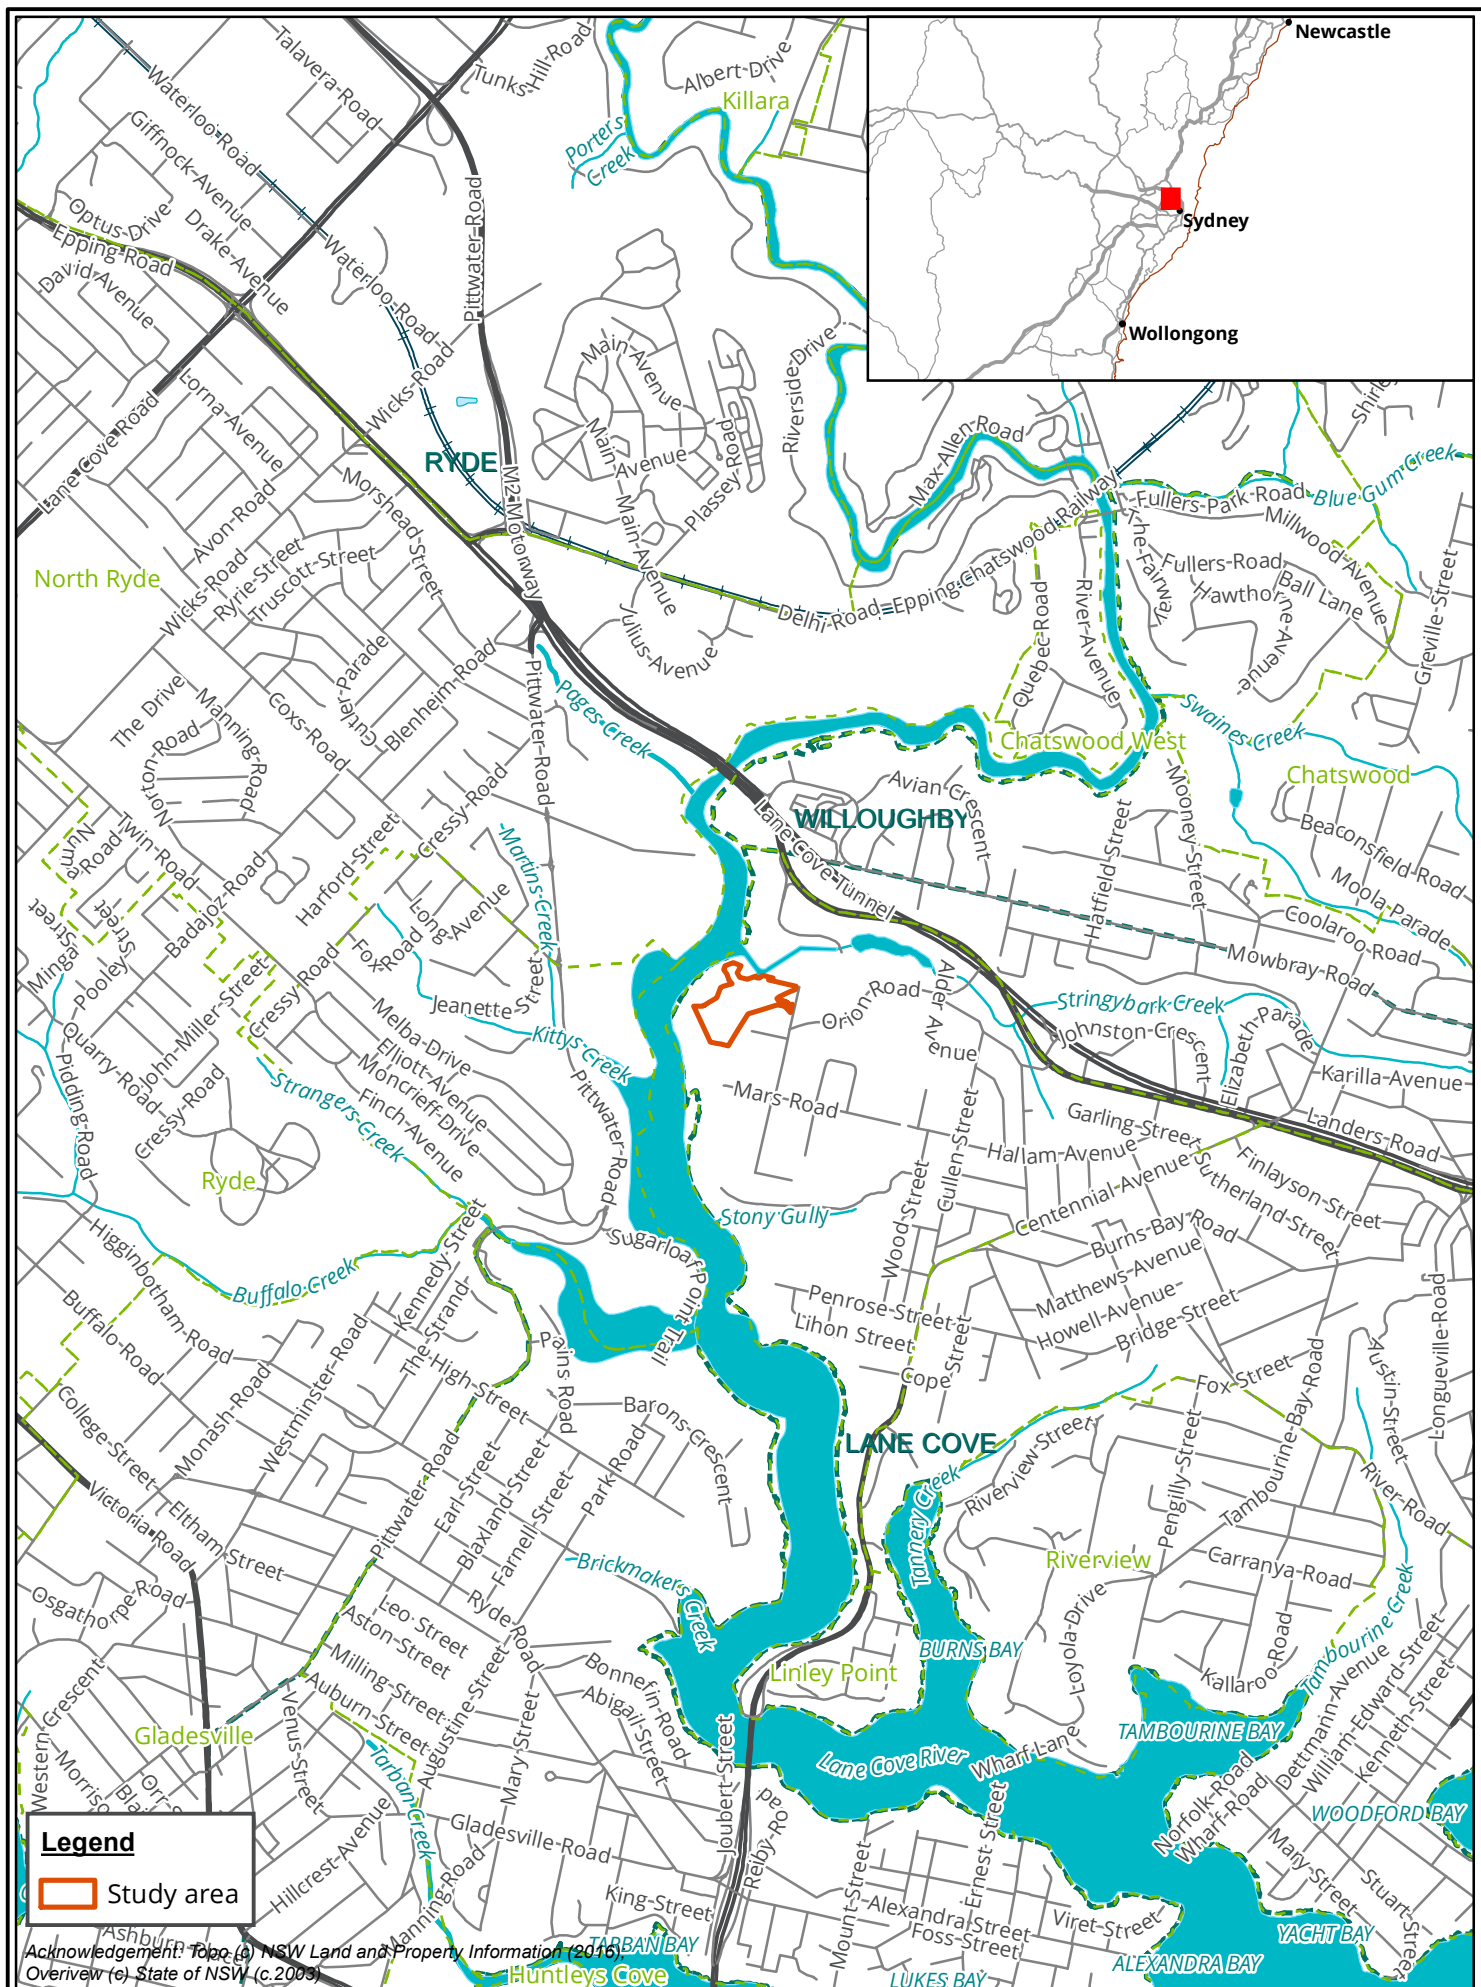


Figure 1 Location of the study area

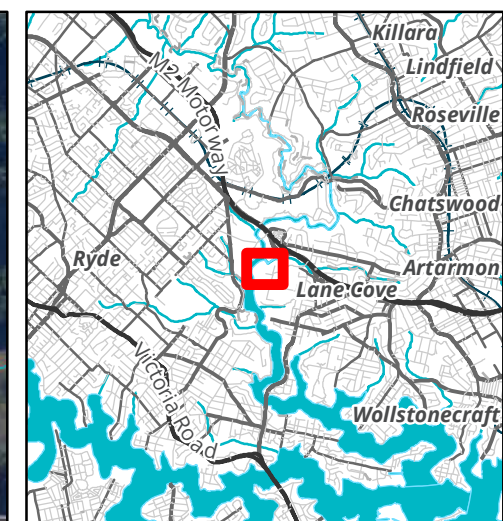

Legend

 Study area

Figure 2: Study area detail


0 20 40 60 80 100
Metres

Scale: 1:2,000 @ A3
Coordinate System: GDA 1994 NSW Lambert


 **biosis.**
Biosis Pty Ltd

Albury, Ballarat, Melbourne,
Newcastle, Sydney, Wangaratta & Wollongong

Matter: 29387
Date: 05 February 2019,
Checked by: AV, Drawn by: AEDM, Last edited by: amurray
Location: P:\29300s\29387\Mapping\29387_F2_StudyArea

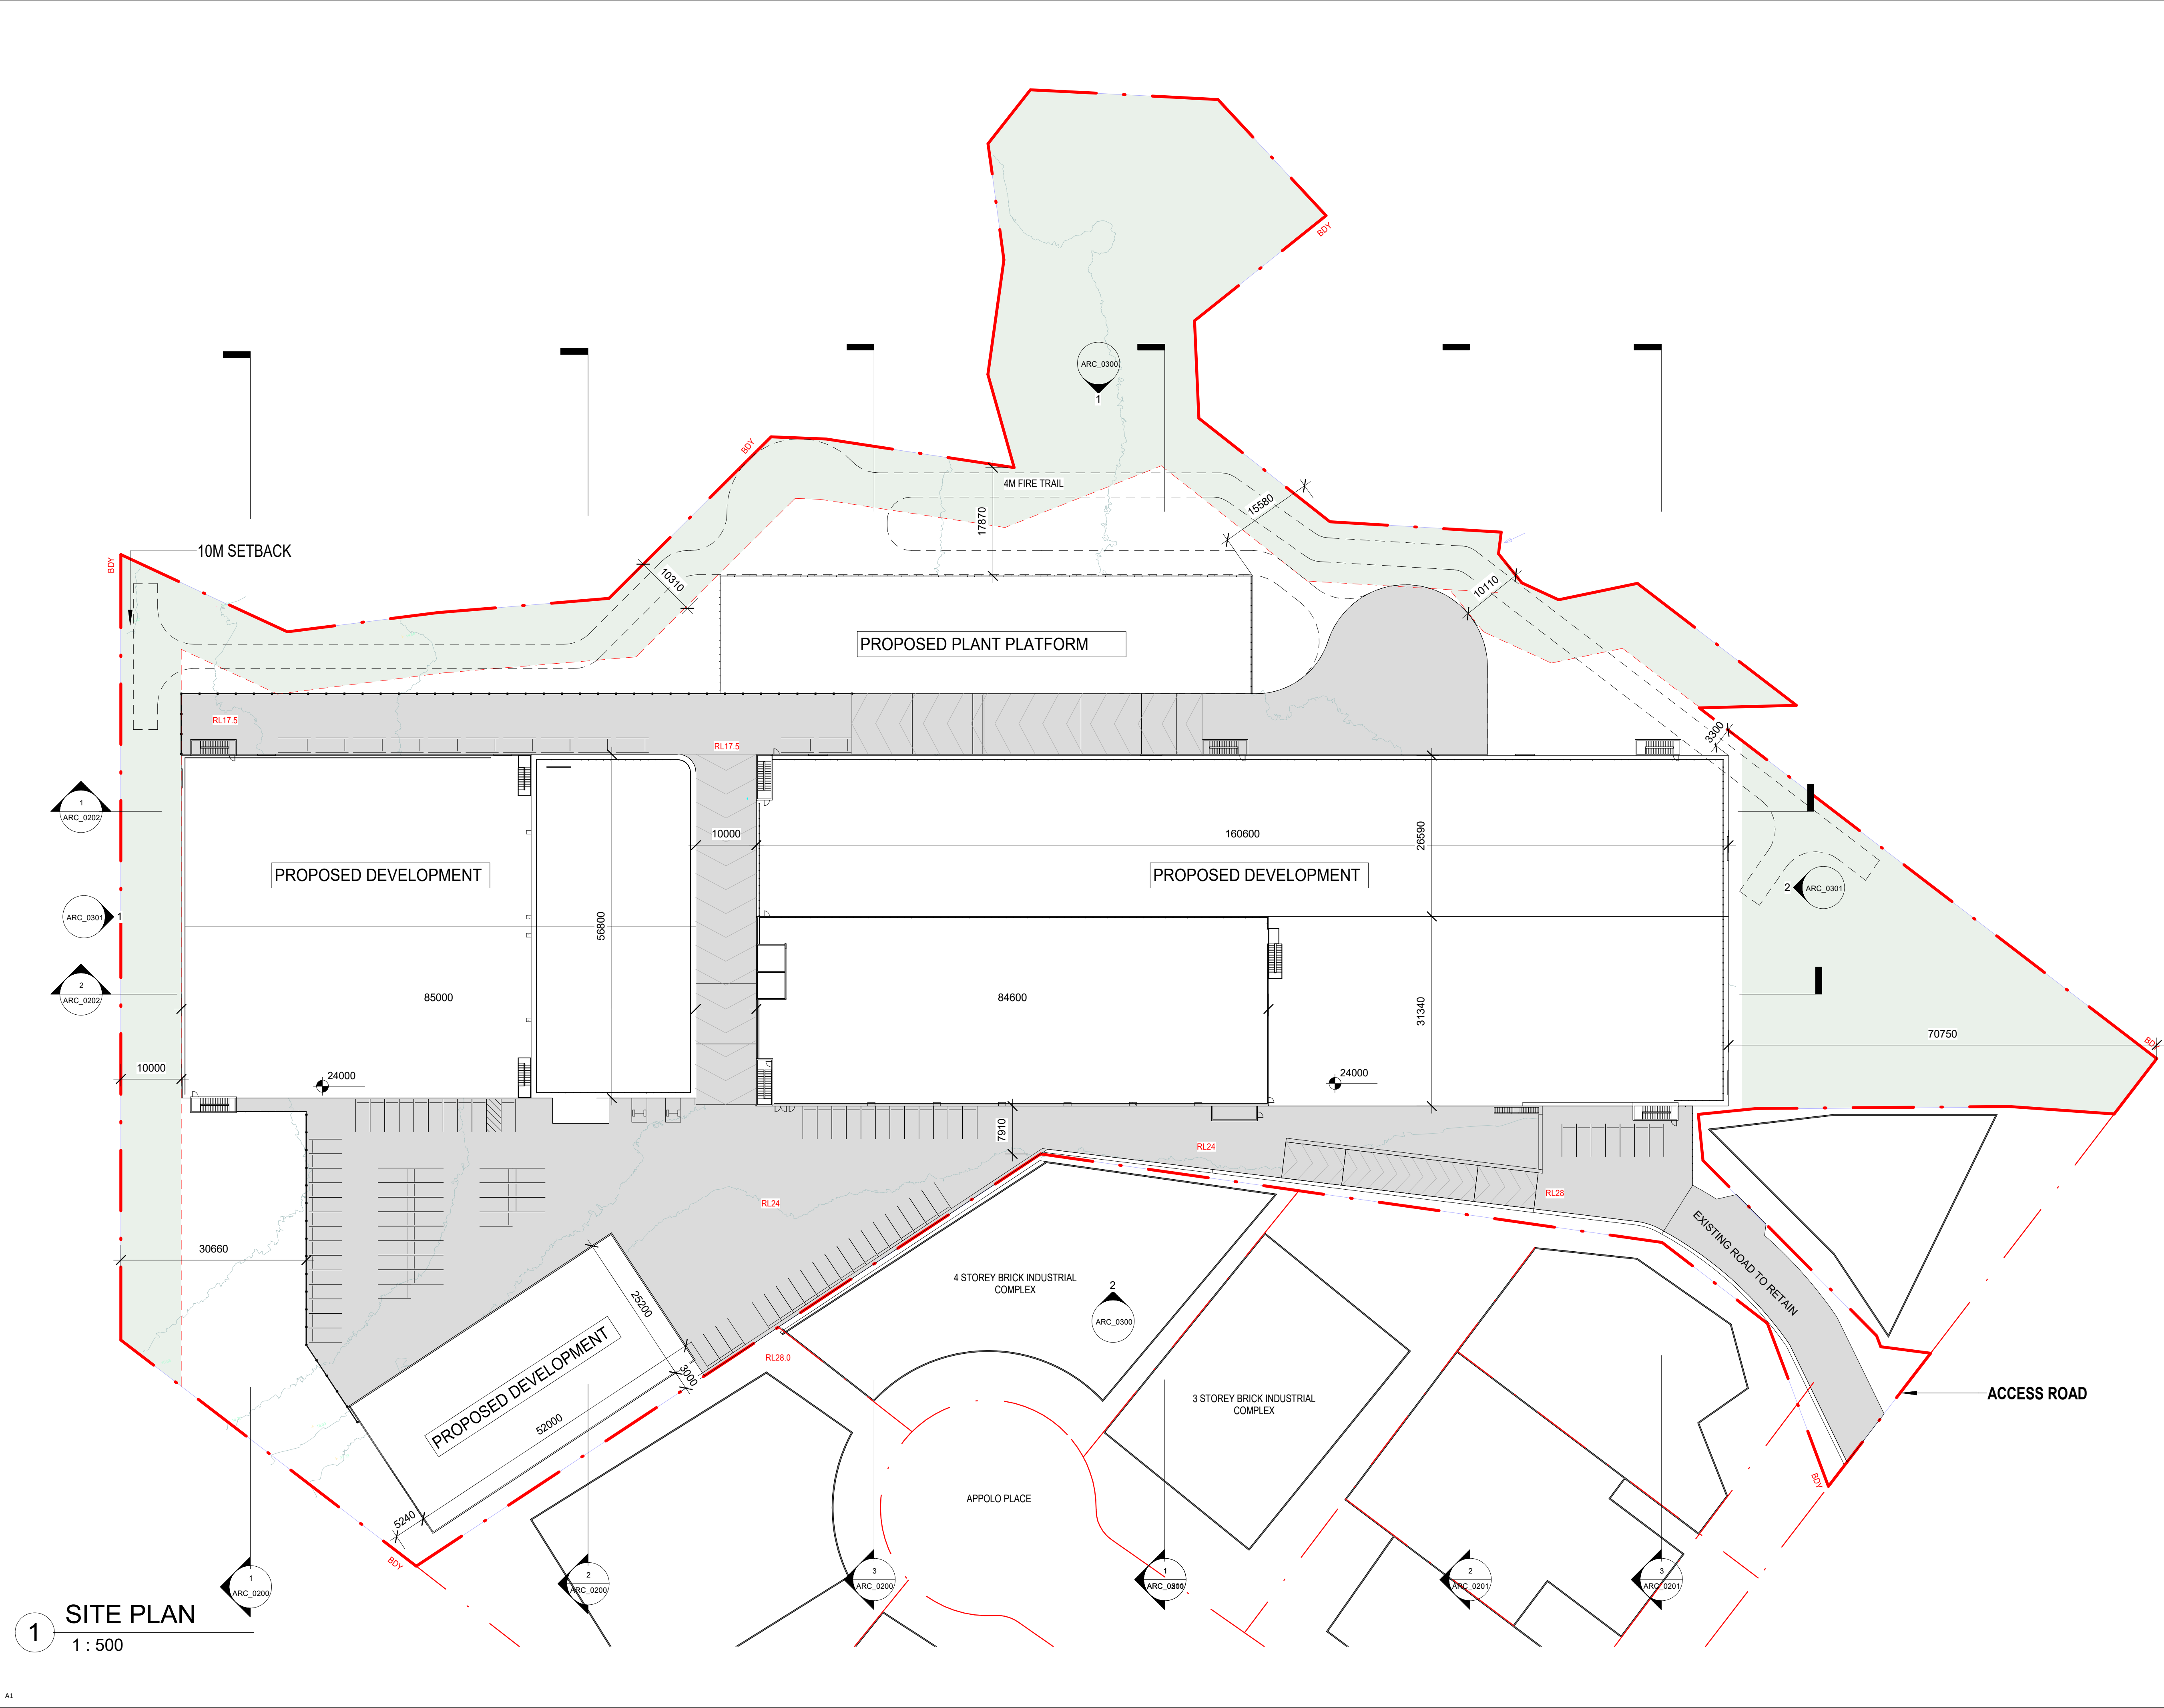

1 SITE PLAN
1 : 500

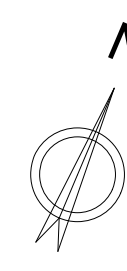

Issue	Date	Description
1	12.12.2018	ISSUE FOR APPROVAL

Project Manager

Services Design



+61 2 8069 8930
LEVEL 25
25 LIGH STREET
SYDNEY NSW 2000 AUSTRALIA
GREENBOX ARCHITECTURE PTY LTD
ABN: 79 139 779 098
ISO 9001 CERTIFIED QUALITY SYSTEM

- Use written dimensions only
- Do not scale from drawing
- Contractors shall confirm all dimensions on-site prior to commencing any work or producing any shop drawings.
- All materials to be used in accordance with the manufacturer's specifications and instructions and shall comply with the relevant Australian Standards
- Copyright of this drawing and design remain the property of Greenbox Architecture Pty Ltd
- Nominated Architect - Gerard Page; NSW reg No.7247, NZ reg No.3715, Vic reg No.17664, SA reg No.3061, QLD reg No.4538, WA reg No.2489

Client

Project
ATSYD2
1 SIRIUS ROAD LANE COVE WEST

Drawn By PL	Scale 1 : 500 @ A1
Checked By DW	Approved By AO
Date 12.12.2018	Job Number 180095
Project Status SSD	
Drawing Title MASTER PLAN	
Drawing Number ATSYD2_SSD_DRG_ARC_0050	Issue 1

2 Study area context

This section discusses the study area in regards to its landscape, environmental and Aboriginal cultural heritage context. This section should be read in conjunction with the archaeological report attached in Appendix 6. The background research has been undertaken in accordance with the *Code of Practice for the Archaeological Investigation of Aboriginal Objects in NSW* (DECCW 2010b).

Lane Cove is a leafy suburb in Northern Sydney, located near the Lane Cove River and Port Jackson. The topography is characterised by undulating to rolling rises and low hills on Hawkesbury Sandstone with broad convex crests, moderately inclined side slopes and wide benches. The landscape has been extensively cleared (Chapman & Murphy 1989, p.64).

2.1 Topography and hydrology

The study area is located within the Hawkesbury Sandstone formation and consists of friable medium to coarse grained quartz sandstone with some shale and laminate lenses. It weathers cavernously to form overhangs, which occur in a range of topographic locations. It also occurs as flat topped outcrops (platforms of varying sizes) and boulders, mainly on ridge tops but also along the sides of gullies and in valley bottoms (JMCHM 2008). The presence of sandstone cropping in areas of the Hawkesbury Sandstone formation gives rise to the potential for site types such as rock shelters and engraving sites. The topography consists of undulating to rolling low hills with a local relief of 20 to 80 metres and slopes of between 10% and 20%. Side slopes occur with narrow to wide outcropping of sandstone rock benches of 10 to 20 metres, often forming broken scarps of less than 5 metres (Chapman & Murphy 1989, p.64).

Stream order is recognised as a factor which assists the development of predictive modelling in Sydney Basin Aboriginal archaeology, and has seen extensive use in the Sydney region, most notably by Jo McDonald Cultural Heritage Management (JMCHM 2000, JMCHM 2005a, JMCHM 2005b, JMCHM 2006, JMCHM 2008). Predictive models which have been developed for the region have a tendency to favour higher order streams as the locations of campsites, as they would have been more likely to provide a stable source of water, and by extension other resources which would have been used by Aboriginal groups.

The stream order system used for this assessment was originally developed by Strahler (Strahler 1964). It functions by adding two streams of equal order at their confluence to form a higher order stream, as shown in Plate 1. As stream order increases, so does the likelihood that the stream would be a perennial source of water.

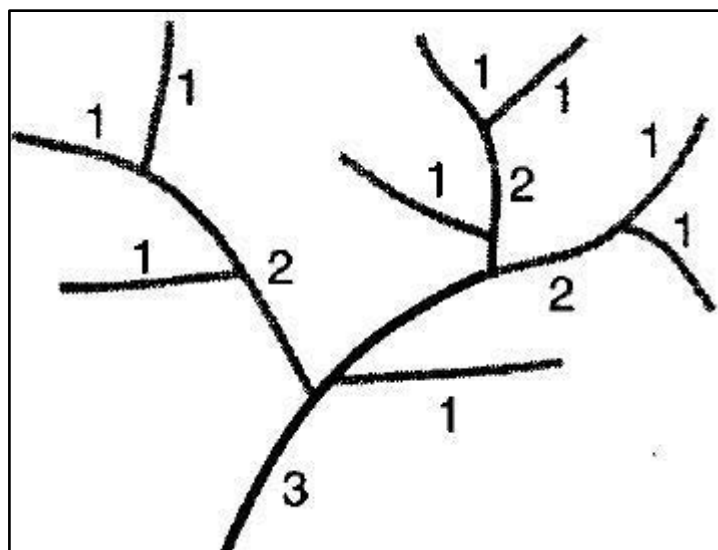


Plate 1 Diagram showing Strahler stream order (Ritter et al 1995, p. 151).

The nearest watercourse to the study area is Lane Cove River, a perennial watercourse located 31 metres away at its closest point. The river encompasses the western side of the study area. Stringybark Creek is also located adjacent to the study area along the northern boundary and is also a perennial watercourse but has been heavily modified where it meets the Lane Cove River. These watercourses would have provided excellent resources for Aboriginal people.

2.2 Soil landscapes

Soil landscapes have distinct morphological and topological characteristics that result in specific archaeological potential. They are defined by a combination of soils, topography, vegetation and weathering conditions. Soil landscapes are essentially terrain units that provide a useful way to summarise archaeological potential and exposure.

Two soil landscapes are present within the study area; the GyMEA Soil Landscape and Disturbed Terrain. The GyMEA soil landscape is characterised as an erosional soil landscape and consists of shallow uniform sands and earthy sands on ridges, and deeper sands, loamy sands and organic sands on wet benches. In hanging swamps, grey or yellow texture-contrast soils are present on shale benches. Accumulations of deeper sand and occasional podzols in depositional sites and along streams. As the soil landscape is characterised as highly erosional, the soil can be shallow and highly permeable, as well as producing low soil fertility. This would indicate that the presence of Aboriginal sites and objects is unlikely.

Disturbed terrain is present within the northern portion of the study area. It is characterised as landscapes extensively disturbed by human activity and development, including, but not limited to; complete disturbance, removal of top soil or burial of soil. The landscape includes soil, rock and building materials and usually occurs throughout areas near watercourses or within areas of previous swamps, estuaries or wetlands. Local relief is usually greater than 2 metres, up to 10 metres. Most areas have heavily disturbed ground and are often landscaped and artificially drained.

The soil landscapes associated with the study area are identified within Table 3, Table 4 and Figure 6.

Table 1 Gymea soil landscape characteristics (Chapman & Murphy 1989, p.65–66)

Soil material	Description
Gymea 1 (gy1)	Loamy sand to sandy loam with loose, apedal single-grained structure and porous sandy fabric. It generally occurs as topsoil (A1 horizon). The colour often becomes lighter with depth, ranging from brownish-black 10YR 2/2) to bleached dull yellow-orange (10YR 7/2). It is often water repellent under native vegetation. The pH ranges from strongly acidic to slightly acidic. Small sandstone and platy ironstone fragments, charcoal fragments and roots are common in this soil level.
Gymea 2 (gy2)	Consists of earthy, yellowish-brown clayey sand, with apedal massive structure and porous earthy fabric. It commonly occurs as subsoil over sandstone bedrock (B horizon). Exposure at the surface creates a hard setting topsoil. Potential to increase gradually to a light sandy clay loam with depth. Colour is commonly yellowish-brown (10YR 6/8), with orange mottles occasionally present with depth. The pH ranges from strongly acidic to slightly acidic. Sandstone and ironstone fragments are common and are often concentrated in stone lines in the upper parts of this material. Charcoal fragments are common, whilst roots are rare.
Gymea 3 (gy3)	Consists of earthy to weakly pedal, yellowish-brown sandy clay loam. Commonly a yellowish-brown sandy clay loam to sandy clay with an apedal massive structure and an earthy porous fabric. It usually occurs as subsoil (B or C horizon) on coarse sandstone. Texture may increase gradually with depth to sandy clay. Occasionally sub-angular blocky shaped peds are present. Peds are commonly rough-faced and porous and range in size from 5-20 millimetres. Colour is commonly yellowish brown (10YR 5/8, 6/6, 6/8; 2.5Y5/6, 5/4). Orange mottles may occur with depth. The pH ranges from strongly acidic to slightly acidic. Strongly weathered sandstone fragments are common, with roots and charcoal fragments being rare.
Gymea 4 (gy4)	Moderately to strongly pedal, yellowish-brown clay. This is commonly a yellowish-brown sandy clay or light clay with a moderately to strongly pedal structure and either a smooth or rough-faced ped fabric. This material occurs as subsoil on shale bedrock (Band C horizons). Peds ranging in size from 5-50 millimetres, are either smooth or rough-faced and are polyhedral to sub-angular blocky. Colour is commonly yellow-brown (10YR 6/6), but can vary from dark reddish brown (2.5YR3/6) to light grey (7.5YR8/1). Red, orange and grey mottles are occasionally present at depth. The pH ranges from strongly acidic to slightly acidic. Shale and ironstone fragments are often present but charcoal fragments are absent and roots are rare.

Table 2 Disturbed Terrain soil landscape characteristics (Chapman & Murphy 1989, pp.132–134)

Soil material	Description
Disturbed Terrain 1 (xx1)	Loose black sandy loam. A black loamy sand to loam-fine-sandy with a loose apedal single-grained structure and sandy fabric. It is used for topsoiling turf and often corresponds to the lowland Nepean River alluvium or Elderslie soil series. Local sands have also been used for topdressing. This material occurs as topsoil (A1 horizon). The material is brittle when dry and crumbly when moist. The colour ranges from a dark brown to black (10YR 3/3-10YR 2/1) or brown (10YR 4/6). It is often water repellent and a surface crust may be present. The pH ranges from moderately acidic to neutral. Roots are common to abundant when turfed and ironstone nodules are occasionally present.

Soil material	Description
Disturbed Terrain 2 (xx2)	This is a mottled, compacted sandy clay loam to medium clay with an apedal massive to moderately pedal structure. It generally has been compacted to form an impermeable isolating cap over hazardous buried materials. Peds when present are often platy and smooth-faced. The pH and colour of the soil is highly variable, ranging from extremely acidic to slightly alkaline. Ironstones are occasionally present and roots are absent.
Disturbed Terrain 3 (xx3)	This material is commonly referred to as fill and may consist of any type of soil or regolith material. It often includes demolition rubble and industrial and household wastes. Identifiable features such as colour, pH, and structure vary markedly.
Disturbed Terrain 4 (xx4)	This material consists of dark dredged sands, sandy loams to silty clay loams and sandy clays with apedal single-grained to massive structure and sandy fabric. This material occurs as subsoil. Colour varies from black (10YR 2/1) to a yellowish-brown (2.5Y 5/2). Charcoal, shells or shell fragments are commonly present. This material swells, is highly saline and neutral to moderately alkaline when first dredged, but with drainage and oxidation the salinity levels drop and acidity may increase dramatically.

2.3 Climate and rainfall

The Sydney (Observatory Hill) (site number: 066062) weather station is located approximately 5.5 kilometres from the study area and provides climate and rainfall data. During summer the mean maximum temperature reaches 26°C, with a mean minimum temperature of 17.6 °C (BOM 2018). In winter the mean maximum temperature is 16.4 °C, with a mean minimum temperature of 8.1 °C (BOM 2018). The highest rainfall is recorded during June with 133.2 millimetres, and the lowest rainfall recorded occurs during September with 67.8 millimetres (BOM 2018).

2.4 Landscape resources

The Sydney Basin would have generally provided a number of resources utilised by Aboriginal people. The wider region possesses distinct ecological zones, including open forest and open woodland, with riparian vegetation extending along many of the watercourses. Each ecological zone hosts a different array of floral and faunal species, many of which would have been utilised according to seasonal availability. Aboriginal inhabitants of the region would have had access to a wide range of avian, terrestrial and aquatic fauna and repeated firing of the vegetation would have opened up the foliage allowing ease of access through and between different resource zones.

Many of the plants found within the Sydney Basin were important to Aboriginal people and could be used for numerous purposes. These include using the wood to make implements, berries, leaves and tubers for food and medicines as well as bark for shelters. One of the plants exploited may have been the eucalypt, whose leaves can be crushed and used for medicinal purposes, while the sap can be used as a sweet sugary food source and the bark could be used to make bowls and shelters (Rhodes & Dunnett 1985).

Within the study area, the landscape would have supported a dry sclerophyll woodland with an open forest, however this original landscape has been extensively cleared by European colonization and development throughout the years. The plants most typically found throughout the area include red bloodwood *Eucalyptus gummifera*, yellow blood wood *E. eximia*, scribbly gum *E. haemastoma*, brown stringybark *E. capitellata* and old man banksia *Banksia serrata*. Native fauna would have included the noisy minor *Manorina (Myzantha) melanocephala*, kookaburra *Dacelo (Dacelo) novaeguineae*, Australian brushtail possum *Trichosurus vulpecula*,

grey-headed flying-fox *Pteropus poliocephalus*, eastern blue-tongue *Tiliqua scincoides*, water dragon *Intellagama lesueurii*, red-bellied black snake *Pseudechis porphyriacus* and red rockcod *Scorpaena cardinalis*.

The various fauna species historically present within the study area would have provided a range of resources for Aboriginal people. Terrestrial and avian resources were not only used for food, but also provided a significant contribution to the social and ceremonial aspects of Aboriginal life through their use as ritual implements or even simply through fashioning as personal adornments (Attenbrow 2010, pp.107–110). Mammals such as kangaroos and wallabies and arboreal mammals such as possums were used as a food source, and for tool making. Bones and teeth were also used as points or barbs for hunting spears and fishing spears. Tail sinews are known to have been used as a fastening cord, whilst 'bone points' frequently occur in rock shelters (Attenbrow 2010, p.109). Animal skin, fur and sinews were also used for personal adornment and in making cloaks. Animals such as Brush-tailed Possums were highly prized for their fur, with possum skin cloaks recorded by the first settlers in the area. The cloaks were worn fastened over one shoulder and under the other. Kangaroo teeth were incorporated into decorative items such as head bands and beads were made from reeds and teeth. Aquatic species such as freshwater crayfish, fish and eels would have been easily accessible in larger waterways, such as the Lane Cove River (Rosen 1995).

2.5 European land use history

The first written use of the name Lane Cove occurred on 2 February 1788, soon after the arrival of the First Fleet in Port Jackson. Several possibilities for the name have been suggested, although none have been supported by written evidence. One suggestion was that it was named after Lieutenant Michael Lane, a respected cartographer, who worked with Captain James Cook in Canadian waters. The other possibility is that the name was bestowed in honour of John Lane, son of the Lord Mayor of London, and a good friend of Governor Arthur Phillip.

The study area is split over three original land grants. While part of the surrounding area was granted to privates and non-commissioned officers of the New South Wales Corp in 1794, the study area land was not purchased until later. The three original grants belonged to Thomas Moore (40 acres purchased in April 1832), Henry O'Brien (10 acres purchased in April 1834) and William Hamey (11 acres purchased in April 1855). These allotments can be seen on crown plans and parish maps (Plate 2, Plate 3, Plate 4). At this time the land was dense with vegetation.

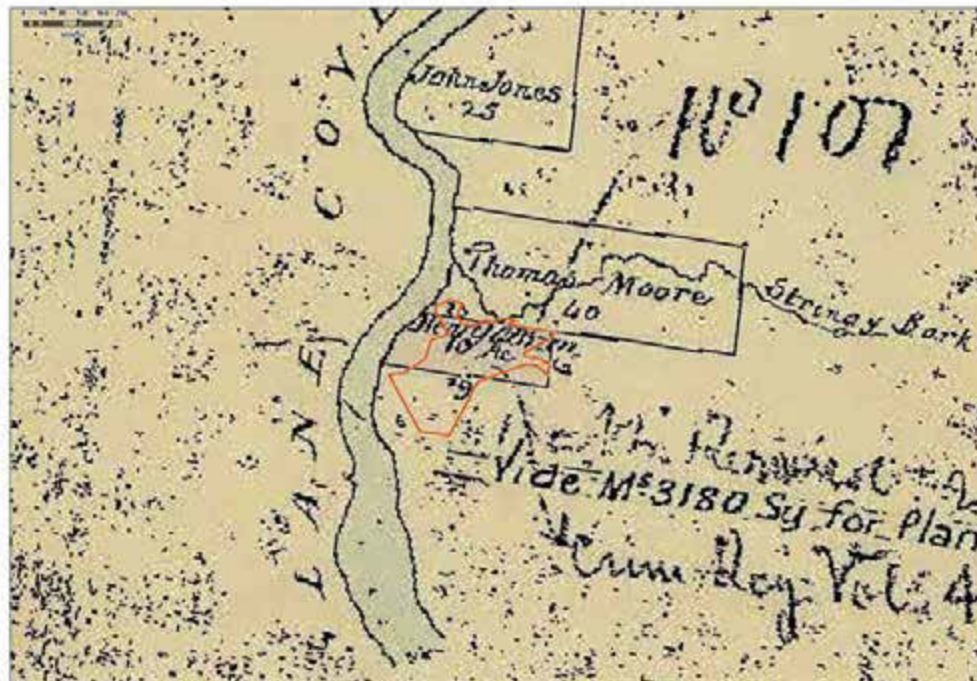


Plate 2 1833 Crown Plan showing Thomas Moore and Henry O'Briens grants (Source: NSW Land Registry Services, Crown Plan 138.690)



Plate 3 1854 Crown Plan showing the three original grants (Source: NSW Land Registry Services, Crown Plan 627.690)



Plate 4 Parish Map of Willoughby showing original grants (Source: NSW Land Registry Services, County of Cumberland Parish of Willoughby (sheet 1A))

The land use of the study area didn't change for many years, however the immediate surrounds did. The Chicago Cornflour Factory opened in 1894, followed by the Cumberland Paper Mill in 1912, both located to the north, out of the study area. These are both locally listed items (the Chicago Mills a listed archaeological site whereas the Cumberland Paper Mill is still standing). The area surrounding Mars Road to the south of the study area was also developed by being heavily subdivided in the 20th century. The study area can be seen in a subdivision plan from 1920, still in the configuration of the original land grant. No structures appear and it had not been subdivided at this point (Plate 5). The Cumberland Mill can also be seen in this subdivision plan, outside of the study area. It appears that the grants that made up the study area were not used extensively for farming or development, as historical aerals illustrate much of the area was still heavily vegetated.



Plate 5 Subdivision plan from 1920 showing no development on the study area (Source: Lane Cove Library Local History LHM994.4139/1920/VIC)

A 1943 historical aerial (Plate 6) illustrates that majority of the study area had not yet been cleared or developed. In the northern portion of the study area, a large water tank, 85 metres in circumference, is present, with the land extending 80 metres to the south-east providing a small clearing with a track running throughout. As the tank is in the northern portion of the study area with no buildings directly adjacent to it, it is possible it could relate to the Cumberland Paper Mills. In the western portion of the study area, there is evidence of a building 14 metres in length. It is not known what the building was used for, however it is not present in current aerials, postulating that it has since been demolished. It is evident that the intensive clearing and industrial development of recent times had not yet occurred in 1943.



Plate 6 1943 aerial showing dense vegetation in the majority of the study area and two structures (Source: Land and Property Information)

Current aerals (Plate 7) illustrate that the study area has undergone massive vegetative clearing and industrial development, with majority of the area being highly disturbed. The structures present in the 1943 aerals are no longer present, with sparse vegetation surrounding the edges of the study area. Within the study area, there are large piles of rubble and fill objects, heavily concentrated towards the western side of the area. Graded dirt roads appear throughout the study area, particularly towards the western side. In the southern portion there is an incised channel bank 20 metres east of the southern boundary. The eastern portion of the area backs onto to a highly developed light industrial area.



Plate 7 Current aerial showing cleared land with no structures (Source: Land and Property Information)

3 Aboriginal cultural heritage context

3.1 Ethnohistory

The Sydney area has been home to Aboriginal people for over 30,000 years with the earliest known radiocarbon date for the Aboriginal occupation of the Cumberland Plains being associated with an archaeological deposit at Parramatta approximately 13 kilometres to the west of the study area, which was dated to 30,735 ± 407 BP (Jo McDonald Cultural Heritage Management Pty Ltd 2005a). The study area falls within the country of the Guringai and Darug language groups (Tindale 1974), which stretched from what is now known as Newcastle through to the southernmost part of present day Sydney (Lane Cove Council 2018a). The study area was originally occupied by the Cam-mer-ray-gal Group of the Ku-ring-gai Aboriginal tribe, until 1788, when the first recorded landing in Lane Cove of a European occurred (Lane Cove Council 2018b). Lieutenant Henry Lidgbird Ball crossed the Greenwich Peninsula on return from a trip to Middle Harbour (Lane Cove Council 2018b). Ball was a naval officer who commanded the H.M.S *Supply* in the First Fleet and was a member of numerous exploring parties around the Port Jackson area between 1788 and 1790 (Parsons 1966).

After the arrival of European settlers in the area, the movement of Aboriginal people became increasingly restricted. European expansion along the Cumberland Plain was swift and soon there had been considerable loss of land to agriculture. This led to violence and conflict between Europeans and Aboriginal people as both groups sought to compete for the same resources (Brookes & Associates et al. 2003, p.16). At the same time diseases such as small pox were having a devastating effect on the Aboriginal population. Death, starvation and disease were some of the disrupting factors that led to a reorganisation of the social practices of Aboriginal communities after European contact. The formation of new social groups and alliances were made as Aboriginal people sought to retain some semblance of their previous lifestyle.

3.2 Aboriginal heritage located in the study area

A search of the AHIMS database (Client Service ID: 396636) identified 115 Aboriginal archaeological sites within a 2 by 2 kilometre search area, centred on the proposed study area. None of these registered sites are located within the study area.

Owing to the levels of disturbance, there were no locations identified within the study area which were considered to have the potential to retain intact archaeological deposits of artefacts or shell. The majority of the study area has been subject to cut and fill actions, with much of the original ground surface having been visibly altered. Within the study area, disturbed included the removal of topsoil, construction of buildings within the study area, and the dumping and removal of contaminated fill. Based on this archaeological survey, the study area has been assessed as holding low archaeological potential to contain intact Aboriginal sites.

3.3 Interpretation of past Aboriginal land use

The AHIMS site data demonstrates that there is a concentration of sites along the Lane Cove River and Stringybark Creek. Both water sources are perennial sources, which would provide access to flowing water, and to aquatic species such as freshwater crayfish, fish and eels (Rosen 1995). As demonstrated by White and McDonald (2010) water supply was a significant factor influencing Aboriginal land use and habitation in the area. The close access to water and resources suggests that Aboriginal people would have used the area;

however, the landforms within the study area are not favourable for long term occupation and subsequent high levels of disturbances would have destroyed any Aboriginal sites present.

As noted above the study area likely provided a vast array of resources for the Cam-mer-ray-gal to exploit. The earliest known radiocarbon date for the Aboriginal occupation of the Cumberland Plains is associated with a cultural / archaeological deposit at Parramatta approximately 13 kilometres to the west of the current study area, which was dated to $30,735 \pm 407$ BP (Jo McDonald Cultural Heritage Management Pty Ltd (JMCHM) 2005a, Jo McDonald Cultural Heritage Management Pty Ltd 2005b) Archaeological evidence of Aboriginal occupation of the Cumberland Plains indicates that the area was intensively occupied from approximately 4000 years BP (Dallas 1982, p.7).

DRAFT

Figure 4 Aboriginal sites located in the vicinity of the study area

NOT TO BE MADE PUBLIC

DRAFT

4 Aboriginal community consultation

Consultation with the Aboriginal community has been undertaken in compliance with the consultation requirements as detailed below. A consultation log of all communications with RAPs is provided in Appendix 1.

4.1 Stage 1: Notification of project proposal and registration of interest

4.1.1 Identification of relevant Aboriginal stakeholders

In accordance with the consultation guidelines, Biosis notified the following bodies regarding the proposed works:

- Lane Cove Council
- OEH
- NSW Native Title Services Corporation Limited (NTSCORP Limited)
- Office of the Registrar, Aboriginal Land Rights Act 1983 of Aboriginal Owners
- National Native Title Tribunal (NNTT)
- Greater Sydney Local Land Services
- Metropolitan Local Aboriginal Land Council (MLALC).

A list of known Aboriginal stakeholders in the Lane Cove area was provided by OEH (a copy of this response is provided in Appendix 2 and includes:

- | | |
|-----------------------------------|--|
| • Darug Land Observations | • Bilinga Cultural Heritage Technical Services |
| • A1 Indigenous Services | • Gunyuu Cultural Heritage Technical Services |
| • Eric Keidge | • Munyunga Cultural Heritage Technical Services |
| • Tocomwall | • Murrumbul Cultural Heritage Technical Services |
| • Amanda Hickey Cultural Services | • Wingikara Cultural Heritage Technical Services |
| • Gunyuu | • Gulaga |
| • Walbunja | • Biamanga |
| • Badu | • Callendulla |
| • Goobah Developments | • Murramarang |
| • Wullung | • DJMD Consultancy |
| • Yerramurra | • Butucarbin Aboriginal Corporation |
| • Nundagurri | • Didge Ngunawal Clan |

- Murrumbul
- Jerringong
- Pemulwuy CHTS
- Bilinga
- Munyunga
- Wingikara
- Minnamunnung
- Walgalu
- Thauaira
- Dharug
- Ginninderra Aboriginal Corporation
- Nerrigundah
- Wailwan Aboriginal Group
- Barking Owl Aboriginal Corporation
- Thoorga Nura
- Darug Boorooberongal Elders Aboriginal Corporation
- B. H. Heritage Consultants
- Ngambaa Cultural Connections

A search conducted by the Office of the Registrar, *Aboriginal Land Rights Act 1983* (NSW) listed no Aboriginal Owners with land within the study area. A search conducted by the NNTT listed no Registered Native Title Claims, Unregistered Claimant Applications or Registered Indigenous Land Use Agreements within the study area.

4.1.2 Public notice

In accordance with the consultation guidelines, a public notification was placed in the following newspapers:

- *Daily Telegraph* (30 January 2019)

The advertisement invited Aboriginal people who hold cultural knowledge to register their interest in a process of community consultation to provide assistance in determining the significance of Aboriginal object(s) and/or places in the vicinity of the study area. A copy of the public notice is provided in Appendix 2.

4.1.3 Registration of Aboriginal parties

Aboriginal groups identified in Section 4.1.1 were sent a letter inviting them to register their interest in a process of community consultation to provide assistance in determining the significance of Aboriginal object(s) and/or places in the vicinity of the study area. In response to the letters and public notice, a total of 40 groups registered their interest in the project. Responses to registration from Aboriginal parties are provided in Appendix 3. A full list of Aboriginal parties who registered for consultation is provided below:

- Yurrandaali Cultural Services
- Yulay Cultural Services
- Barraby Cultural Services
- Darug Land Observations
- A1 Indigenous Services
- Tocomwall
- Amanda Hickey Cultural Services
- B. H. Heritage Consultants
- Bilinga
- Gangangarra
- Kuringgai
- Munyunga
- Murrin
- Murrumbul
- Ngarigo
- Ngunawal

- Darug Boorooberongal Elders Aboriginal Corporation
- Bullawaya
- Gunyuu
- Badu
- Walbunja
- Eora
- Elouera
- Djiringanj
- Dharug
- Curwur Murre
- Bidawal
- Tharawal
- Nundagurri
- Goobah
- Walbunja Elders
- Gulla Gunar
- Golangaya
- Gadung
- Bulling Gang
- Yerramurra
- Wingikara
- Wandandian
- Walgalu
- Thauaira

4.2 Stage 2: Presentation of information about the proposed project

On 19 February 2019, Biosis provided RAPs with details about the proposed development works (project information pack). A copy of the project information pack is provided in Appendix 3.

4.3 Stage 3: Gathering information about cultural significance

4.3.1 Archaeological assessment methodology information pack

On 19 February 2019, Biosis provided each RAP with a copy of the project methodology pack outlining the proposed Aboriginal cultural heritage assessment process and methodology for this project. RAPs were given 28 days to review and prepare feedback on the proposed methodology. A copy of the project methodology pack is provided in Appendix 4.

Yurrandaali, Darug Land Observations, A1 Indigenous Services, Darug Boorooberongal Elders Aboriginal Corporation, Barraby, and Yulay all support the methodology for this project.

4.3.2 Information gathered during fieldwork

The MLALC was invited to attend the archaeological survey of the study area. Based on discussions held on site between Biosis and the MLALC's Site Officer, it is understood that both the LALC and Biosis have assessed the study area as holding low potential to contain intact Aboriginal sites; however, the landscape of the Lane Cove River is considered significant. A letter was provided by MLALC and is provided in Appendix 4.

4.4 Stage 4: Review of draft Aboriginal cultural heritage assessment report

To be completed following the review and comments from RAPs after the statutory 28 day period.

5 Aboriginal cultural significance assessment

The two main values addressed when assessing the significance of Aboriginal sites are cultural values to the Aboriginal community and archaeological (scientific) values. This report will assess the cultural values of Aboriginal sites in the study area. Details of the scientific significance assessment of Aboriginal sites in the study area are provided in Appendix 6.

5.1 Introduction to the assessment process

Heritage assessment criteria in NSW fall broadly within the significance values outlined in the Australia International Council on Monuments and Sites (ICOMOS) *Burra Charter: The Australia ICOMOS Charter for Places of Cultural Significance* (Australia ICOMOS 2013) (the Burra Charter). This approach to heritage has been adopted by cultural heritage managers and government agencies as the set of guidelines for best practice heritage management in Australia. These values are provided as background and include:

- **Historical significance** (evolution and association) refers to historic values and encompasses the history of aesthetics, science and society, and therefore to a large extent underlies all of the terms set out in this section. A place may have historic value because it has influenced, or has been influenced by, a historic figure, event, phase or activity. It may also have historic value as the site of an important event. For any given place the significance will be greater where evidence of the association or event survives *in situ*, or where the settings are substantially intact, than where it has been changed or evidence does not survive. However, some events or associations may be so important that the place retains significance regardless of subsequent treatment.
- **Aesthetic significance** (Scenic/architectural qualities, creative accomplishment) refers to the sensory, scenic, architectural and creative aspects of the place. It is often closely linked with social values and may include consideration of form, scale, colour, texture, and material of the fabric or landscape, and the smell and sounds associated with the place and its use.
- **Social significance** (contemporary community esteem) refers to the spiritual, traditional, historical or contemporary associations and attachment that the place or area has for the present-day community. Places of social significance have associations with contemporary community identity. These places can have associations with tragic or warmly remembered experiences, periods or events. Communities can experience a sense of loss should a place of social significance be damaged or destroyed. These aspects of heritage significance can only be determined through consultative processes with local communities.
- **Scientific significance** (Archaeological, industrial, educational, research potential and scientific significance values) refers to the importance of a landscape, area, place or object because of its archaeological and/or other technical aspects. Assessment of scientific value is often based on the likely research potential of the area, place or object and will consider the importance of the data involved, its rarity, quality or representativeness, and the degree to which it may contribute further substantial information.

The cultural and archaeological significance of Aboriginal and historic sites and places is assessed on the basis of the significance values outlined above. As well as the Burra Charter significance values guidelines, various government agencies have developed formal criteria and guidelines that have application when assessing the significance of heritage places within NSW. Of primary interest are guidelines prepared by the Australian

Government, OEH and the Heritage Branch, and Department of Planning and Environment. The relevant sections of these guidelines are presented below.

These guidelines state that an area may contain evidence and associations which demonstrate one or any combination of the Burra Charter significance values outlined above in reference to Aboriginal heritage. Reference to each of the values should be made when evaluating archaeological and cultural significance for Aboriginal sites and places.

In addition to the previously outlined heritage values, the OEH *Guidelines to Investigating, Assessing and Reporting on Aboriginal Cultural Heritage in NSW* (OEH 2011) also specify the importance of considering cultural landscapes when determining and assessing Aboriginal heritage values. The principle behind a cultural landscape is that 'the significance of individual features is derived from their inter-relatedness within the cultural landscape'. This means that sites or places cannot be 'assessed in isolation' but must be considered as parts of the wider cultural landscape. Hence the site or place will possibly have values derived from its association with other sites and places. By investigating the associations between sites, places, and (for example) natural resources in the cultural landscape the stories behind the features can be told. The context of the cultural landscape can unlock 'better understanding of the cultural meaning and importance' of sites and places.

Although other values may be considered – such as educational or tourism values – the two principal values that are likely to be addressed in consideration of Aboriginal sites and places are the cultural/social significance to Aboriginal people and their archaeological or scientific significance to archaeologists and the Aboriginal community. The determinations of archaeological and cultural significance for sites and places should then be expressed as statements of significance that preface a concise discussion of the contributing factors to Aboriginal cultural heritage significance.

5.2 Cultural (social significance) values

Cultural or social significance refers to the spiritual, traditional, historical and/or contemporary associations and values attached to a place or objects by Aboriginal people. Aboriginal cultural heritage is broadly valued by Aboriginal people as it is used to define their identity as both individuals and as part of a group (DECCW 2010a, p.iii). More specifically it provides:

- A 'connection and sense of belonging to Country' (DECCW 2010a, p.iii).
- A link between the present and the past (DECCW 2010a, p.3).
- A learning tool to teach Aboriginal culture to younger Aboriginal generations and the general public (DECCW 2010a, p.3).
- Further evidence of Aboriginal occupation prior to European settlement for people who do not understand the magnitude to which Aboriginal people occupied the continent (DECCW 2010a, p.3).

It is acknowledged that Aboriginal people are the primary determiners of the cultural significance of Aboriginal cultural heritage. During consultation the following information was provided by RAPs in regards to the cultural values of the study area. The MLALC provided the following information regarding the study area:

- *"Aboriginal people have used the area in the past as an important place of trade or gatherings".*
- *"The indication of Aboriginal occupations within the vicinity is obvious with the surrounding landscape usage and the significance for Aboriginal people past and present still remains".*
- *"All parts of Sydney hold significance to Aboriginal people and the preservation and conservation of some sites are of high importance for our connection to Country".*

5.3 Historic values

Historic significance refers to associations a place or object may have with a historically important person, event, phase or activity to the Aboriginal and other communities. The study area is not known to have any historic associations.

5.4 Archaeological (scientific significance) values

An archaeological scientific assessment was undertaken for the study area and is presented in detail as part of the attached Archaeological Report (Appendix 6).

5.5 Aesthetic values

The aesthetic value of the study area is considered low due to the extensive disturbance, with both cut and fill actions identified during the survey, large amounts of illegal dumping of material, and the construction of both tracks and drainage features throughout. However, the association of the landscape with the Lane Cove River is considered significant and is closely linked with Aboriginal cultural values and provides a context for Aboriginal sites that gives a strong sense of place.

5.6 Statement of significance

The significance the study area was assessed in accordance with the following criteria:

- Requirements of the code.
- The Burra Charter.
- *Guide to investigating and reporting on Aboriginal heritage.*

The combined use of these guidelines is widely considered to represent the best practice for assessments of Aboriginal cultural heritage. The identification and assessment of cultural heritage values includes the four values of the Burra Charter: social, historical, scientific and aesthetic values. The resultant statement of significance has been constructed for the study area based on the significance ranking criteria assessed in Table 3.

5.6.1 Statement of significance for the study area

The study area has been subject to cut and fill actions, with much of the original ground surface having been visibly altered. Within the study area, disturbed included the removal of topsoil, construction of buildings within the study area, and the dumping and removal of contaminated fill. No Aboriginal sites are located within the study area and due to the high levels of previous ground disturbance, no areas of Aboriginal archaeological potential were identified. The entire study area has therefore been assessed as having low Aboriginal archaeological potential. The Aboriginal community has indicated during consultation that the general area around the Lane Cover River has significance to the community. The study area does not have any direct historical associations and the scientific significance of this site has been assessed as low.

Table 3 Significance assessment criteria

Site name	Criteria	Ranking
Lot 1 DP 1151370	Cultural – discussions with the local Aboriginal communities reflect that the general area is significant.	Moderate

Site name	Criteria	Ranking
	Historical – the site is not connected to any historical event or personage.	Low
	Scientific – the site possesses low archaeological values.	Low
	Aesthetic – the site is located adjacent to the Lane Cover River. It has been impacted by multiple cut and fill actions, with much of the original ground surface being significantly altered.	Low

DRAFT

6 Development limitations and mitigation measures

Within the study area, there are no recorded Aboriginal sites that may be subject to harm. The proposed works will therefore not impact on any Aboriginal archaeological sites. The Aboriginal community have indicated that the landscape of the Lane Cove River is culturally significant and has intangible values. Strategies to avoid or minimise harm to Aboriginal cultural heritage values in the study area are discussed below.

6.1 Predicted physical impacts

The proposed works will consist of bulk earthworks and site infrastructure, followed by the construction of a road ways and landscaping. All of these activities will have the potential to impact Aboriginal sites. However, the study area has been subject to cut and fill actions, with much of the original ground surface having been visibly altered. Within the study area, disturbed included the removal of topsoil, construction of buildings within the study area, and the dumping and removal of contaminated fill.

As there are no Aboriginal sites within the study area and the area is highly disturbed the proposed works will not impact on Aboriginal heritage values

6.2 Management and mitigation measures

Ideally, heritage management involves conservation of sites through the preservation and conservation of fabric and context within a framework of 'doing as much as necessary, as little as possible' (Australia ICOMOS 2013). In cases where conservation is not practical, several options for management are available. For sites, management often involves the salvage of features or artefacts, retrieval of information through excavation or collection (especially where impact cannot be avoided) and interpretation.

Avoidance of impact to archaeological and cultural heritage sites through design of the development is the primary mitigation and management strategy, and should be implemented where practicable. However, due to the levels of disturbance, there are no specific management and mitigation measures required. The MLALC identified intangible values in the area, which were associated with the landscape of the Lane Cove River. Therefore, the following mitigation measures are recommended in order to ensure that the proposed works do not further impact on the cultural values of the Lane Cove area. This is in line with the principles of ecologically sustainable development (ESD) and intergenerational equity in their design.

After the completion of the construction of the proposed development, MLALC suggests that landscapes of native vegetation be planted and Gammerraygal names be used in any visual interpretation or signage within the gardens. This will ensure the visual amenity of the area is retained and the acknowledgement of Aboriginal people as the original custodians of the area are recognised.

7 Recommendations

The recommendations below respond specifically to the wishes of the RAPs. Recommendations regarding the archaeological value of the site, and the subsequent management of Aboriginal cultural heritage is provided in the archaeological report (Appendix 6).

Recommendation 1: No further archaeological assessment is required

No further archaeological work is required in the study area due to the entire study area assessed as having low archaeological potential.

Recommendation 2: Landscape design to include Indigenous plants

After the completion of the construction of the proposed development, it is suggested that landscapes of native vegetation be planted and Gammerraygal names be used in any visual interpretation or signage within the gardens. This will ensure the visual amenity of the area is retained and the acknowledgement of Aboriginal people as the original custodians of the area are recognised.

Recommendation 3: Discovery of Unanticipated Aboriginal Objects

All Aboriginal objects and Places are protected under the NPW Act. It is an offence to knowingly disturb an Aboriginal site without a consent permit issued by the OEH. Should any Aboriginal objects be encountered during works associated with this proposal, works must cease in the vicinity and the find should not be moved until assessed by a qualified archaeologist. If the find is determined to be an Aboriginal object the archaeologist will provide further recommendations. These may include notifying the OEH and Aboriginal stakeholders.

Recommendation 4: Discovery of Aboriginal Ancestral Remains

Aboriginal ancestral remains may be found in a variety of landscapes in NSW, including middens and sandy or soft sedimentary soils. If any suspected human remains are discovered during any activity you must:

4. Immediately cease all work at that location and not further move or disturb the remains.
5. Notify the NSW Police and OEH's Environmental Line on 131 555 as soon as practicable and provide details of the remains and their location.
6. Not recommence work at that location unless authorised in writing by OEH.

References

- Allen, J & O'Connell, J 2003, 'The long and the short of it: archaeological approaches to determining when humans first colonised Australia and New Guinea.', *Australian Archaeology*, vol. 57, pp. 5–19.
- Attenbrow, V 2010, *Sydney's Aboriginal Past. Investigating the Archaeological and Historical Records*, University of New South Wales Press Ltd, Sydney NSW.
- Australia ICOMOS 2013, *The Burra Charter: the Australia ICOMOS Charter for Places of Cultural Significance*, Australia ICOMOS, Burwood, VIC.
- BOM 2018, *Climate statistics for Australian locations*, viewed 24 October 2018, <http://www.bom.gov.au/climate/averages/tables/cw_072150.shtml>.
- Bowler, JM et al. 2003, 'New ages for human occupation and climatic change at Lake Mungo, Australia', *Nature*, vol. 421, no. 6925, pp. 837–840.
- Brookes & Associates, Taylor Barner Landscape Architects, & Mary Dallas Consulting Archaeologists 2003, *Mamre St Marys – Conservation Management Plan*.
- Chapman, G & Murphy, C 1989, *Soil Landscapes of the Sydney 1:100,000 sheet*, Soil Conservation Service of NSW, Sydney.
- Clarkson, C et al. 2015, 'The archaeology, chronology and stratigraphy of Madjedbebe (Malakunanja II): A site in northern Australia with early occupation', *Journal of Human Evolution*, vol. 83, no. 0, pp. 46–64.
- Dallas, M 1982, *An Archaeological Survey at Riverstone, Schofields and Quakers Hill, NSW*, Report to the Land Commission of NSW.
- DECCW 2010a, *Aboriginal Cultural Heritage Consultation Requirements for Proponents*, Department of Environment and Climate Change, Sydney NSW.
- DECCW 2010b, *Code of Practice for Archaeological Investigation of Aboriginal Objects in New South Wales*, Department of Environment and Climate Change, Sydney NSW.
- Jo McDonald Cultural Heritage Management Pty Ltd 2000, *Archaeological Survey for Aboriginal Sites: Proposed Light Industrial Subdivision, 'Austral Site', Mamre Road, Erskine Park, NSW. Report to Gunningah Environmental Consultants for Austral Brick Company*.
- Jo McDonald Cultural Heritage Management Pty Ltd 2005a, *Archaeological Salvage Excavation of Site CG1 (NPWS #45-5-2648), at the corner of Charles and George Streets, Parramatta, NSW*, Report to Meriton Apartments Pty Ltd.
- Jo McDonald Cultural Heritage Management Pty Ltd 2005b, *Archaeological Salvage Excavation of Site RTA-G1 109-113 George Street Parramatta, NSW*, Report to Landcom.
- Jo McDonald Cultural Heritage Management Pty Ltd 2006, *Archaeological Salvage Excavation of the Colebee release Area, Schofields, NSW. Draft report prepared for Medallist Developments*.

Jo McDonald Cultural Heritage Management Pty Ltd 2008, *Austral Land Mamre Road , Erskine Park Archaeological Salvage Excavations, Report to Macquarie Goodman*.

Lane Cove Council 2018a, *Aboriginal Heritage*, viewed 25 October 2018, <<http://www.lanecove.nsw.gov.au/Community/AboutLaneCove/Pages/AboriginalHeritage.aspx>>.

Lane Cove Council 2018b, *A Brief History of Lane Cove*, viewed 25 October 2018, <<http://www.lanecove.nsw.gov.au/Community/AboutLaneCove/Pages/History.aspx>>.

OEH 2011, *Guide to Investigating, Assessing and Reporting on Aboriginal Cultural Heritage in NSW*, Office of Environment and Heritage.

Parsons, V 1966, *Ball, Henry Lidgbird (1756–1818)*, *Australian Dictionary of Biography*.

Rhodes, J & Dunnett, G 1985, *Aboriginal Resources Planning Study: City of Penrith*, National Parks & Wildlife Service, Sydney. NSW.

Rosen, S 1995, *Heritage Assessment for Nepean Tunnel Amplification Project*, Sydney Water.

Strahler, A 1964, 'Quantitative geomorphology of drainage basins and channel networks', in V Chow (ed.), *Handbook of Applied Hydrology*, McGraw-Hill, New York.

Tindale, N 1974, *Aboriginal Tribes of Australia*, University of California Press, Berkeley.

White, B & McDonald, J 2010, 'Lithic Artefact Distribution in the Rouse Hill Development Area', *Australian Archaeology*, vol. 70, pp. 29–38.

Appendices

DRAFT

Appendix 1 Consultation log

Stage 1 – Notification of project proposal and registration of interest

Step 1- Identification of Aboriginal people/parties with an interest in the proposed study area.

Organisation contacted	Date and type of contact	Date and type of response	Response details
OEH Greater Sydney Office	29/1/2019 – email	1/2/2019 – email	Provided a list of Aboriginal stakeholder groups for the Lane Cove region.
Native Title Services CORP Limited	29/1/2019 – email	–	–
Office of the Registrar, Department of Aboriginal Affairs	29/1/2019 – email	6/2/2019	The study area described does not have Registered Aboriginal Owners.
Greater Sydney Local Land Services	29/1/2019 – email	–	–
Metropolitan Local Aboriginal Land Council	29/1/2019 – email	5/2/2019 – email	Wanted to be included in the project and registered an interest.
Lane Cove Council	29/1/2019 – email	–	–
National Native Title Tribunal	29/1/2019 – email	31/1/2019 – email	No native title registered in the study area.

Step 2- Public advertisement

The public notice was published in the *Daily Telegraph* on the 30 January 2019. A copy of the advertisement is provided in Appendix 2.

Step 3- Registration of interest.

The registration period ran from the 4 to 18 February 2019. Leeway was given to Aboriginal parties/groups who provided responses shortly after the close of this period and they have been registered as Aboriginal parties for consultation.

Organisation contacted	Date and type of contact	Date and type of response	Response details
Darug Land Observations	4/2/2019 – email	5/2/2019 – email	Registered an interest
A1 Indigenous Services	4/2/2019 – email	5/2/2019 – email	Registered an interest
Eric Keidge	4/2/2019 – email	–	–
Tocomwall	4/2/2019 – email	4/2/2019 – email	Registered an interest
Amanda Hickey Cultural Services	4/2/2019 – email	4/2/2019 – email	Registered an interest
Gunyyuu	4/2/2019 – email	11/2/2019 – email	Registered an interest

Organisation contacted	Date and type of contact	Date and type of response	Response details
Walbunja	4/2/2019 – email	11/2/2019 – email	Registered an interest
Badu	4/2/2019 – email	11/2/2019 – email	Registered an interest
Goobah Developments	4/2/2019 – email	12/2/2019 – email	Registered an interest
Wullung	4/2/2019 – email	–	–
Yerramurra	4/2/2019 – email	12/2/2019 – email	Registered an interest
Nundagurri	4/2/2019 – email	11/2/2019 – email	Registered an interest
Murrumbul	4/2/2019 – email	11/2/2019 – email	Registered an interest
Jerringong	4/2/2019 – email	–	–
Pemulwuy CHTS	4/2/2019 – email	–	–
Bilinga	4/2/2019 – email	11/2/2019 – email	Registered an interest
Munyunga	4/2/2019 – email	11/2/2019 – email	Registered an interest
Wingikara	4/2/2019 – email	12/2/2019 – email	Registered an interest
Minnamunning	4/2/2019 – email	–	–
Walgalu	4/2/2019 – email	12/2/2019 – email	Registered an interest
Thauaira	4/2/2019 – email	12/2/2019 – email	Registered an interest
Dharug	4/2/2019 – email	11/2/2019 – email	Registered an interest
Bilinga Cultural Heritage Technical Services	4/2/2019 – email	–	–
Gunyu Cultural Heritage Technical Services	4/2/2019 – email	–	–
Munyunga Cultural Heritage Technical Services	4/2/2019 – email	–	–
Murrumbul Cultural Heritage Technical Services	4/2/2019 – email	–	–
Wingikara Cultural Heritage Technical Services	4/2/2019 – email	–	–
Gulaga	4/2/2019 – email	–	–
Biamanga	4/2/2019 – email	–	–
Callendulla	4/2/2019 – email	–	–
Murramarang	4/2/2019 – email	–	–
DJMD Consultancy	4/2/2019 – email	–	–

Organisation contacted	Date and type of contact	Date and type of response	Response details
Butucarbin Aboriginal Corporation	4/2/2019 – email	–	–
Didge Ngunawal Clan	4/2/2019 – email	–	–
Ginninderra Aboriginal Corporation	4/2/2019 – email	–	–
Nerrigundah	4/2/2019 – email	–	–
Wailwan Aboriginal Group	4/2/2019 – email	–	–
Barking Owl Aboriginal Corporation	4/2/2019 – email	–	–
Thoorga Nura	4/2/2019 – email	–	–
Darug Boorooberongal Elders Aboriginal Corporation	4/2/2019 – email	5/2/2019 – email	Registered an interest
B. H. Heritage Consultants	4/2/2019 – email	5/2/2019 – email	Registered an interest
Ngambaa Cultural Connections	4/2/2019 – email	–	–
Barraby Cultural Services	–	31/1/2019 – email	Registered an interest
Yulay Cultural Services	–	31/1/2019 – email	Registered an interest
Yurrandaali Cultural Services	–	31/1/2019 – email	Registered an interest
Bullawaya	–	11/2/2019 – email	Registered an interest
Eora	–	11/2/2019 – email	Registered an interest
Elouera	–	11/2/2019 – email	Registered an interest
Djiringanj	–	11/2/2019 – email	Registered an interest
Curwur Murre	–	11/2/2019 – email	Registered an interest
Bidawal	–	11/2/2019 – email	Registered an interest
Tharawal	–	11/2/2019 – email	Registered an interest
Gangangarra	–	11/2/2019 – email	Registered an interest
Kuringgai	–	12/2/2019 – email	Registered an interest
Murrin	–	12/2/2019 – email	Registered an interest
Ngarigo	–	12/2/2019 – email	Registered an interest
Walbunja Elders	–	12/2/2019 – email	Registered an interest
Gulla Gunar	–	12/2/2019 – email	Registered an interest
Golangaya	–	12/2/2019 – email	Registered an interest

Organisation contacted	Date and type of contact	Date and type of response	Response details
Gadung	–	12/2/2019 – email	Registered an interest
Bulling Gang	–	12/2/2019 – email	Registered an interest
Wandandia	–	12/2/2019 – email	Registered an interest
Thauaira	–	12/2/2019 – email	Registered an interest

Stage 2 – Presentation of information about the proposed project

Step 1- Provision of project information pack

A copy of the information pack is provided in Appendix 3 and a copy of the covering email is provided following.

Organisation contacted	Date and type of contact	Date and type of response	Response details
Darug Land Observations	19/2/2019 – email	–	–
A1 Indigenous Services	19/2/2019 – email	–	–
Tocomwall	19/2/2019 – email	–	–
Amanda Hickey Cultural Services	19/2/2019 – email	–	–
Gunyu	19/2/2019 – email	–	–
Walbunja	19/2/2019 – email	–	–
Badu	19/2/2019 – email	–	–
Goobah Developments	19/2/2019 – email	–	–
Yerramurra	19/2/2019 – email	–	–
Nundagurri	19/2/2019 – email	–	–
Murrumbul	19/2/2019 – email	–	–
Bilinga	19/2/2019 – email	–	–
Munyunga	19/2/2019 – email	–	–
Wingikara	19/2/2019 – email	–	–
Walgau	19/2/2019 – email	–	–
Thauaira	19/2/2019 – email	–	–
Dharug	19/2/2019 – email	–	–
Darug Boorooberongal Elders Aboriginal Corporation	19/2/2019 – email	–	–
B. H. Heritage Consultants	19/2/2019 – email	–	–

Organisation contacted	Date and type of contact	Date and type of response	Response details
Barraby Cultural Services	19/2/2019 – email	–	–
Yulay Cultural Services	19/2/2019 – email	–	–
Yurrandaali Cultural Services	19/2/2019 – email	–	–
Bullawaya	19/2/2019 – email	–	–
Eora	19/2/2019 – email	–	–
Elouera	19/2/2019 – email	–	–
Djiringanj	19/2/2019 – email	–	–
Curwur Murre	19/2/2019 – email	–	–
Bidawal	19/2/2019 – email	–	–
Tharawal	19/2/2019 – email	–	–
Gangangarra	19/2/2019 – email	–	–
Kuringgai	19/2/2019 – email	–	–
Murrin	19/2/2019 – email	–	–
Ngarigo	19/2/2019 – email	–	–
Walbunja Elders	19/2/2019 – email	–	–
Gulla Gunar	19/2/2019 – email	–	–
Golangaya	19/2/2019 – email	–	–
Gadung	19/2/2019 – email	–	–
Bulling Gang	19/2/2019 – email	–	–
Wandandia	19/2/2019 – email	–	–

Stage 3 – Gathering information about cultural significance

Step 1- Provision of project methodology pack and consultation meeting

A copy of the methodology pack is provided in Appendix 4 and a copy of the covering email is provided following.

Organisation contacted	Date and type of contact	Date and type of response	Response details
Darug Land Observations	19/2/2019 – email	6/3/2019 – email	Supports the methodology
A1 Indigenous Services	19/2/2019 – email	23/2/2019 – email	Supports the methodology
Tocomwall	19/2/2019 – email	–	–
Amanda Hickey Cultural Services	19/2/2019 – email	–	–

Organisation contacted	Date and type of contact	Date and type of response	Response details
Gunyu	19/2/2019 – email	–	–
Walbunga	19/2/2019 – email	–	–
Badu	19/2/2019 – email	–	–
Goobah Developments	19/2/2019 – email	–	–
Yerramurra	19/2/2019 – email	–	–
Nundagurri	19/2/2019 – email	–	–
Murrumbul	19/2/2019 – email	–	–
Bilinga	19/2/2019 – email	–	–
Munyunga	19/2/2019 – email	–	–
Wingikara	19/2/2019 – email	–	–
Walgalu	19/2/2019 – email	–	–
Thauaira	19/2/2019 – email	–	–
Dharug	19/2/2019 – email	–	–
B. H. Heritage Consultants	19/2/2019 – email	–	–
Darug Boorooberongal Elders Aboriginal Corporation	19/2/2019 – email	19/2/2019 – email	Supports the methodology
Barraby Cultural Services	19/2/2019 – email	21/2/2019 – email	Supports the methodology
Yulay Cultural Services	19/2/2019 – email	21/2/2019 – email	Supports the methodology
Yurrandaali Cultural Services	19/2/2019 – email	21/2/2019 – email	Supports the methodology
Bullawaya	19/2/2019 – email	–	–
Eora	19/2/2019 – email	–	–
Elouera	19/2/2019 – email	–	–
Djiringanj	19/2/2019 – email	–	–
Curwur Murre	19/2/2019 – email	–	–
Bidawal	19/2/2019 – email	–	–
Tharawal	19/2/2019 – email	–	–
Gangangarra	19/2/2019 – email	–	–
Kuringgai	19/2/2019 – email	–	–
Murrin	19/2/2019 – email	–	–
Ngarigo	19/2/2019 – email	–	–

Organisation contacted	Date and type of contact	Date and type of response	Response details
Walbunja Elders	19/2/2019 – email	–	–
Gulla Gunar	19/2/2019 – email	–	–
Golangaya	19/2/2019 – email	–	–
Gadung	19/2/2019 – email	–	–
Bulling Gang	19/2/2019 – email	–	–
Wandandia	19/2/2019 – email	–	–

Step 2- Field survey

Organisation contacted	Date and type of contact	Date and type of response	Response details
Metropolitan Local Aboriginal Land Council	20/11/2018 – email	20/11/2018 – email	One representative from MLALC can attend

Stage 4 – Review of draft report

Step 1- Provision of draft report for review *(to be completed following 28 day review period)*

Organisation contacted	Date and type of contact	Date and type of response	Response details

Appendix 2 Stage 1: Notification of project proposal and registration of interest

DRAFT

Appendix 3 Stage 2: Presentation of information about the proposed project

DRAFT

Appendix 4 Stage 3: Gathering information about cultural significance

DRAFT

Appendix 5 Stage 4: Review of draft cultural heritage assessment report

DRAFT

Appendix 6 Archaeological report

DRAFT

A landscape photograph showing a green field in the foreground, a dense line of trees in the middle ground, and a city skyline with several tall buildings in the background under a cloudy sky. The image is partially covered by a large blue and green abstract shape at the bottom.

1 Sirius Road, Lane Cove: Archaeological report

DRAFT REPORT

Prepared for Greenbox Architecture

9 April 2019

Biosis offices

NEW SOUTH WALES

Newcastle

Phone: (02) 4911 4040

Email: newcastle@biosis.com.au

Sydney

Phone: (02) 9101 8700

Email: sydney@biosis.com.au

Wollongong

Phone: (02) 4201 1090

Email: wollongong@biosis.com.au

Albury

Phone: (02) 6069 9200

Email: albury@biosis.com.au

VICTORIA

Melbourne

Phone: (03) 8686 4800

Email: melbourne@biosis.com.au

Ballarat

Phone: (03) 5304 4250

Email: ballarat@biosis.com.au

Wangaratta

Phone: (03) 5718 6900

Email: wangaratta@biosis.com.au

Document information

Report to: Greenbox Architecture

Prepared by: Samantha Keats
Anthea Vella

Biosis project no.: 29387

File name: 29387.Sirius Road.Lane.Cove.AR.DFT00.20190205

Citation: Biosis (2019). 1 Sirius Road, Lane Cove: Archaeological report. Report for Greenbox Architecture. Authors: S Keats & A Vella, Biosis Pty Ltd, Wollongong. Project no. 29387

LGA: Lane Cove

Document control

Version	Internal reviewer	Date issued
Draft 01	Taryn Gooley	19/03/2019
Final 01	To be confirmed	TBC

© Biosis Pty Ltd

This document is and shall remain the property of Biosis Pty Ltd. The document may only be used for the purposes for which it was commissioned and in accordance with the Terms of the Engagement for the commission. Unauthorised use of this document in any form whatsoever is prohibited.

Disclaimer:

Biosis Pty Ltd has completed this assessment in accordance with the relevant federal, state and local legislation and current industry best practice. The company accepts no liability for any damages or loss incurred as a result of reliance placed upon the report content or for any purpose other than that for which it was intended.

Contents

Glossary.....	V
Summary	VI
1 Introduction	1
1.1 Project background	1
1.2 Study area.....	1
1.3 Planning approvals	2
1.4 Objectives of the investigation.....	2
1.5 Investigators and contributors	2
2 Proposed development	6
3 Desktop assessment.....	8
3.1 Landscape context.....	8
3.1.1 Topography and hydrology	8
3.1.2 Soil landscapes	9
3.1.3 Landscape resources	15
3.1.4 Land use history	15
3.2 Previous archaeological work	21
3.2.1 Regional overview	21
3.2.2 Local overview.....	22
3.2.3 AHIMS site analysis	23
3.3 Discussion.....	26
3.3.1 Predictive statement	26
4 Field investigation	29
4.1 Archaeological survey objectives.....	29
4.2 Archaeological survey methodology	29
4.2.1 Survey methods.....	29
4.3 Archaeological survey results.....	29
4.3.1 Constraints to the survey	30
4.3.2 Visibility.....	31
4.4 Exposure	32
4.4.1 Disturbances	34
4.5 Discussion of archaeological survey results	38
5 Scientific values and significance assessment.....	39
5.1 Introduction to the assessment process.....	39
5.2 Archaeological (scientific significance) values.....	40
5.2.1 Statements of archaeological significance	42
6 Impact assessment	44

6.1	Predicted physical impacts	44
6.2	Management and mitigation measures	44
7	Recommendations	45

Tables

Table 1	Investigators and contributors.....	2
Table 2	Gymea soil landscape characteristics (Chapman & Murphy 1989, p.65–66).....	9
Table 3	Disturbed Terrain soil landscape characteristics (Chapman & Murphy 1989, pp.132–134)	10
Table 4	AHIMS site type frequency.....	23
Table 5	Aboriginal site prediction statements.....	26
Table 6	Survey coverage	36
Table 7	Landform summary.....	36
Table 8	Site content ratings.....	40
Table 9	Site condition ratings.....	41
Table 10	Site representativeness ratings.....	42
Table 11	Scientific significance ratings.....	42
Table 12	Scientific significance assessment of archaeological sites recorded within the study area.....	42
Table 13	Statements of scientific significance for the study area	43

Figures

Figure 1	Location of the study area	4
Figure 2	Study area detail	5
Figure 3	Proposed development.....	7
Figure 4	Geological formations in the vicinity of the study area	12
Figure 5	Hydrology and topography in the vicinity of the study area.....	13
Figure 6	Soil landscapes in the vicinity of the study area	14
Figure 7	AHIMS search results.....	25
Figure 8	Survey effort and results.....	37

Plates

Plate 1	Diagram showing Strahler stream order (Ritter et al 1995, p. 151).	9
Plate 2	1833 Crown Plan showing Thomas Moore and Henry O'Briens grants (Source: NSW Land Registry Services, Crown Plan 138.690)	16
Plate 3	1854 Crown Plan showing the three original grants (Source: NSW Land Registry Services, Crown Plan 627.690)	17
Plate 4	Parish Map of Willoughby showing original grants (Source: NSW Land Registry Services, County of Cumberland Parish of Willoughby (sheet 1A)).....	17

Plate 5	Subdivision plan from 1920 showing no development on the study area (Source: Lane Cove Library Local History LHM994.4139/1920/VIC)	18
Plate 6	1943 aerial showing dense vegetation in the majority of the study area and two structures (Source: Land and Property Information).....	19
Plate 7	Current aerial showing cleared land with no structures (Source: Land and Property Information).....	20
Plate 8	View across site to the north-west, showing grass cover.....	30
Plate 9	Contaminated fill dumped on site, view south-east	30
Plate 10	Area of higher visibility associated with disturbance, view south.....	31
Plate 11	Sandstone overhang in the central portion of the study area, view south-east.....	32
Plate 12	Area of exposure associated with drainage channel in the southern portion of the study area, view west	33
Plate 13	Area of exposure associated with a track in the central portion of the study area, view north-east	33
Plate 14	Sandstone surface with gouge marks in the central portion of the study area, view north-west.....	34
Plate 15	Paved area in the southern portion of the study area, view south	35

DRAFT

Glossary

ACHA	Aboriginal Cultural Heritage Assessment
AHIMS	Aboriginal Heritage Information Management System
CBD	Central Business District
Consultation requirements	<i>Aboriginal Cultural Heritage Consultation Requirements for Proponents 2010</i>
DECCW	Department of Environment, Climate Change and Water (now OEH)
DP	Deposited Plan
EP&A Act	<i>Environmental Planning and Assessment Act 1979</i>
GPS	Global Positioning System
GSV	Ground Surface Visibility
ICOMOS	International Council on Monuments and Sites
LALC	Local Aboriginal Land Council
LEP	Local Environmental Plan
LGA	Local Government Area
MGA	Map Grid of Australia
NPW Act	<i>National Parks and Wildlife Act 1974</i>
NPWS	National Parks and Wildlife Service
NSW	New South Wales
OEH	Office of Environment and Heritage
PAD	Potential Archaeological Deposit
Study area	Defined as Lot 1 DP 1151370
SEPP	State Environmental Planning Policy
SSD	State Significant Development
the Code	<i>Code of Practice for Archaeological Investigation of Aboriginal Objects in NSW</i>

Summary

Biosis Pty Ltd (Biosis) was commissioned by Greenbox Architecture to undertake an Aboriginal Cultural Heritage Assessment (ACHA) for the proposed construction of a data centre at 1 Sirius Avenue, Lane Cove New South Wales (NSW) (the study area). The study area is located approximately 3.5 kilometres west of Lane Cove and approximately 8.5 kilometres north west of the Sydney CBD central business district (CBD).

There are 115 Aboriginal cultural heritage sites registered with the Aboriginal Heritage Information Management System (AHIMS) register within the vicinity of the study area. No sites are located within the study area.

The Aboriginal community was consulted regarding the heritage management of the project throughout its lifespan. Consultation has been undertaken as per the process outlined in the *Aboriginal Cultural Heritage Consultation Requirements for Proponents 2010* (DECCW 2010a) (consultation requirements).

A field investigation of the study area consisting of an archaeological survey was conducted on 20 November 2018. The overall effectiveness of the survey for examining the ground for Aboriginal sites was deemed low. This was attributed to vegetation cover restricting ground surface visibility (GSV) combined with a low amount of exposures.

No previously unrecorded Aboriginal cultural heritage sites were identified during the field survey and no areas of (archaeological) sensitivity identified. Owing to the significant disturbances across the study area, there is no potential for development activities to impact Aboriginal sites or areas of (archaeological) sensitivity.

Strategies have been developed based on the archaeological (significance) of cultural heritage relevant to the study area. The strategies also take into consideration:

- Predicted impacts to Aboriginal cultural heritage
- The planning approvals framework
- Current best conservation practice, widely considered to include:
 - The ethos of the Australia International Council on Monuments and Sites (ICOMOS) Burra Charter
 - The *Code of Practice for Archaeological Investigation of Aboriginal Objects in NSW* (DECCW 2010b) (the Code).

The recommendations that resulted from the consultation process are provided below.

Management recommendations

Prior to any development impacts occurring within the study area, the following is recommended:

Recommendation 1: No further archaeological assessment is required

No further archaeological work is required in the study area due to the entire study area being assessed as having low archaeological potential.

Recommendation 2: Landscape design to include Indigenous plants

After the completion of the construction of the proposed development, it is suggested that landscapes of native vegetation be planted and Gammerraygal names be used in any visual interpretation or signage within

the gardens. This will ensure the visual amenity of the area is retained and the acknowledgement of Aboriginal people as the original custodians of the area are recognised.

Recommendation 3: Discovery of Unanticipated Aboriginal Objects

All Aboriginal objects and Places are protected under the NPW Act. It is an offence to knowingly disturb an Aboriginal site without a consent permit issued by the OEH. Should any Aboriginal objects be encountered during works associated with this proposal, works must cease in the vicinity and the find should not be moved until assessed by a qualified archaeologist. If the find is determined to be an Aboriginal object the archaeologist will provide further recommendations. These may include notifying the OEH and Aboriginal stakeholders.

Recommendation 4: Discovery of Aboriginal Ancestral Remains

Aboriginal ancestral remains may be found in a variety of landscapes in NSW, including middens and sandy or soft sedimentary soils. If any suspected human remains are discovered during any activity you must:

1. Immediately cease all work at that location and not further move or disturb the remains.
2. Notify the NSW Police and OEH's Environmental Line on 131 555 as soon as practicable and provide details of the remains and their location.
3. Not recommence work at that location unless authorised in writing by OEH.

1 Introduction

1.1 Project background

Biosis was commissioned by Greenbox Architecture to undertake an ACHA for a proposed development at 1 Sirius Road, Lane Cove NSW. The project is a State Significant Development (SSD 9741), which will consist of a data storage building, electrical substation, ancillary office area, loading docks, associated infrastructure, car parking and landscaping.

Biosis has previously conducted an archaeological survey and associated report for the study area (Biosis 2018). The assessment identified the study area as having low potential for Aboriginal sites to be present, owing primarily to the heavy disturbance and landscape modification across the study area, as well as the landforms within it, with large portions of the study area located across moderate slopes. Other landforms within the study area included ridges and flats; however, it was determined that these areas had been subject to disturbance in the form of cut and fill actions. The Metropolitan Local Aboriginal Land Council (LALC) attended the archaeological survey of the study area on 20 November 2018. Based on discussions held on site with the LALC's Site Officer, both the LALC and Biosis have assessed the study area as holding low potential to contain intact Aboriginal sites. However, the Secretary's Environmental Assessment Requirements (SEARs), along with consultation with OEH, have stipulated that an ACHA is required as part of the SSD application.

This investigation has been carried out under Part 6 of the *National Parks and Wildlife Act 1974* (NPW Act). It has been undertaken in accordance with the *Code of Practice for Archaeological Investigation of Aboriginal Objects in New South Wales* (DECCW 2010b) (the code). The code has been developed to support the process of investigating and assessing Aboriginal cultural heritage by specifying the minimum standards for archaeological investigation undertaken in NSW under the NPW Act. The archaeological investigation must be undertaken in accordance with the requirements of the code.

The *Environmental Planning and Assessment Act 1979* (EP&A Act) includes provisions for local government authorities to consider environmental impacts in land-use planning and decision making. Each Local Government Area (LGA) is required to create and maintain a Local Environmental Plan (LEP) that includes Aboriginal and historical heritage items. Local Councils identify items that are of significance within their LGA, and these items are listed on heritage schedules in the local LEP and are protected under the EP&A Act and *Heritage Act 1977*.

1.2 Study area

The study area is located within Lot 1 DP 1151370 and is approximately 3.5 kilometres west of Lane Cove and approximately 8.5 kilometres north west of the Sydney CBD (Figure 1). It encompasses approximately 4.5 hectares of private land.

The study area is within the:

- Lane Cove Local Government Area (LGA)
- Parish of Willoughby
- County of Cumberland

The study area is bounded by the Lane Cove River to the west, Stringybark Creek to the north, Apollo Place to the south, and Sirius Road to the east (Figure 2).

1.3 Planning approvals

The proposed development will be assessed against Part 5 of the EP&A Act. Other relevant legislation and planning instruments that will inform this assessment include:

- NPW Act
- *National Parks and Wildlife Amendment Act 2010*
- Lane Cove Local Environmental Plan 2009 (LEP)
- Lane Cove Development Control Plan 2010 (DCP)

1.4 Objectives of the investigation

The objectives of the investigation can be summarised as follows:

- To identify and consult with any registered Aboriginal stakeholders and the Metropolitan Local Aboriginal Land Council (LALC).
- To conduct additional background research in order to recognise any identifiable trends in site distribution and location.
- To search statutory and non-statutory registers and planning instruments to identify listed Aboriginal cultural heritage sites within the study area.
- To highlight environmental information considered relevant to past Aboriginal occupation of the locality and associated land use and the identification and integrity/preservation of Aboriginal sites.
- To summarise past Aboriginal occupation in the locality of the study area using ethnohistory and the archaeological record.
- To formulate a model to broadly predict the type and character of Aboriginal sites likely to exist throughout the study area, their location, frequency and integrity.
- To conduct a field survey of the study area to locate unrecorded or previously recorded Aboriginal sites and to further assess the archaeological potential of the study area.
- To assess the significance of any known Aboriginal sites in consultation with the Aboriginal community.
- To identify the impacts of the proposed development on any known or potential Aboriginal sites within the study area.
- To recommend strategies for the management of Aboriginal cultural heritage within the context of the proposed development.

1.5 Investigators and contributors

The roles, previous experience and qualifications of the Biosis project team involved in the preparation of this archaeological report are described below in Table 1.

Table 1 Investigators and contributors

Name and qualifications	Experience summary	Project role
Taryn Gooley	Taryn joined Biosis in 2017 and has over 8 years' experience	• Quality assurance

BASc (Hons - Archaeology)	as an archaeologist. She is currently the Heritage team leader for NSW. In this role Taryn has successfully completed numerous projects throughout the Newcastle, Port Stephens, Lake Macquarie, Hunter Valley, and North Western NSW regions. Taryn has extensive experience in undertaking remote archaeological surveys and large scale archaeological testing and salvage excavation programs. Taryn has participated in and managed a number of long term archaeological programs under Part 4 and Part 5 of the (EP&A Act). Taryn holds a Bachelor Arts and Science (Honours) and is a member of the Australian Archaeology Association and the Australian Institute for Maritime Archaeology.	
Samantha Keats BA (Hons)	Samantha is an archaeologist with Biosis Wollongong office. Samantha has two years' experience as an archaeologist, with a particular research focus on rock art assemblages and ochre in the north-west Kimberley region of Australia. Samantha has experience in conducting desktop assessments, archaeological survey and Aboriginal and historical excavation as well as consulting with Traditional Owners. She has participated in a number of European historical excavations and monitoring programs in NSW and has authored several Statement of Heritage Impact reports and Heritage Assessments.	• Project manager • Aboriginal groups consultation • Report author
Anthea Vella (BArch, MAHM)	Anthea graduated from Flinders University with a Bachelor of Archaeology and has also recently graduated from Flinders University with a Master of Archaeology and Heritage Management. She has experience with desktop assessments, project administration, collating internal and external research, and reporting. Anthea also has experience in Aboriginal test excavations, and Historical excavations.	• Background research


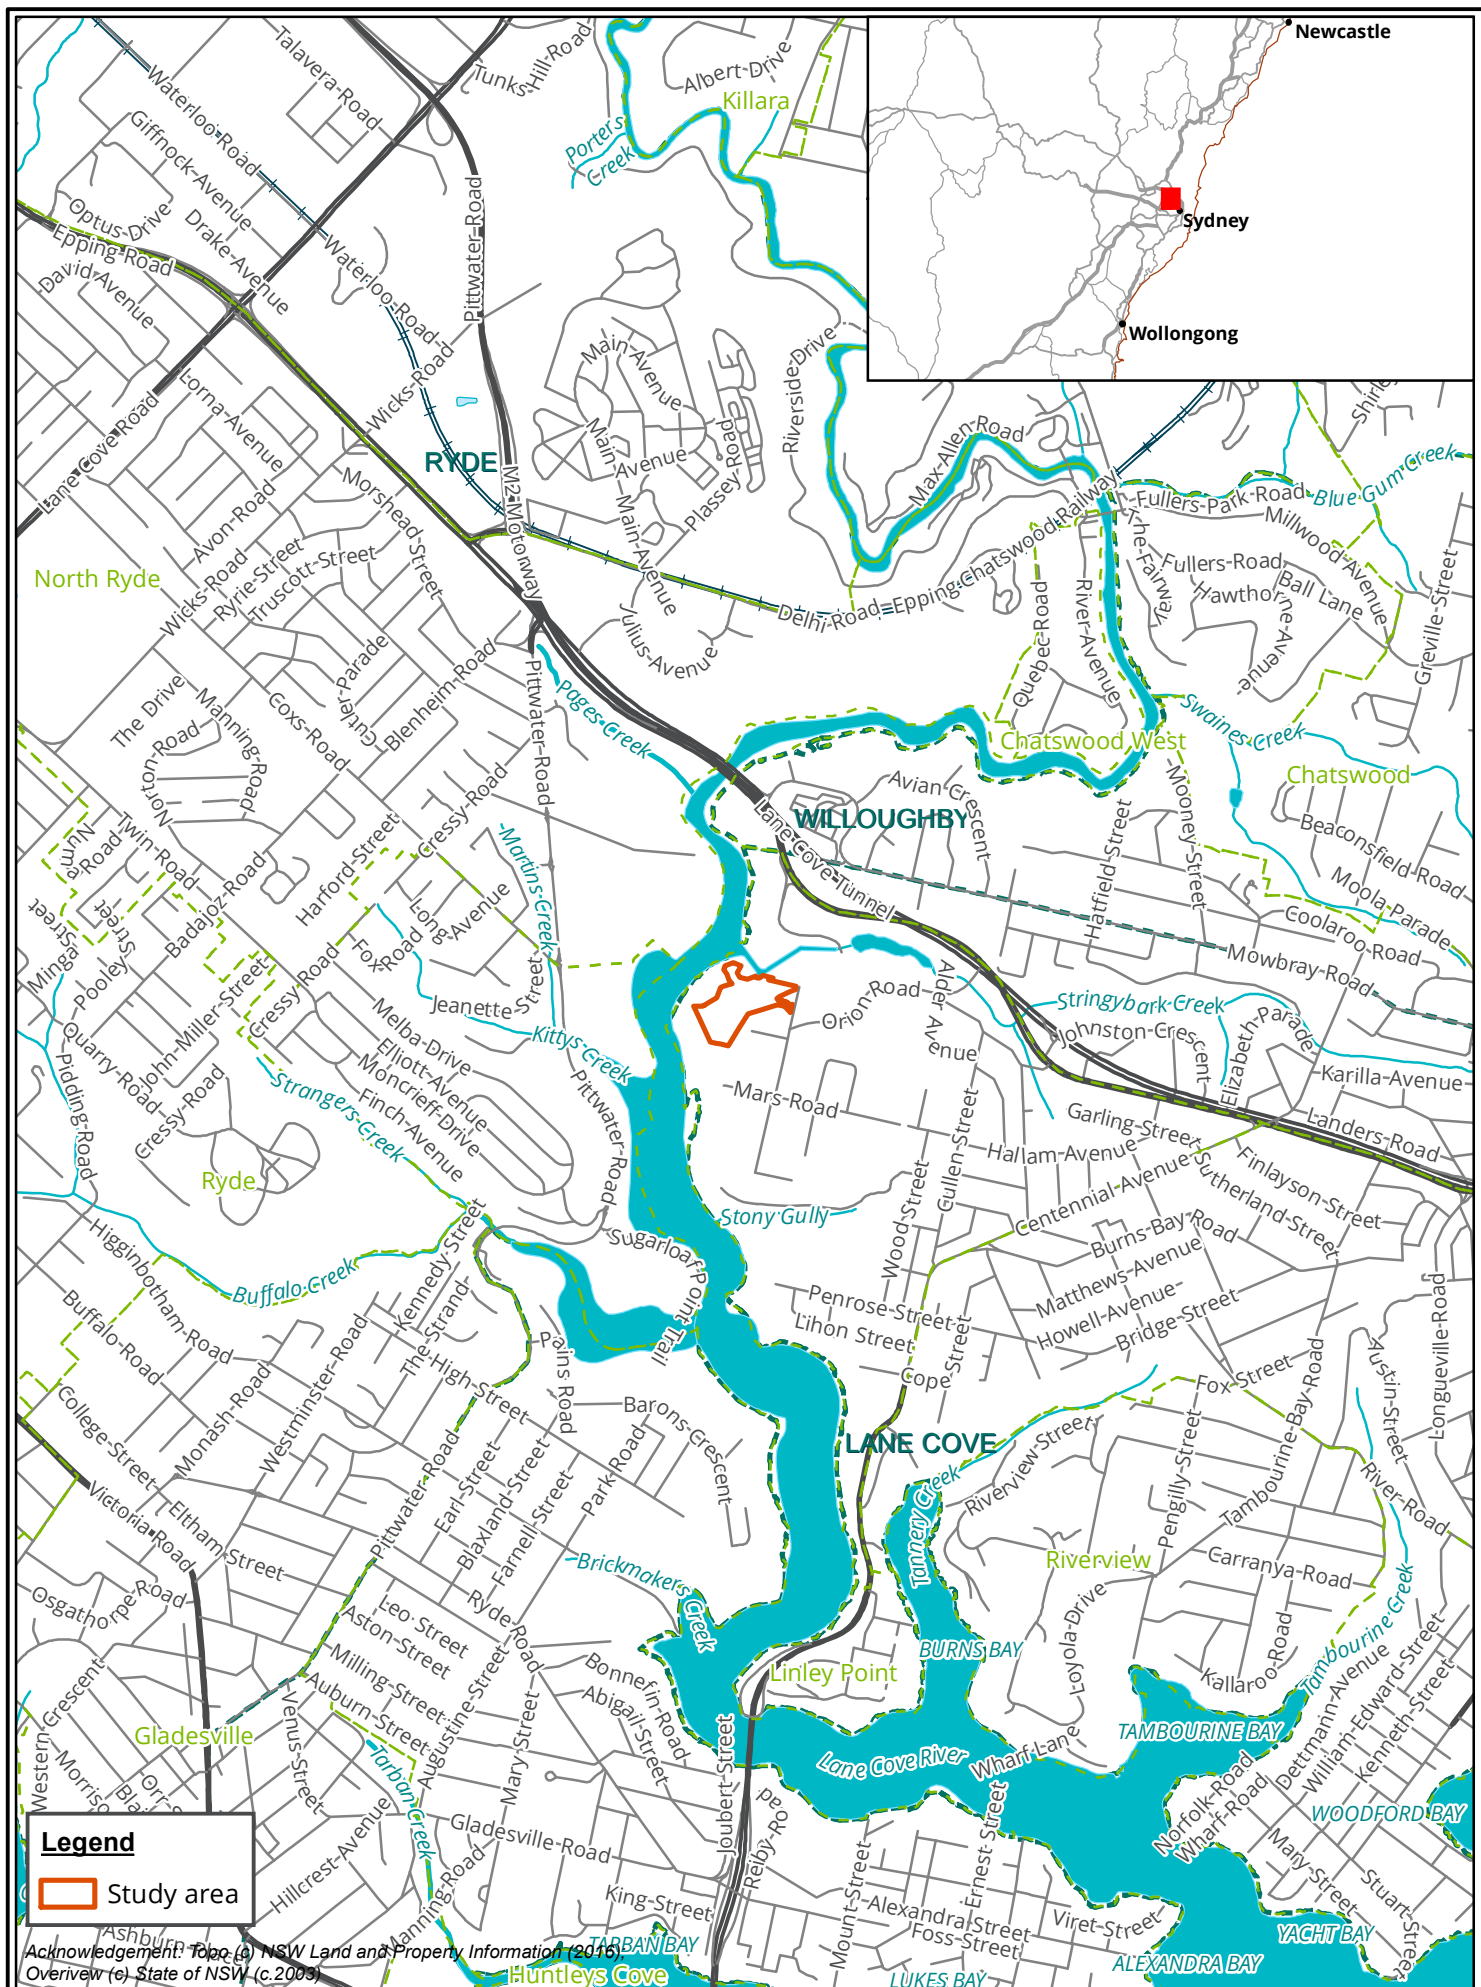


Figure 1 Location of the study area

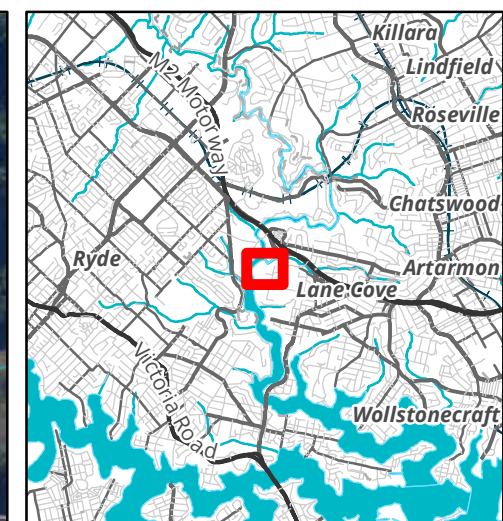

Legend

 Study area

Figure 2: Study area detail

0 20 40 60 80 100
Metres

Scale: 1:2,000 @ A3
Coordinate System: GDA 1994 NSW Lambert

 **biosis.**
Biosis Pty Ltd

Albury, Ballarat, Melbourne,
Newcastle, Sydney, Wangaratta & Wollongong


Matter: 29387
Date: 05 February 2019,
Checked by: AV, Drawn by: AEDM, Last edited by: amurray
Location: P:\29300s\29387\Mapping\29387_F2_StudyArea

2 Proposed development

The proposed development within will consist of the construction and operation of the Lane Cove West Data Centre, comprising (Figure 3):

- A data storage building (approximately 35,144 m²).
- An electrical substation.
- Ancillary office area and loading docks.
- Site-wide earthworks and vegetation clearing.
- Associated infrastructure, car parking and landscaping.

DRAFT



Project Manager

Services Design

+61 2 8069 8930

LEVEL 25
25 LIGHT STREET
SYDNEY NSW 2000 AUSTRALIA

GREENBOX ARCHITECTURE PTY LTD
ABN: 79 139 779 098

ISO 9001 CERTIFIED QUALITY SYSTEM

- The written dimensions only
 do not scale from drawing
 Contractors shall confirm all dimensions on-site prior
 to commencing any work or producing any shop
 drawings
 All materials to be used in accordance with the
 manufacturer's specifications and instructions and
 shall comply with the relevant Australian Standards
 The copyright of this drawing and design remain the
 property of Greenobc Architecture Pty Ltd
 Dominated Architect - Gerard Page: NSW reg
 0.7247, NZ reg No.3715, Vic reg No.17664, SA
 No.3061, QLD reg No.4538, WA reg No.2489

nt

TSYD2
SIRIUS ROAD LANE COVE WEST

Scale
1 : 500 @ A1

Checked By W	Approved By AO
-----------------	-------------------

Job Number	180095
------------	--------

SD

MASTER PLAN

Drawing Number	Issue
TSYD2_SSD_DRG_ARC_0050	1



3 Desktop assessment

The desktop assessment involves researching and reviewing existing archaeological studies and reports relevant to the study area and surrounding region. This information is combined to develop an Aboriginal site prediction model for the study area, and to identify known Aboriginal sites and/or places recorded in the study area. This desktop assessment has been prepared in accordance with requirements 1 to 4 of the Code.

3.1 Landscape context

It is important to consider the local environment of the study area any heritage assessment. The local environmental characteristics can influence human occupation and associated land use and consequently the distribution and character of cultural material. Environmental characteristics and geomorphological processes can affect the preservation of cultural heritage materials to varying degrees or even destroy them completely. Lastly landscape features can contribute to the cultural significance that places can have for people.

3.1.1 Topography and hydrology

The study area is located within the Hawkesbury Sandstone formation and consists of friable medium to coarse grained quartz sandstone with some shale and laminate lenses. It weathers cavernously to form overhangs, which occur in a range of topographic locations. It also occurs as flat topped outcrops (platforms of varying sizes) and boulders, mainly on ridge tops but also along the sides of gullies and in valley bottoms (JMCHM 2008). The presence of sandstone cropping in areas of the Hawkesbury Sandstone formation gives rise to the potential for site types such as rock shelters and engraving sites. The topography consists of undulating to rolling low hills with a local relief of 20 to 80 metres and slopes of between 10% and 20%. Side slopes occur with narrow to wide outcropping of sandstone rock benches of 10 to 20 metres, often forming broken scarps of less than 5 metres (Chapman & Murphy 1989, p.64). The geological formations associated with the study area are identified within Figure 4.

Stream order is recognised as a factor which assists the development of predictive modelling in Sydney Basin Aboriginal archaeology, and has seen extensive use in the Sydney region, most notably by Jo McDonald Cultural Heritage Management (JMCHM 2000, JMCHM 2005a, JMCHM 2005b, JMCHM 2006, JMCHM 2008). Predictive models which have been developed for the region have a tendency to favour higher order streams as the locations of campsites, as they would have been more likely to provide a stable source of water, and by extension other resources which would have been used by Aboriginal groups.

The stream order system used for this assessment was originally developed by Strahler in 1952 (Strahler 1964). It functions by adding two streams of equal order at their confluence to form a higher order stream, as shown in Plate 1. As stream order increases, so does the likelihood that the stream would be a perennial source of water.

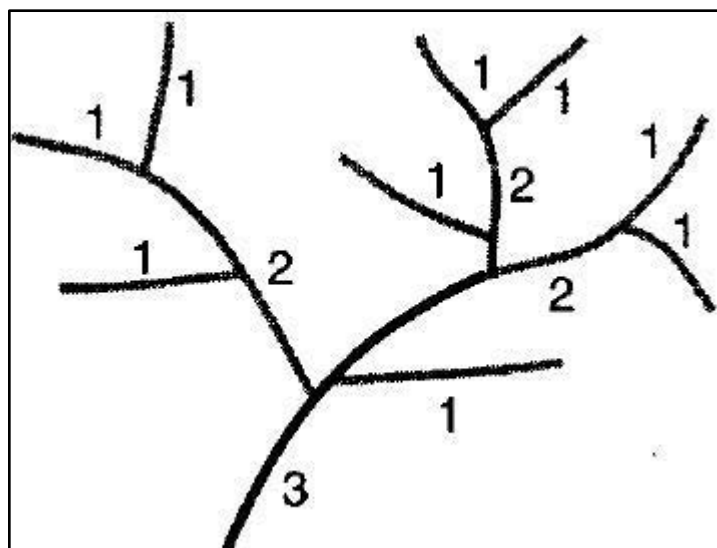


Plate 1 Diagram showing Strahler stream order (Ritter et al 1995, p. 151).

The nearest watercourse to the study area is Lane Cove River, a perennial watercourse located 31 metres away at its closest point. The river encompasses the western side of the study area. Stringybark Creek is also located adjacent to the study area along the northern boundary and is also a perennial watercourse but has been heavily modified where it meets the Lane Cove River (Figure 5). These watercourses would have provided excellent resources for Aboriginal people.

3.1.2 Soil landscapes

Soil landscapes have distinct morphological and topological characteristics that result in specific archaeological potential. They are defined by a combination of soils, topography, vegetation and weathering conditions. Soil landscapes are essentially terrain units that provide a useful way to summarise archaeological potential and exposure.

Two soil landscapes are present within the study area; the GyMEA Soil Landscape and Disturbed Terrain. The GyMEA soil landscape is characterised as an erosional soil landscape and consists of shallow uniform sands and earthy sands on ridges, and deeper sands, loamy sands and organic sands on wet benches. In hanging swamps, grey or yellow texture-contrast soils are present on shale benches. Accumulations of deeper sand and occasional podsoles in depositional sites and along streams. As the soil landscape is characterised as highly erosional, the soil can be shallow and highly permeable, as well as producing low soil fertility. This would indicate that the presence of Aboriginal sites and objects is unlikely.

Disturbed terrain is present within the northern portion of the study area. It is characterised as landscapes extensively disturbed by human activity and development, including, but not limited to; complete disturbance, removal of top soil or burial of soil. The landscape includes soil, rock and building materials and usually occurs throughout areas near watercourses or within areas of previous swamps, estuaries or wetlands. Local relief is usually greater than 2 metres, up to 10 metres. Most areas have heavily disturbed ground and are often landscaped and artificially drained.

The soil landscapes associated with the study area are identified within Table 2, Table 3 and Figure 6.

Table 2 GyMEA soil landscape characteristics (Chapman & Murphy 1989, p.65–66)

Soil material	Description
GyMEA 1 (gy1)	Loamy sand to sandy loam with loose, apedal single-grained structure and porous



Soil material	Description
	sandy fabric. It generally occurs as topsoil (A1 horizon). The colour often becomes lighter with depth, ranging from brownish-black 10YR 2/2 to bleached dull yellow-orange (10YR 7/2). It is often water repellent under native vegetation. The pH ranges from strongly acidic to slightly acidic. Small sandstone and platy ironstone fragments, charcoal fragments and roots are common in this soil level.
Gymea 2 (gy2)	Consists of earthy, yellowish-brown clayey sand, with apedal massive structure and porous earthy fabric. It commonly occurs as subsoil over sandstone bedrock (B horizon). Exposure at the surface creates a hard setting topsoil. Potential to increase gradually to a light sandy clay loam with depth. Colour is commonly yellowish-brown (10YR 6/8), with orange mottles occasionally present with depth. The pH ranges from strongly acidic to slightly acidic. Sandstone and ironstone fragments are common and are often concentrated in stone lines in the upper parts of this material. Charcoal fragments are common, whilst roots are rare.
Gymea 3 (gy3)	Consists of earthy to weakly pedal, yellowish-brown sandy clay loam. Commonly a yellowish-brown sandy clay loam to sandy clay with an apedal massive structure and an earthy porous fabric. It usually occurs as subsoil (B or C horizon) on coarse sandstone. Texture may increase gradually with depth to sandy clay. Occasionally sub-angular blocky shaped peds are present. Peds are commonly rough-faced and porous and range in size from 5-20 millimetres. Colour is commonly yellowish brown (10YR 5/8, 6/6, 6/8; 2.5Y5/6, 5/4). Orange mottles may occur with depth. The pH ranges from strongly acidic to slightly acidic. Strongly weathered sandstone fragments are common, with roots and charcoal fragments being rare.
Gymea 4 (gy4)	Moderately to strongly pedal, yellowish-brown clay. This is commonly a yellowish-brown sandy clay or light clay with a moderately to strongly pedal structure and either a smooth or rough-faced ped fabric. This material occurs as subsoil on shale bedrock (Band C horizons). Peds ranging in size from 5-50 millimetres, are either smooth or rough-faced and are polyhedral to sub-angular blocky. Colour is commonly yellow-brown (10YR 6/6), but can vary from dark reddish brown (2.5YR3/6) to light grey (7.5YR8/1). Red, orange and grey mottles are occasionally present at depth. The pH ranges from strongly acidic to slightly acidic. Shale and ironstone fragments are often present but charcoal fragments are absent and roots are rare.

Table 3 Disturbed Terrain soil landscape characteristics (Chapman & Murphy 1989, pp.132–134)

Soil material	Description
Disturbed Terrain 1 (xx1)	Loose black sandy loam. A black loamy sand to loam-fine-sandy with a loose apedal single-grained structure and sandy fabric. It is used for topsoiling turf and often corresponds to the lowland Nepean River alluvium or Elderslie soil series. Local sands have also been used for topdressing. This material occurs as topsoil (A1 horizon). The material is brittle when dry and crumbly when moist. The colour ranges from a dark brown to black (10YR 3/3-10YR 2/1) or brown (10YR 4/6). It is often water repellent and a surface crust may be present. The pH ranges from moderately acidic to neutral. Roots are common to abundant when turfed and ironstone nodules are occasionally present.
Disturbed Terrain 2 (xx2)	This is a mottled, compacted sandy clay loam to medium clay with an apedal massive to moderately pedal structure. It generally has been compacted to form an

Soil material	Description
	impermeable isolating cap over hazardous buried materials. Peds when present are often platy and smooth-faced. The pH and colour of the soil is highly variable, ranging from extremely acidic to slightly alkaline. Ironstones are occasionally present and roots are absent.
Disturbed Terrain 3 (xx3)	This material is commonly referred to as fill and may consist of any type of soil or regolith material. It often includes demolition rubble and industrial and household wastes. Identifiable features such as colour, pH, and structure vary markedly.
Disturbed Terrain 4 (xx4)	This material consists of dark dredged sands, sandy loams to silty clay loams and sandy clays with apedal single-grained to massive structure and sandy fabric. This material occurs as subsoil. Colour varies from black (10YR 2/1) to a yellowish-brown (2.5Y 5/2). Charcoal, shells or shell fragments are commonly present. This material swells, is highly saline and neutral to moderately alkaline when first dredged, but with drainage and oxidation the salinity levels drop and acidity may increase dramatically.

DRAFT

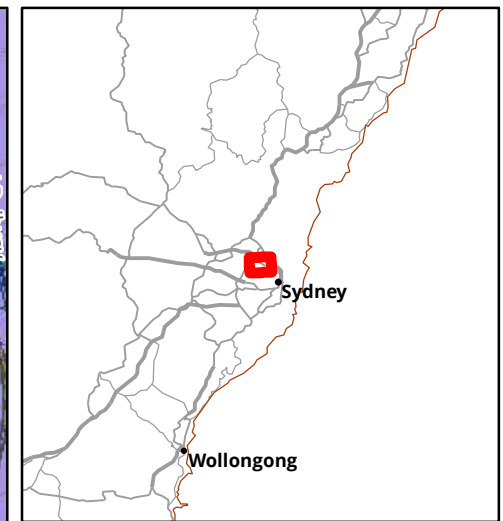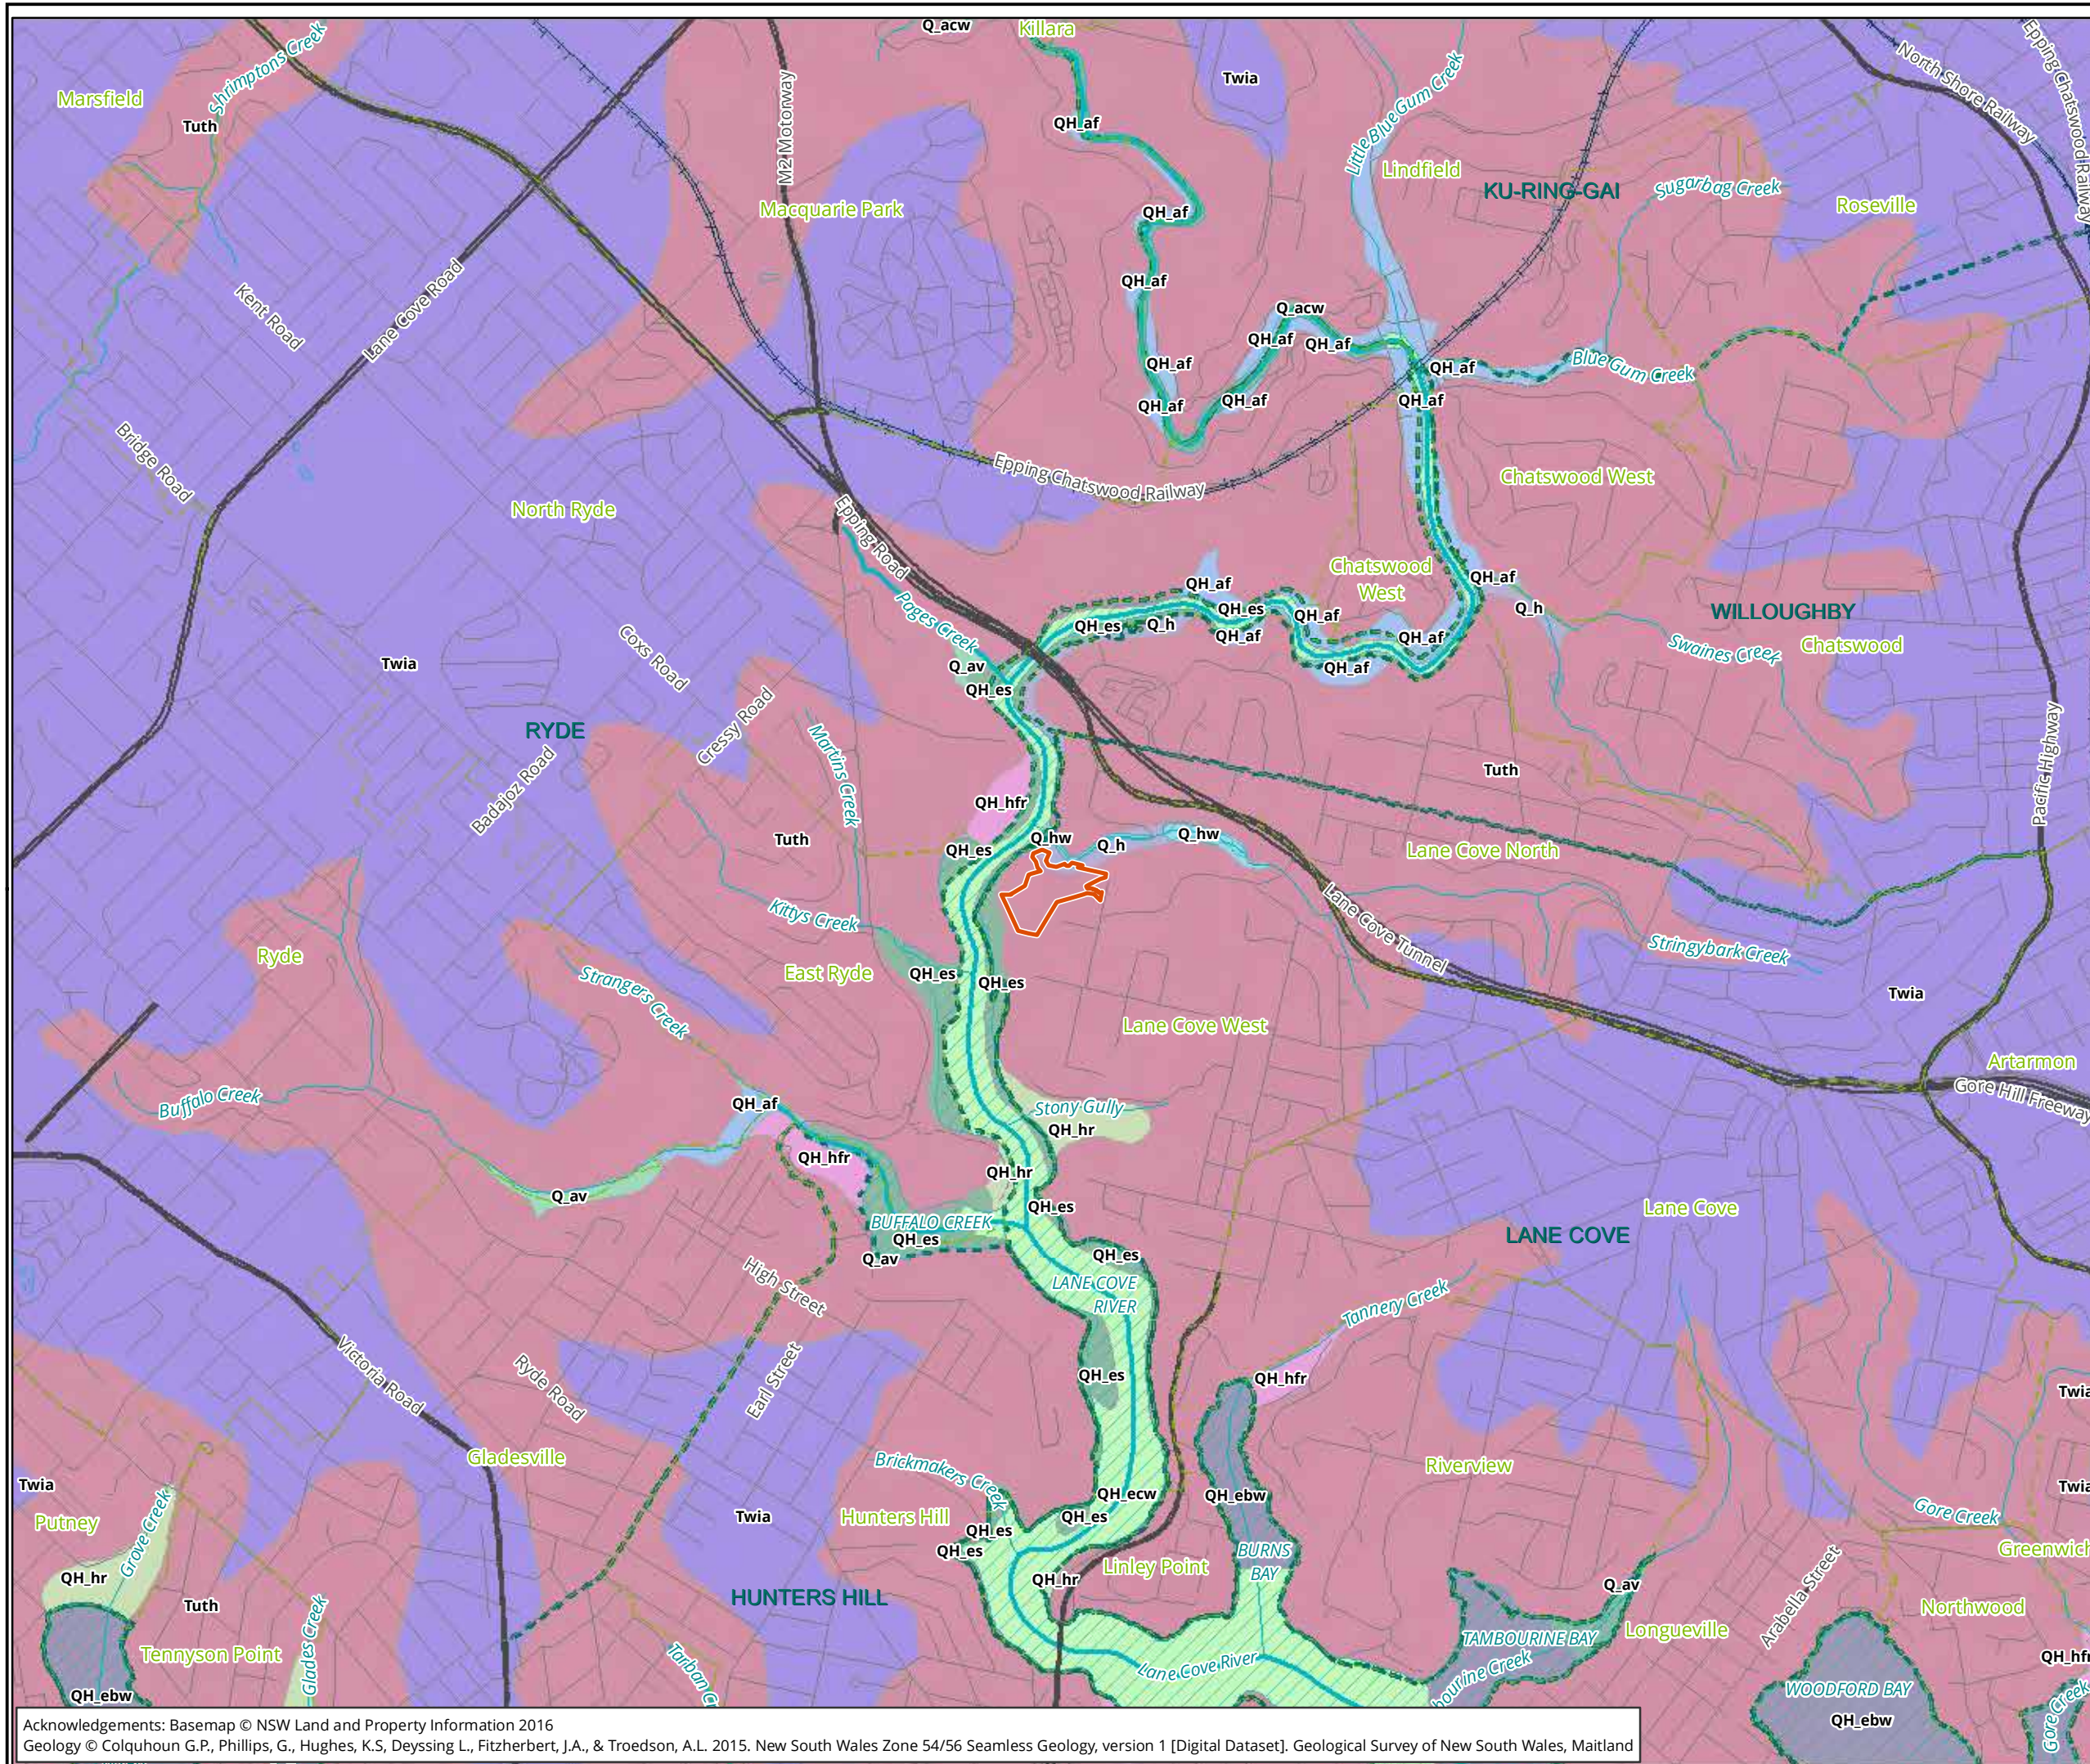

Legend

Study area

Geological Units

- Q_acw - Alluvial channel deposits-
- Q_av - Alluvial valley deposits
- Q_h - Anthropogenic deposits
- Q_hw - Anthropogenic stored water, QH_af - Alluvial floodplain deposits
- QH_ebw - Estuarine basin and bay (subaqueous)
- QH_ecw - Estuarine channel deposits (subaqueous)
- QH_es - Estuarine swamp
- QH_hfr - Anthropogenic deposits-Fill on Quaternary deposits
- QH_hr - Anthropogenic deposits-Reclaimed estuarine areas
- Tuth - Hawkesbury Sandstone
- Twia - Ashfield Shale



Figure 4 Geological formations in the vicinity of the study area

0 200 400 600 800 1,000
Metres

Scale: 1:20,000 @ A3
Coordinate System: GDA 1994 NSW Lambert

 **biosis.**
Biosis Pty Ltd
Albury, Ballarat, Melbourne,
Sydney, Newcastle, Wangaratta & Wollongong

Matter: 29387,
Date: 05 February 2019,
Checked by: AV, Drawn by: AEDM, Last edited by: amurray
Location: P:\29300s\29387\Mapping\29387_F4_Geology.mxd

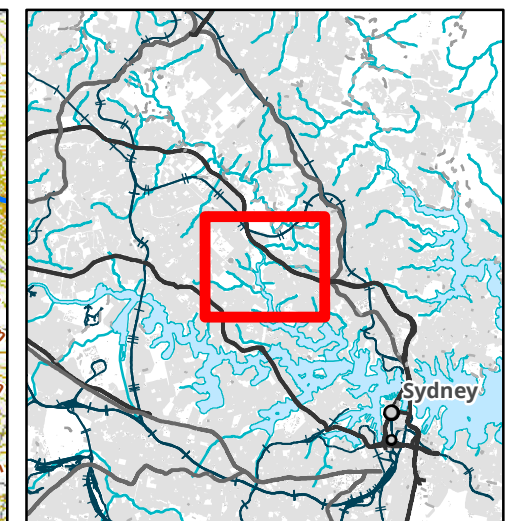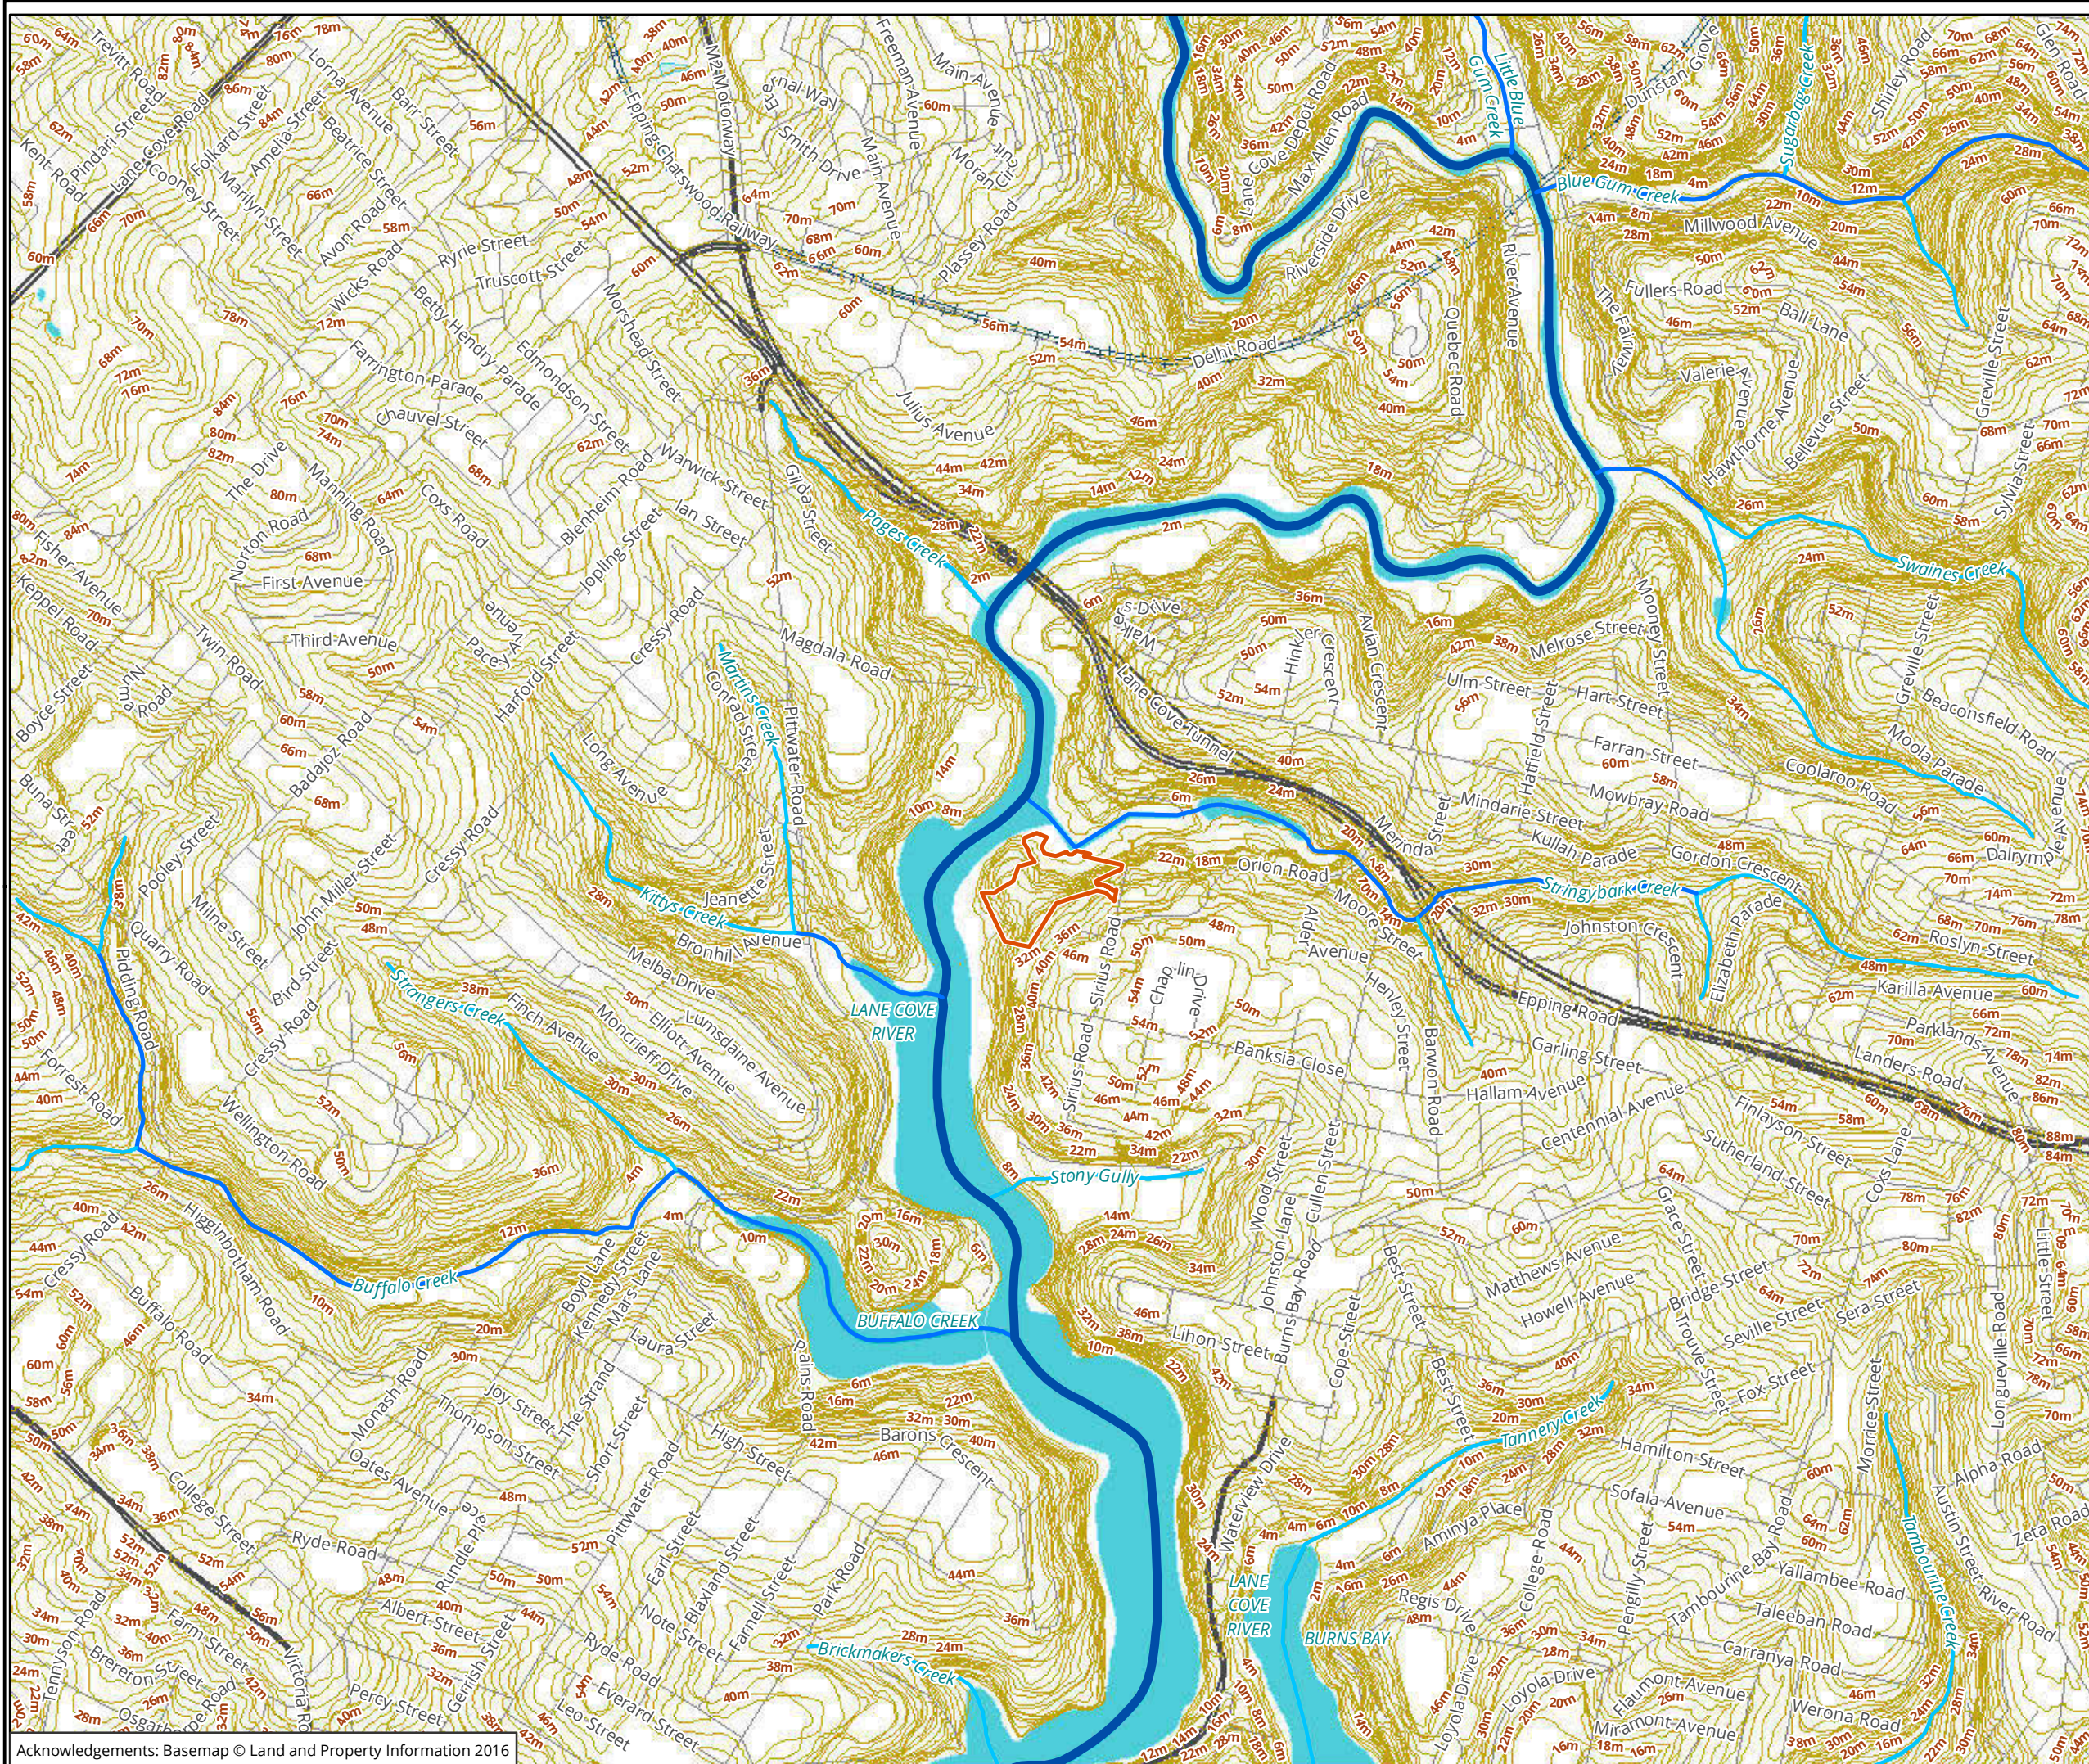

Legend

 Study area

Strahler Order

 1

 2

 5

Figure 5 Hydrology and topography in the vicinity of the study area


0 150 300 450 600 750

Metres
Scale: 1:15,000 @ A3
Coordinate System: GDA 1994 NSW Lambert



Biosis Pty Ltd
Albury, Ballarat, Melbourne,
Newcastle, Sydney, Wangaratta & Wollongong

Matter: 29387
Date: 05 February 2019,
Checked by: AV, Drawn by: AEDM, Last edited by: amurray
Location: P:\29300s\29387\Mapping\29387_F5_Hydrology

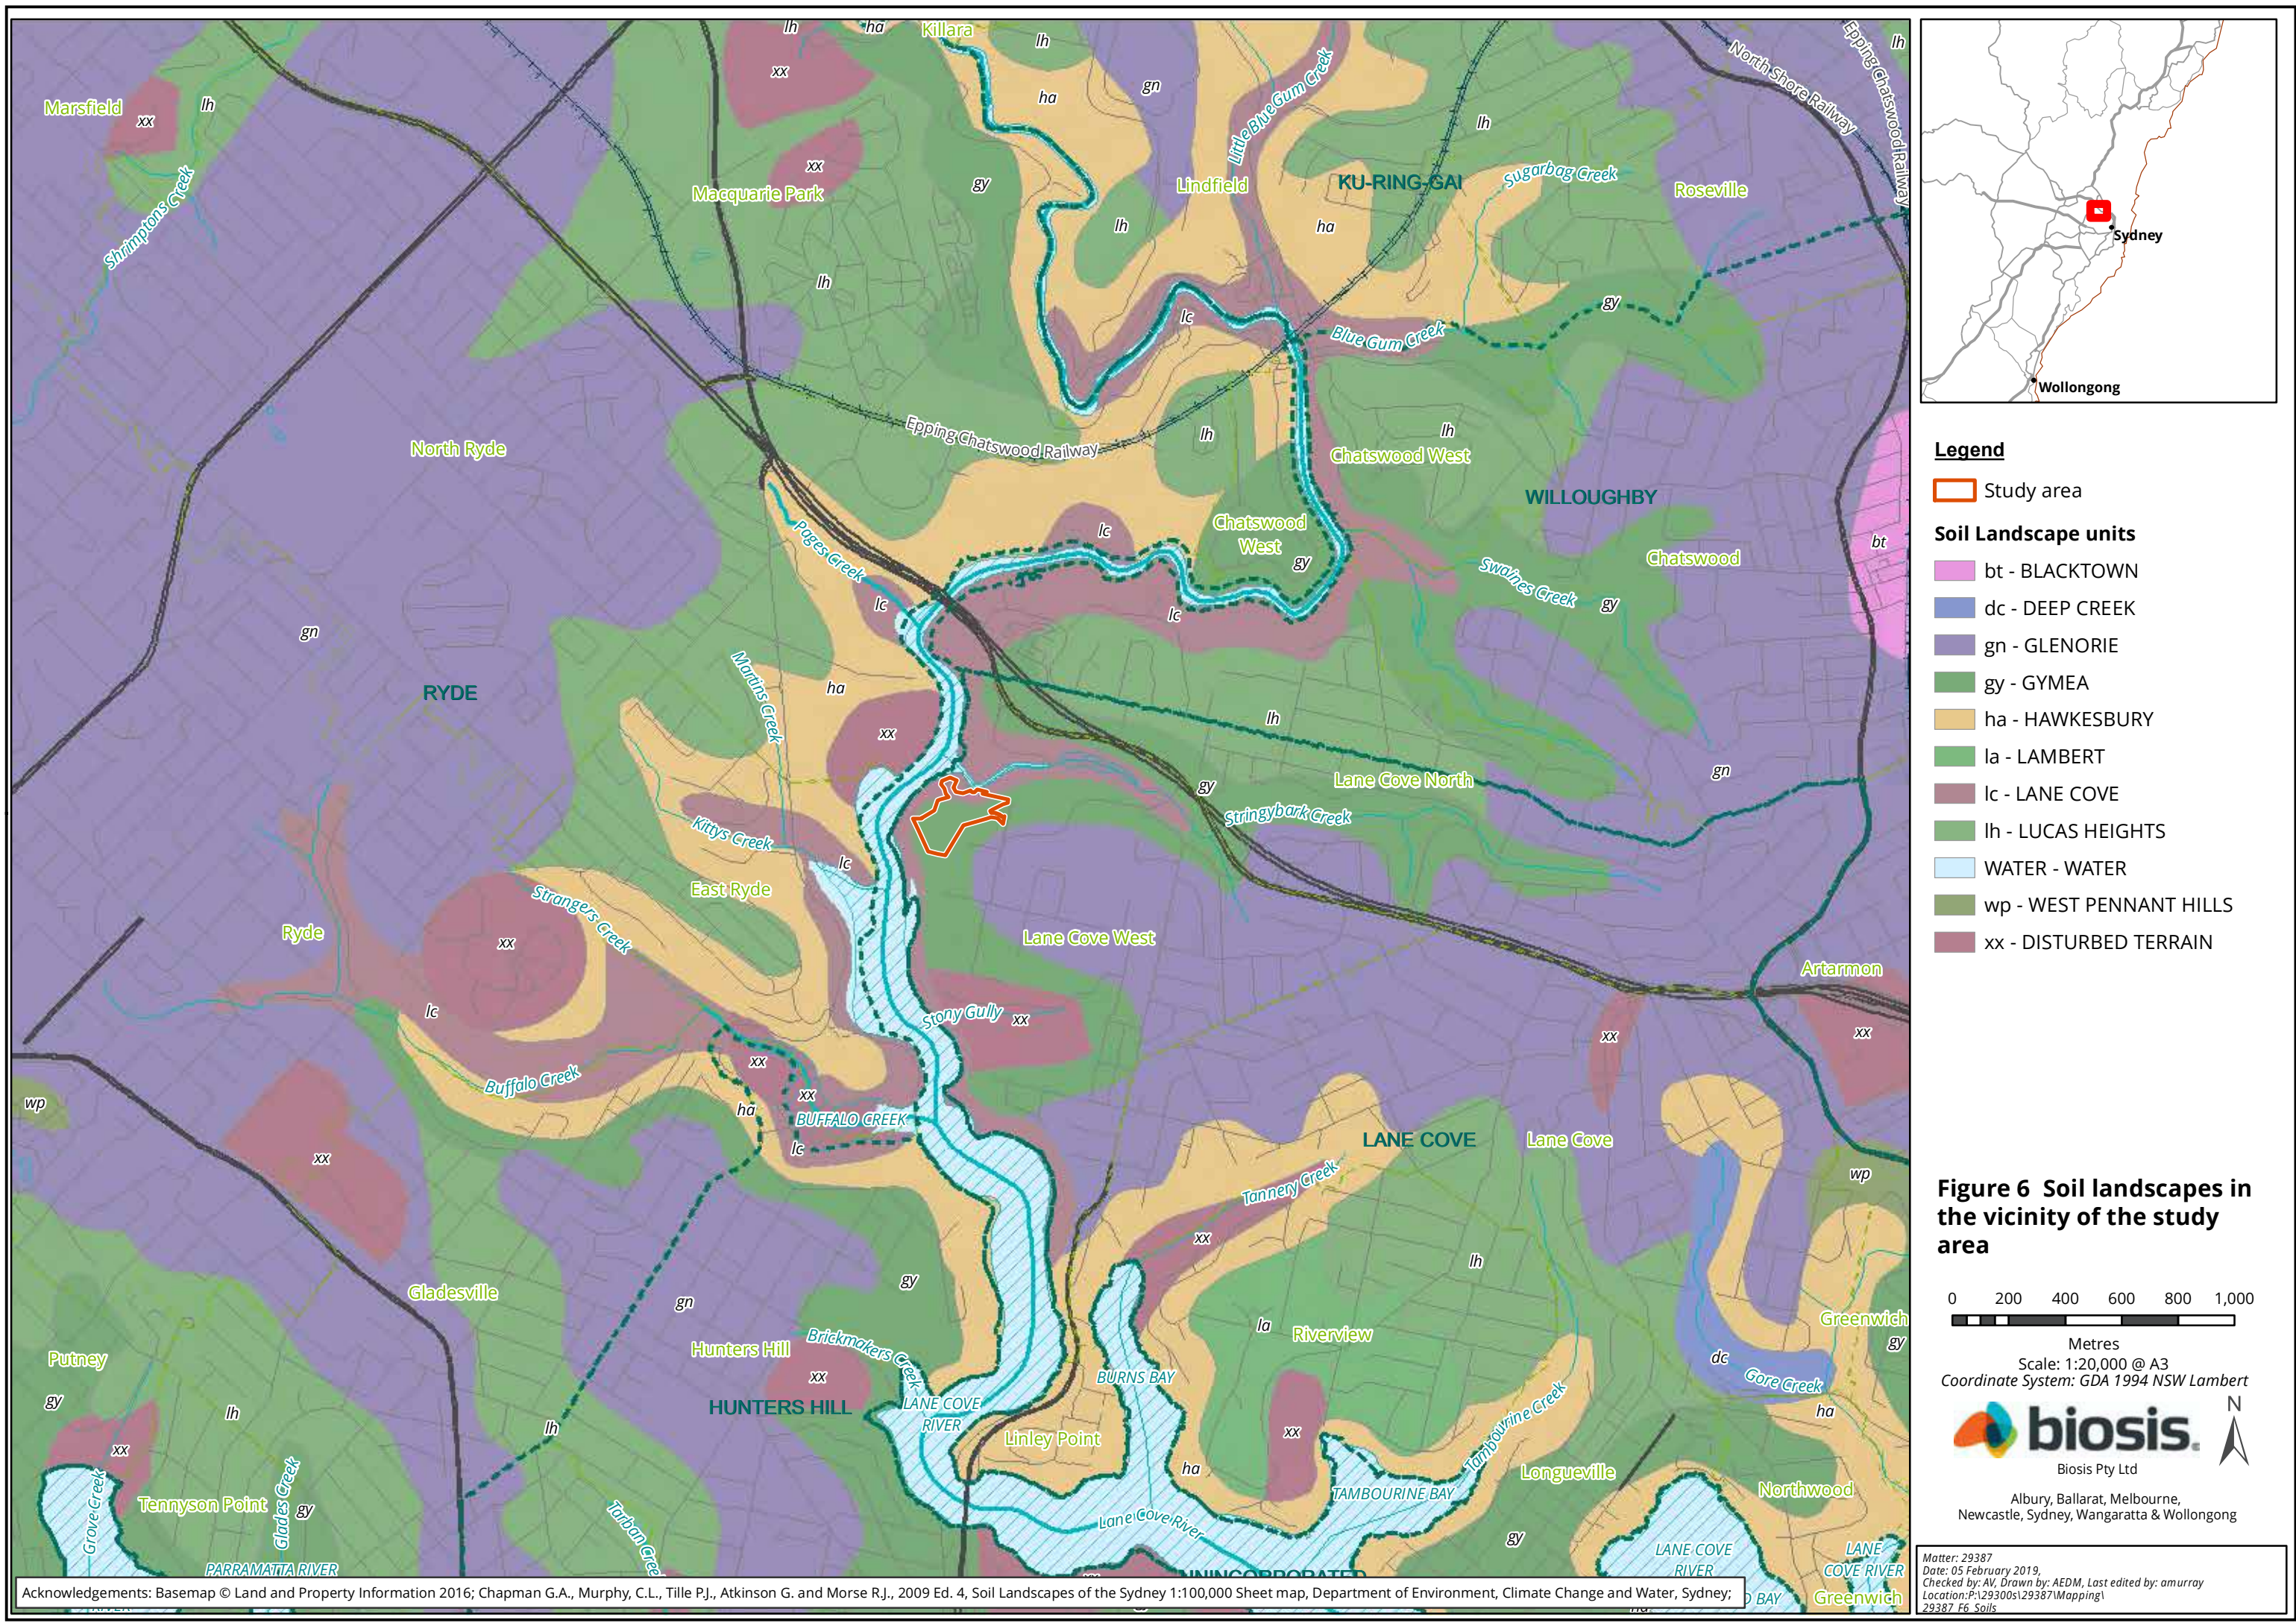

3.1.3 Landscape resources

The Sydney Basin would have generally provided a number of resources utilised by Aboriginal people. The wider region possesses distinct ecological zones, including open forest and open woodland, with riparian vegetation extending along many of the watercourses. Each ecological zone hosts a different array of floral and faunal species, many of which would have been utilised according to seasonal availability. Aboriginal inhabitants of the region would have had access to a wide range of avian, terrestrial and aquatic fauna and repeated firing of the vegetation would have opened up the foliage allowing ease of access through and between different resource zones.

Many of the plants found within the Sydney Basin were important to Aboriginal people and could be used for numerous purposes. These include using the wood to make implements, berries, leaves and tubers for food and medicines as well as bark for shelters. One of the plants exploited may have been the eucalypt, whose leaves can be crushed and used for medicinal purposes, while the sap can be used as a sweet sugary food source and the bark could be used to make bowls and shelters (Rhodes & Dunnett 1985).

Within the study area, the landscape would have supported a dry sclerophyll woodland with an open forest, however this original landscape has been extensively cleared by European colonization and development throughout the years. The plants most typically found throughout the area include red bloodwood *Eucalyptus gummifera*, yellow blood wood *E. eximia*, scribbly gum *E. haemastoma*, brown stringybark *E. capitellata* and old man banksia *Banksia serrata*. Native fauna would have included the noisy minor *Manorina (Myzantha) melanocephala*, kookaburra *Dacelo (Dacelo) novaeguineae*, Australian brushtail possum *Trichosurus vulpecula*, grey-headed flying-fox *Pteropus poliocephalus*, eastern blue-tongue *Tiliqua scincoides*, water dragon *Intellagama lesueurii*, red-bellied black snake *Pseudechis porphyriacus* and red rockcod *Scorpaena cardinalis*.

The various fauna species historically present within the study area would have provided a range of resources for Aboriginal people. Terrestrial and avian resources were not only used for food, but also provided a significant contribution to the social and ceremonial aspects of Aboriginal life through their use as ritual implements or even simply through fashioning as personal adornments (Attenbrow 2010, pp.107–110). Mammals such as kangaroos and wallabies and arboreal mammals such as possums were used as a food source, and for tool making. Bones and teeth were also used as points or barbs for hunting spears and fishing spears. Tail sinews are known to have been used as a fastening cord, whilst 'bone points' frequently occur in rock shelters (Attenbrow 2010, p.109). Animal skin, fur and sinews were also used for personal adornment and in making cloaks. Animals such as Brush-tailed Possums were highly prized for their fur, with possum skin cloaks recorded by the first settlers in the area. The cloaks were worn fastened over one shoulder and under the other. Kangaroo teeth were incorporated into decorative items such as head bands and beads were made from reeds and teeth. Aquatic species such as freshwater crayfish, fish and eels would have been easily accessible in larger waterways, such as the Lane Cove River (Rosen 1995).

3.1.4 Land use history

The first written use of the name Lane Cove occurred on 2 February 1788, soon after the arrival of the First Fleet in Port Jackson. Several possibilities for the name have been suggested, although none have been supported by written evidence. One suggestion was that it was named after Lieutenant Michael Lane, a respected cartographer, who worked with Captain James Cook in Canadian waters. The other possibility is that the name was bestowed in honour of John Lane, son of the Lord Mayor of London, and a good friend of Governor Arthur Phillip.

Many of the first land grants in the area were never settled by the owners, being exchanged for land elsewhere, sold or cancelled. For those who attempted to settle, life was not easy. Much of the area was steep, heavily timbered, with poor, rocky soil and few roads. The settlers were plagued with bushrangers and bushfires. From the earliest days of settlement, Lane Cove was an important source of timber for house and ship building, of grass for animal feed, and of shells which were burnt to produce lime for building. A stockade

was erected in Woodford Bay, with a permanent garrison of soldiers to protect convict workers and settlers. Throughout the 19th century, farms, orchards dairies were the district's main rural industries, with river transport providing easy access to the city markets.

The study area is split over three original land grants. While part of the surrounding area was granted to privates and non-commissioned officers of the New South Wales Corp in 1794, the study area land was not purchased until later. The three original grants belonged to Thomas Moore (40 acres purchased in April 1832), Henry O'Brien (10 acres purchased in April 1834) and William Hamey (11 acres purchased in April 1855). These allotments can be seen on crown plans and parish maps (Plate 1, Plate 2, Plate 3).

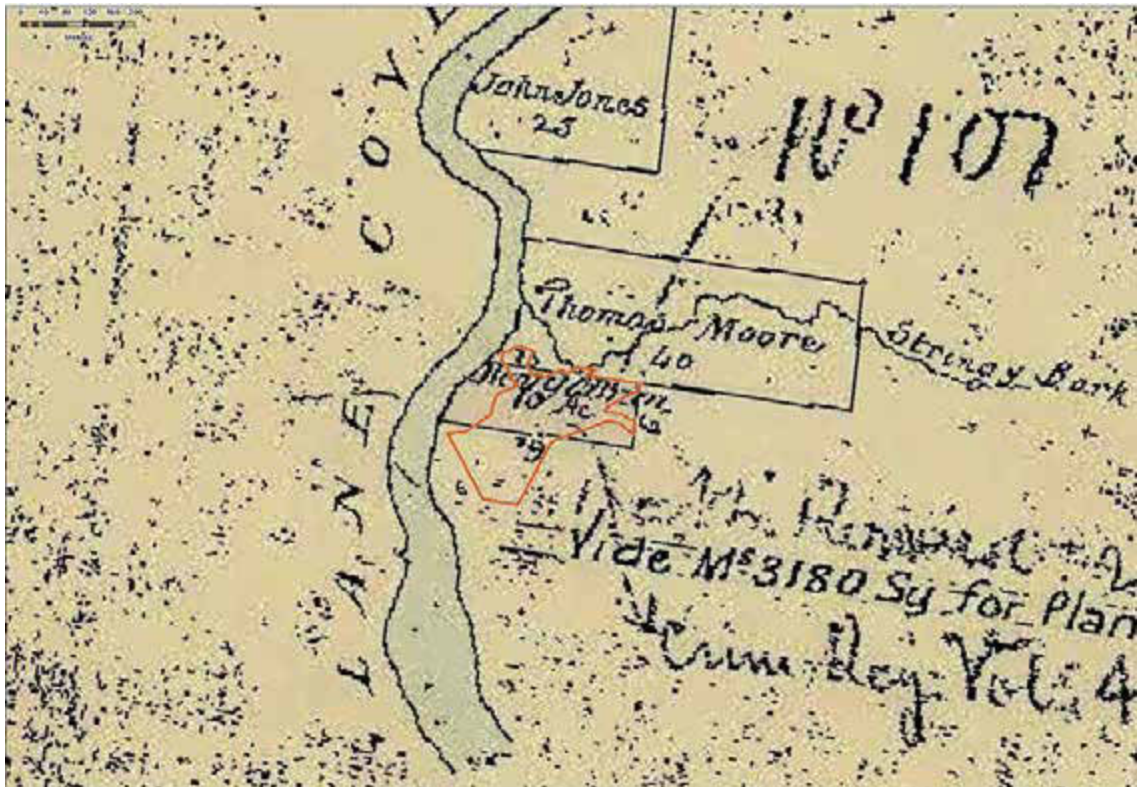


Plate 2 1833 Crown Plan showing Thomas Moore and Henry O'Briens grants (Source: NSW Land Registry Services, Crown Plan 138.690)



Plate 3 1854 Crown Plan showing the three original grants (Source: NSW Land Registry Services, Crown Plan 627.690)



Plate 4 Parish Map of Willoughby showing original grants (Source: NSW Land Registry Services, County of Cumberland Parish of Willoughby (sheet 1A))

The land use of the study area didn't change for many years; however, the immediate surrounds did. The Chicago Cornflour Factory opened in 1894, followed by the Cumberland Paper Mill in 1912, both located to the north of the study area. The area surrounding Mars Road to the south of the study area was also developed by being heavily subdivided in the 20th century. The study area can be seen in a subdivision plan from 1920, still in the configuration of the original land grant. No structures appear and it had not been subdivided at this point (Plate 5). The Cumberland Mill can also be seen in this subdivision plan, outside of the study area. It appears that the grants that made up the study area were not used extensively for farming or development, as historical aerals illustrate much of the area was still heavily vegetated.

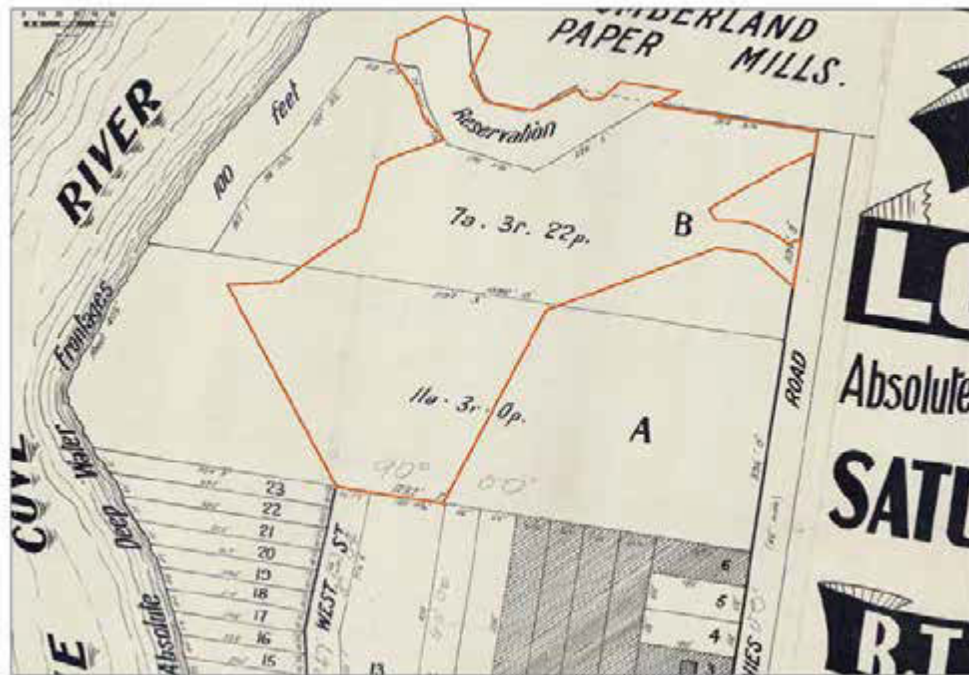


Plate 5 Subdivision plan from 1920 showing no development on the study area (Source: Lane Cove Library Local History LHM994.4139/1920/VIC)

A 1943 historical aerial (Plate 6) illustrates that majority of the study area had not yet been cleared or developed. In the northern portion of the study area, a large water tank, 85 metres in circumference, is present, with the land extending 80 metres to the south-east providing a small clearing with a track running throughout. As the tank is in the northern portion of the study area with no buildings directly adjacent to it, it is possible it could relate to the Cumberland Paper Mills. In the western portion of the study area, there is evidence of a building 14 metres in length. It is not known what the building was used for, however it is not present in current aerals, indicating that it has since been demolished. It is evident that the intensive clearing and industrial development of recent times had not yet occurred in 1943.



Plate 6 1943 aerial showing dense vegetation in the majority of the study area and two structures (Source: Land and Property Information)

Current aerals (Plate 10) illustrate that the study area has undergone massive vegetative clearing and industrial development, with the majority of the study area being highly disturbed. The structures present in the 1943 aerals are no longer present, with sparse vegetation surrounding the edges of the study area. Within the study area, there are large piles of rubble and fill objects, heavily concentrated towards the western side of the study area. Graded dirt roads appear throughout the study area, particularly towards the western side. In the southern portion there is an incised channel bank 20 metres east of the southern boundary. The eastern portion of the area backs onto to a highly developed light industrial area.



Plate 7 Current aerial showing cleared land with no structures (Source: Land and Property Information)

3.2 Previous archaeological work

A large number of cultural heritage investigations have been conducted throughout the Sydney Basin region in the past 30 years. There has been an increasing focus on cultural heritage assessments in NSW due to ever increasing development, along with the legislative requirements for this work and greater cultural awareness of Aboriginal cultural heritage.

3.2.1 Regional overview

Aboriginal occupation in the Sydney Basin region dates back well into the Pleistocene period (i.e. before 10,000 years ago). This evidence comes from radiocarbon dates retrieved from excavated sites such as Shaw's Creek K2 (14,700 years before present [BP]) (Attenbrow 2002, p.18) and George & Charles Street Parramatta (circa (c.) 25,000-30,000 BP) (Jo McDonald Cultural Heritage Management Pty Ltd 2005b).

Attenbrow (1990) undertook an investigation titled "The Port Jackson Archaeological Project" for the Australian Museum. The purpose of this report was to improve upon the existing literature about Aboriginal life as previous work had focused on historical accounts and not utilised the archaeological record. The report was broken into two stages; stage 1 involved site recording and survey, and stage 2 utilised excavation of selected sites. The project found that many middens and deposits were still able to be located within the Port Jackson landscape despite the development and expansion of Sydney and its surrounding suburbs. The survey relocated and recorded 112 sites with middens and deposits. The report concludes that there are more unregistered sites that had not been reported.

Convey (1990) conducted a comprehensive survey of the Lane Cove River State Recreation Area (SRA), now known as Lane Cove National Park. Approximately one third of the SRA was surveyed during a twelve day survey. Seven previously unrecorded Aboriginal sites were located, which included two engraving sites, two middens, and three rock shelters with deposit. Five potential habitation sites were also recorded along with three engraving sites which had previously been recorded.

Oakely (2000) completed a survey for a proposed sewerage upgrade within Lane Cove National Park. Two new Aboriginal sites were located in the southern portion of the National Park. Both new sites (LCRM1 and LCRM2) are shell midden scatters and associated areas of potential archaeological deposit (PAD). It was recommended that the sewer line should be redirected to avoid these sites, or if this was not possible that further archaeological work, such as a test excavation, should be conducted.

Irish (2004) undertook an assessment of Aboriginal scarred trees at Sydney Olympic Park as part of the Aboriginal History and Connections Program (AHCP), established by the Parklands Unit at Sydney Olympic Park. The purpose of the AHCP was to explore Aboriginal connections to the Homebush Bay area of Sydney from the earliest occupation until the present day. The ACHP found that the Sydney Olympic Park landscape had been heavily disturbed by historical land use practices such as land reclamation and industrial activities. The ACHP found that the only area within Sydney Olympic Park that had any potential to contain evidence of Aboriginal occupation and cultural activity was the relict Cumberland Woodland known as the Wanngal (Newington) Woodland, within the Newington Nature Reserve (Irish, P. 2004, p.59) A survey of the Woodland was conducted as part of this assessment in order to relocate a number of scarred trees recorded in the area. This assessment determined that none of the previously recorded scarred trees were Aboriginal in origin, as the characteristics associated with cultural scarring were not present and the trees were much too young to have been scarred by Aboriginal people. A number of previously unrecorded artefact scatters were however identified during the survey.

White and McDonald (2010) undertook a review of previous work in the Rouse Hill development area, discussing lithic artefact distribution in previous excavations carried out by JMCHM. The study considered a number of factors including stream order, distance from water, landform, aspect, and distance to silcrete sources. As a result of the assessment, the following statements were made:

- Stream Order: water supply was a significant factor influencing Aboriginal land use and habitation in the area. There was a correlation between increasing stream order and larger numbers and higher densities of artefacts (from a comparison of first, second, and fourth order streams).
- Distance from water: the results showed that an assumption that sites would be clustered within 50 metres of water sources was not entirely correct from the data available. In first order stream landscapes, there was no significant correlation between artefact distribution and distance to water. In second order landscapes, artefact density was highest within 50 metres of water, and then declined with increasing distance. In fourth order landscapes, density was highest between 51 to 100 metres from water.
- Landform: Artefact density was considered to be lowest on upper slopes and ridgetops, with density increasing on mid and lower slopes. Density was highest in terrace landforms, and lower on creek flats, likely due to repeated flooding events and the erosion the caused.
- Distance to silcrete sources: the results of the study showed no significant difference between sites located closer to or further away from silcrete sources. However, 6 kilometres was the maximum tested distance from silcrete sources, so the sample is only representative of a limited area.
- Aspect: only appeared to have an influence on sites in the lower parts of valleys may have been sited to take advantage of steady factors such as the rising/setting sun and wind direction. Sites in higher parts of valleys may have been influenced by weather and other factors.

The study concluded that landform and distance from water had an impact on site distribution, with the preference being for slightly elevated, well-drained areas in the lower parts of valleys.

Aboriginal Heritage Office (2011) completed a broad planning study for Aboriginal heritage in the City of Ryde Local Government Area (LGA). The purpose of the study was to identify, access, and re-record all Aboriginal sites located in the City of Ryde, to provide a planning document for conserving cultural values, and to provide a schedule for conservation works. It was concluded that 56 sites were recorded in the City of Ryde, most of which were rock shelters and middens. The LGA was divided into three Sections: Area 1 – Lane Cove River, Area 2 – Central Plateau, and Area 3 – Parramatta River. Area 1 was dominated by rock shelters, engravings, and grinding grooves. Area 2 contained a single artefact scatter. The report recommended a program for staff education take place to enable workers to identify and avoid Aboriginal sites, and regular monitoring of sites in the LGA was to be undertaken to ensure that Aboriginal sites were appropriately managed.

Biosis (2018) was commissioned by Ecove Group to conduct an Aboriginal archaeological assessment to support an Environmental Impact Statement (EIS) for a proposed development in Sydney Olympic Park. An archaeological survey of the area identified no Aboriginal sites, objects or areas of sensitivity. Due to the highly disturbed nature of the landscape, it was determined that low archaeological potential would be present throughout the entire site.

3.2.2 Local overview

A very small number of Aboriginal cultural heritage investigations have been conducted within ten kilometres of the study area. The few investigations undertaken were a part of development applications and included surface and sub-surface investigations. These investigations are summarised below.

HLA-Envirosciences (2003) undertook archaeological subsurface testing at Eden Gardens, Macquarie Park. The testing program consisted of nine test pits excavated along two transects, with the purpose of the excavations to establish the nature of soil profiles across the study area. The project also cleared some of the sandstone outcropping in a controlled manner to identify potential engravings. Test excavations encountered disturbance across all test pits. In one pit, a quartz artefact was identified along with one potential artefact. There was European material present at a greater depth in this pit however, suggesting that the artefact was

in a disturbed context. No other artefacts were identified, and no engravings were identified on the sandstone outcrop. It was recommended that a Consent to Destroy for the area be sought, with no requirement for further investigation.

Artefact Heritage (2011) conducted a survey of an area along the northern edge of Stringybark Creek in Lane Cove West. A previously recorded rock shelter with a charcoal drawing of two fish was relocated. Although the shelter had been disturbed by construction of a sewer pipe, the art remained in good condition. No new Aboriginal sites were located during the study.

Artefact Heritage (2017) was commissioned by Ausgrid to conduct a due diligence assessment for a cable replacement between Pittwater Road and Rene Street, East Ryde. A pedestrian survey of the study area was undertaken and no previously unrecorded Aboriginal sites or areas of archaeological sensitivity were identified within the study area. This was most likely due to the lack of archaeologically sensitive landforms, disturbance from road construction impacts and removal of vegetation.

3.2.3 AHIMS site analysis

A search of the AHIMS database (Client Service ID: 396636) identified 115 Aboriginal archaeological sites within a 2 by 2 kilometre search area, centred on the proposed study area (Table 4). None of these registered sites are located within the study area. AHIMS search results are provided in Appendix 1. Table 4 provides the frequencies of Aboriginal site types in the vicinity of the study area. The mapping coordinates recorded for these sites were checked for consistency with their descriptions and location on maps from Aboriginal heritage reports where available. These descriptions and maps were relied where notable discrepancies occurred.

It should be noted that the AHIMS database reflects Aboriginal sites that have been officially recorded and included on the list. Large areas of NSW have not been subject to systematic, archaeological survey; hence AHIMS listings may reflect previous survey patterns and should not be considered a complete list of Aboriginal sites within a given area. Some recorded sites consist of more than one element, for example artefacts and shell, however for the purposes of this breakdown and the predictive modelling, all individual site types will be studied and compared. This explains why there are 180 results presented here, compared to the 115 sites identified in AHIMS.

Table 4 AHIMS site type frequency

Site type	Number of occurrences	Frequency (%)
Artefact	72	40.00
Shell	60	33.33
Potential Archaeological Deposit (PAD)	20	11.11
Art (Pigment or Engraved)	18	10.00
Grinding Groove	8	4.45
Habitation Structure	2	1.11
Total	180	100%

A simple analysis of the Aboriginal cultural heritage sites registered within 2 kilometres of the study area indicates that the dominant site type is artefacts representing 40% (n=72,) and shell with 33.33% respectively (n=60), followed by PAD at 11.1% (n=20). Grinding grooves represent 4.45% (n=8), and habitation structures represent 1.11% (n=2) of total site types. All the sites were located within close proximity to the reliable

sources of water, were either exposed by the land clearing works (artefact scatters) or within areas of relevant sandstone outcrops for grinding grooves and overhang development (shelters with art/deposit).

DRAFT

3.3 Discussion

Summarise and discuss the local and regional character of Aboriginal land use and its material traces.

3.3.1 Predictive statement

A series of statements have been formulated to broadly predict the type and character of Aboriginal cultural heritage sites likely to exist throughout the study area and where they are more likely to be located.

These statements are based on:

- site distribution in relation to landscape descriptions within the study area
- consideration of site type, raw material types and site densities likely to be present within the study area
- findings of the ethnohistorical research on the potential for material traces to present within the study area
- potential Aboriginal use of natural resources present or once present within the study area
- consideration of the temporal and spatial relationships of sites within the study area and surrounding region.

Table 6 below indicates the site types most likely to be encountered across the present study area (The definition of each site type is described firstly, followed by the predicted likelihood of this site type occurring within the study area.

Table 5 Aboriginal site prediction statements

Site type	Site description	Potential
Flaked stone artefact scatters and isolated artefacts	Artefact scatter sites can range from high-density concentrations of flaked stone and ground stone artefacts to sparse, low-density 'background' scatters and isolated finds.	High: Stone artefact sites have been previously recorded in the region on level, well-drained topographies in close proximity to reliable sources of fresh water. Due to the close proximity to the fresh water resources of the Lane Cove River, the potential for artefacts to be present within the study area is assessed as high.
Shell middens	Deposits of shells accumulated over either singular large resource gathering events or over longer periods of time.	High: Shell midden sites have been recorded within the vicinity of the study area. There is high potential for shell middens to be located in the study area due to the close proximity to the Lane Cove River and its resources.
Grinding grooves	Grooves created in stone platforms through ground stone tool manufacture.	High: Suitable horizontal sandstone rock outcrops could occur along drainage lines. Grinding grooves have been recorded in the vicinity of the study area; therefore, the potential for them to be present within the study area is high.
Rock shelters with art and / or deposit	Rock shelter sites include rock overhangs, shelters or caves, and generally occur on, or next to, moderate to steeply sloping ground	Moderate: These sites will only occur where suitable sandstone exposures or overhangs possessing sufficient sheltered space exist, which

Site type	Site description	Potential
	characterised by cliff lines and escarpments. These naturally formed features may contain rock art, stone artefacts or midden deposits and may also be associated with grinding grooves.	are present along the Lane Cove River adjacent to the study area.
Potential Archaeological Deposits (PADs)	Potential sub surface deposits of cultural material.	Moderate: PADs have been previously recorded in the region across a wide range of landforms. PADs are likely to be present within areas adjacent to water courses or on high points in undisturbed landforms.
Aboriginal Ceremony and Dreaming sites	Such sites are often intangible places and features and are identified through oral histories, ethnohistoric data, or Aboriginal informants.	Moderate: There are currently no recorded mythological stories for the study area; however, there are often songlines and stories connected to areas where rock paintings and engravings occur.
Quarries	Raw stone material procurement sites.	Low: There is no record of any quarries being within or surrounding the study area.
Scarred trees	Trees with cultural modifications	Low: Scarred trees have not been recorded within the vicinity of the study area. Due to extensive vegetation clearance only a small number of mature native trees have survived within southernmost part of the study area.
Burials	Aboriginal burial sites.	Low: Aboriginal burial sites are generally situated within deep, soft sediments, caves or hollow trees. Areas of deep sandy deposits will have the potential for Aboriginal burials. The soil profiles associated with the study area are not commonly associated with burials.
Post-contact sites	These are sites relating to the shared history of Aboriginal and non-Aboriginal people of an area and may include places such as missions, massacre sites, post-contact camp sites and buildings associated with post-contact Aboriginal use.	Low: There are no post-contact sites previously recorded in the study area and historical sources do not identify one.

Site type	Site description	Potential
Aboriginal places	Aboriginal places may not contain any 'archaeological' indicators of a site, but are nonetheless important to Aboriginal people. They may be places of cultural, spiritual or historic significance. Often they are places tied to community history and may include natural features (such as swimming and fishing holes), places where Aboriginal political events commenced or particular buildings.	Low: There are currently no recorded Aboriginal historical associations for the study area.

DRAFT

4 Field investigation

A field investigation of the study area consisting of an archaeological survey was undertaken on 20 November 2018 by James Cole. The field survey sampling strategy, methodology and a discussion of results are provided below.

4.1 Archaeological survey objectives

The objectives of the survey were to:

- Provide RAPs an opportunity to view the study area and to discuss previously identified Aboriginal object(s) and/or place(s) in or within close proximity to the study area.
- Undertake a systematic survey of the study area targeting areas with the potential for Aboriginal heritage.
- Identify and record Aboriginal archaeological sites visible on the ground surface.
- Identify and record areas of PADs.

4.2 Archaeological survey methodology

The survey methods were intended to assess and understand the landforms and to determine whether any archaeological material from Aboriginal occupation or land use exists within the study area.

4.2.1 Survey methods

The archaeological survey was conducted on foot with a field team of two members in a meandering transect. Recording during the survey followed the archaeological survey requirements of the Code and industry best practice methodology. Information recorded during the survey included:

- Aboriginal objects or sites present in the study area during the survey.
- Survey coverage.
- Any resources that may have potentially have been exploited by Aboriginal people.
- Landform.
- Photographs of the site indicating landform.
- Evidence of disturbance.
- Aboriginal artefacts, culturally modified trees or any other Aboriginal sites.

Where possible, identification of natural soil deposits within the study area was undertaken. Photographs and recording techniques were incorporated into the survey including representative photographs of survey units, landform, vegetation coverage, ground surface visibility (GSV) and the recording of soil information for each survey unit were possible. Any potential Aboriginal objects observed during the survey were documented and photographed. The location of Aboriginal cultural heritage and points marking the boundary of the landform elements were recorded using a hand-held Global Positioning System (GPS) and the Map Grid of Australia (MGA) (94) coordinate system.

4.3 Archaeological survey results

4.3.1 Constraints to the survey

With any archaeological survey there are several factors that influence the effectiveness (the likelihood of finding sites) of the survey. The factors that contributed most to the effectiveness of the survey within the study area were the dense grass cover (Plate 8) and fill covering large portions of the site (Plate 9).



Plate 8 View across site to the north-west, showing grass cover



Plate 9 Contaminated fill dumped on site, view south-east

4.3.2 Visibility

In most archaeological reports and guidelines visibility refers to GSV, and is usually a percentage estimate of the ground surface that is visible and allowing for the detection of (usually stone) artefacts that may be present on the ground surface (DECCW 2010b).

Visibility was variable across the study area, with the majority of the study area being covered with grass which would not allow for the detection of surface sites such as stone artefacts, and stone outcrops were often covered with plant litter or introduced material. Visibility was highest in areas of disturbance. A number of sandstone overhangs were identified on site, which were able to be inspected to determine if there were any Aboriginal sites associated with them.



Plate 10 Area of higher visibility associated with disturbance, view south



Plate 11 Sandstone overhang in the central portion of the study area, view south-east

4.4 Exposure

Exposure refers to the geomorphic conditions of the local landform being surveyed, and attempts to describe the relationship between those conditions and the likelihood the prevailing conditions provide for the exposure of (buried) archaeological materials. Whilst also usually expressed as a percentage estimate, exposure is different to visibility in that it is in part a summation of geomorphic processes, rather than a simple observation of the ground surface (Burke & Smith 2004, p.79, DECCW 2010b). Overall, the study area displayed moderate areas of exposure around disturbance associated with dumping and excavation, and erosion associated with tracks throughout it.



Plate 12 Area of exposure associated with drainage channel in the southern portion of the study area, view west



Plate 13 Area of exposure associated with a track in the central portion of the study area, view north-east

4.4.1 Disturbances

Disturbance in the study area is associated with natural and human agents. Natural agents generally affect small areas and include the burrowing and scratching in soil by animals, such as wombats, foxes, rabbits and wallabies, and sometimes exposure from slumping or scouring. Disturbances associated with human action can include residential development such as landscaping and construction of residential buildings; farming practices, such as initial vegetation clearance for creation of paddocks, fencing and stock grazing; agricultural practices such as fruit orchards; light industrial practices such as nursery and creation of artificial dams.

The study area has been subject to extensive disturbance, with both cut and fill actions identified during the survey, large amounts of illegal dumping of material, and the construction of both tracks and drainage features throughout the study area. Sandstone outcrops were identified which may have been suitable for rock engravings, however the marks identified on them were consistent with having been scraped by an excavator, likely to clear earth or loose material. There are a number of areas paved with gravel, and historical aerals indicate at least two previous structures within the study area.



Plate 14 Sandstone surface with gouge marks in the central portion of the study area, view north-west



Plate 15 Paved area in the southern portion of the study area, view south


DRAFT

Table 6 Survey coverage

Survey unit	Landform	Survey unit area (m ²)	Visibility (%)	Exposure (%)	Effective coverage area (m ²)	Effective coverage (%)
1	Ridge	5677.57	40	30	681.31	12.0
2	Slope	12050.63	20	2	48.20	0.4
3	Ridge	2070.85	0	0	0.00	0.0
4	Flat	9913.73	10	5	49.57	0.5
5	Slope	9822.13	13	10	127.69	1.3

Table 7 Landform summary

Landform	Landform area (m ²)	Area effectively surveyed (m ²)	Landform effectively surveyed (%)	No. of Aboriginal sites	No. of artefacts or features
Ridge	7748.41	681.31	8.8	0	0
Flat	9913.73	49.57	0.5	0	0
Slope	21872.76	175.89	0.8	0	0

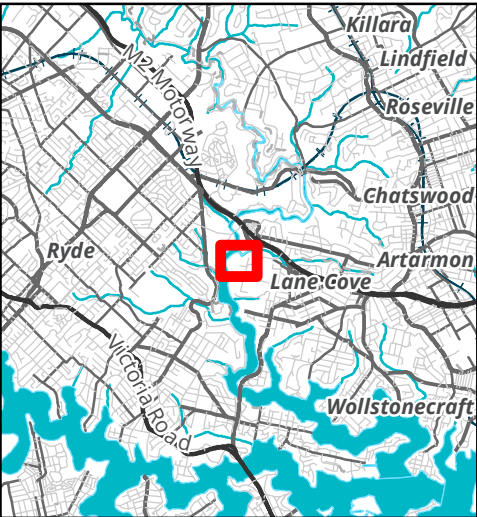

Legend

Study area

Transect

Archaeological potential

Low

Figure 7: Survey coverage and results

0 20 40 60 80 100
Metres

Scale: 1:2,000 @ A3
Coordinate System: GDA 1994 NSW Lambert

biosis.
Biosis Pty Ltd

Albury, Ballarat, Melbourne,
Newcastle, Sydney, Wangaratta & Wollongong

Matter: 29030
Date: 30 November 2018,
Checked by: JAC, Drawn by: AEDM, Last edited by: amurray
Location: P:\29000s\29030\Mapping\29030_F7_SurveyCoverage

4.5 Discussion of archaeological survey results

The study area was divided between three landform units: ridges, slopes, and flats, all of which exhibited signs of landscape modification. Ridges were present in the eastern and south-eastern portions of the study area, around the existing access track and a paved area which is likely to have been a car park. The northern portion of the study area, closest to Stringybark Creek, consists of a flat, while the remainder of the study area consists of gentle to moderate slopes (Table 5 and Table 6).

The archaeological survey consisted of four transects walked across the study area in order to identify Aboriginal sites present within it. The background research for the project noted the potential for a number of site types to be present within it including:

- Artefact sites which have the potential to be present across the landscape in both disturbed and undisturbed contexts.
- shell middens which were noted to have the potential to be present, owing to the proximity of the study area to the Lane Cove River.
- rock shelters, which may exist where suitable sandstone overhangs are present.
- grinding grooves, which may exist where suitable sandstone surfaces are present.
- PADs which have the potential to be present in undisturbed landforms.
- Aboriginal Ceremony and Dreaming sites, which are commonly present in association with rock shelters and engravings.

A number of sandstone surfaces and overhangs were identified during the survey, which were inspected for Aboriginal sites including grinding grooves, engravings, art, and PAD, with no features identified during the survey. It was noted that a number of sandstone platforms did have gouge marks on them consistent with the toothed edge of a machine excavator bucket, which may have damaged or removed any grinding grooves or engravings which may have been present.

Owing to the levels of disturbance, there were no locations identified within the study area which were considered to have the potential to retain intact archaeological deposits of artefacts or shell. The majority of the study area has been subject to cut and fill actions, with much of the original ground surface having been visibly altered. It is considered that in lesser disturbed areas to the west of the study area, there is likely to be higher archaeological potential. Within the study area, disturbance included the removal of topsoil, construction of buildings within the study area, and the dumping and removal of contaminated fill. Based on discussions with the client, it is understood that in the northern portion of the study area, there is a large amount of artificial fill capped with clay adjacent to Stringybark Creek.

Based on this archaeological survey, the study area has been assessed as holding low archaeological potential to contain intact Aboriginal sites.

5 Scientific values and significance assessment

The two main values addressed when assessing the significance of Aboriginal sites are cultural values to the Aboriginal community and archaeological (scientific) values. This report will assess scientific values while the ACHA report will detail the cultural values of Aboriginal sites in the study area.

5.1 Introduction to the assessment process

Heritage assessment criteria in NSW fall broadly within the significance values outlined in the Australia International Council on Monuments and Sites (ICOMOS) Burra Charter (Australia ICOMOS 2013). This approach to heritage has been adopted by cultural heritage managers and government agencies as the set of guidelines for best practice heritage management in Australia. These values are provided as background and include:

- **Historical significance** (evolution and association) refers to historic values and encompasses the history of aesthetics, science and society, and therefore to a large extent underlies all of the terms set out in this section. A place may have historic value because it has influenced, or has been influenced by, an historic figure, event, phase or activity. It may also have historic value as the site of an important event. For any given place the significance will be greater where evidence of the association or event survives in situ, or where the settings are substantially intact, than where it has been changed or evidence does not survive. However, some events or associations may be so important that the place retains significance regardless of subsequent treatment.
- **Aesthetic significance** (Scenic/architectural qualities, creative accomplishment) refers to the sensory, scenic, architectural and creative aspects of the place. It is often closely linked with social values and may include consideration of form, scale, colour, texture, and material of the fabric or landscape, and the smell and sounds associated with the place and its use.
- **Social significance** (contemporary community esteem) refers to the spiritual, traditional, historical or contemporary associations and attachment that the place or area has for the present-day community. Places of social significance have associations with contemporary community identity. These places can have associations with tragic or warmly remembered experiences, periods or events. Communities can experience a sense of loss should a place of social significance be damaged or destroyed. These aspects of heritage significance can only be determined through consultative processes with local communities.
- **Scientific significance** (Archaeological, industrial, educational, research potential and scientific significance values) refers to the importance of a landscape, area, place or object because of its archaeological and/or other technical aspects. Assessment of scientific value is often based on the likely research potential of the area, place or object and will consider the importance of the data involved, its rarity, quality or representativeness, and the degree to which it may contribute further substantial information.

The cultural and archaeological significance of Aboriginal and historic sites and places is assessed on the basis of the significance values outlined above. As well as the ICOMOS Burra Charter significance values guidelines, various government agencies have developed formal criteria and guidelines that have application when assessing the significance of heritage places within NSW. Of primary interest are guidelines prepared by the Commonwealth Department of the Environment and Energy, OEH, NSW Department of Planning and Environment. The relevant sections of these guidelines are presented below.

These guidelines state that an area may contain evidence and associations which demonstrate one or any combination of the ICOMOS Burra Charter significance values outlined above in reference to Aboriginal heritage. Reference to each of the values should be made when evaluating archaeological and cultural significance for Aboriginal sites and places.

In addition to the previously outlined heritage values, the OEH Guidelines (OEH 2011) also specify the importance of considering cultural landscapes when determining and assessing Aboriginal heritage values. The principle behind a cultural landscape is that 'the significance of individual features is derived from their inter-relatedness within the cultural landscape'. This means that sites or places cannot be 'assessed in isolation' but must be considered as parts of the wider cultural landscape. Hence the site or place will possibly have values derived from its association with other sites and places. By investigating the associations between sites, places, and (for example) natural resources in the cultural landscape the stories behind the features can be told. The context of the cultural landscape can unlock 'better understanding of the cultural meaning and importance' of sites and places.

Although other values may be considered – such as educational or tourism values – the two principal values that are likely to be addressed in a consideration of Aboriginal sites and places are the cultural/social significance to Aboriginal people and their archaeological or scientific significance to archaeologists. The determinations of archaeological and cultural significance for sites and places should then be expressed as statements of significance that preface a concise discussion of the contributing factors to Aboriginal cultural heritage significance.

5.2 Archaeological (scientific significance) values

Archaeological significance (also called scientific significance, as per the ICOMOS Burra Charter) refers to the value of archaeological objects or sites as they relate to research questions that are of importance to the archaeological community, including indigenous communities, heritage managers and academic archaeologists. Generally the value of this type of significance is determined on the basis of the potential for sites and objects to provide information regarding the past life-ways of people (Burke & Smith 2004, p.249, NPWS 1997). For this reason, the NPWS summarises the situation as 'while various criteria for archaeological significance assessment have been advanced over the years, most of them fall under the heading of archaeological research potential' (NPWS 1997, p.26). The NPWS criteria for archaeological significance assessment are based largely on the ICOMOS Burra Charter.

Research potential

Research potential is assessed by examining site content and site condition. Site content refers to all cultural materials and organic remains associated with human activity at a site. Site content also refers to the site structure – the size of the site, the patterning of cultural materials within the site, the presence of any stratified deposits and the rarity of particular artefact types. As the site contents criterion is not applicable to scarred trees, the assessment of scarred trees is outlined separately below. Site condition refers to the degree of disturbance to the contents of a site at the time it was recorded.

The site contents ratings used for the study area are shown in Table 8, and the site condition ratings in Table 9.

Table 8 Site content ratings

Rating	Description
0	No cultural material remaining.

Rating	Description
1	Site contains a small number (e.g. 0–10 artefacts) or limited range of cultural materials with no evident stratification.
2	Site contains a larger number, but limited range of cultural materials; and/or some intact stratified deposit remains; and/or are or unusual example(s) of a particular artefact type.
3	Site contains a large number and diverse range of cultural materials; and/or largely intact stratified deposit; and/or surface spatial patterning of cultural materials that still reflect the way in which the cultural materials were deposited.

Table 9 Site condition ratings

Rating	Description
0	Site destroyed.
1	Site in a deteriorated condition with a high degree of disturbance; lack of stratified deposits; some cultural materials remaining.
2	Site in a fair to good condition, but with some disturbance.
3	Site in an excellent condition with little or no disturbance. For surface artefact scatters this may mean that the spatial patterning of cultural materials still reflects the way in which the cultural materials were laid down.

Pearson and Sullivan (1995, p.149) note that Aboriginal archaeological sites are generally of high research potential because ‘they are the major source of information about Aboriginal prehistory’. Indeed, the often great time depth of Aboriginal archaeological sites gives them research value from a global perspective, as they are an important record of humanity’s history. Research potential can also refer to specific local circumstances in space and time – a site may have particular characteristics (well preserved samples for absolute dating, or a series of refitting artefacts, for example) that mean it can provide information about certain aspects of Aboriginal life in the past that other less or alternatively valuable sites may not (Burke & Smith 2004, pp.247–8). When determining research potential value particular emphasis has been placed on the potential for absolute dating of sites.

The following sections provide statements of significance for the Aboriginal archaeological sites recorded during the sub-surface testing for the assessment. The significance of each site follows the assessment process outlined above. This includes a statement of significance based on the categories defined in the Burra Charter. These categories include social, historic, scientific, aesthetic and cultural (in this case archaeological) landscape values. Nomination of the level of value—high, moderate, low or not applicable—for each relevant category is also proposed. Where suitable the determination of cultural (archaeological) landscape value is applied to both individual sites and places (to explore their associations) and also, to the Study Area as a whole. The nomination levels for the archaeological significance of each site are summarised below.

Representativeness

Representativeness refers to the regional distribution of a particular site type. Representativeness is assessed by whether the site is common, occasional, or rare in a given region. Assessments of representativeness are subjectively biased by current knowledge of the distribution and number of archaeological sites in a region. This varies from place to place depending on the extent of archaeological research. Consequently, a site that is assigned low significance values for contents and condition, but a high significance value for

representativeness, can only be regarded as significant in terms of knowledge of the regional archaeology. Any such site should be subject to re-assessment as more archaeological research is undertaken.

Assessment of representativeness also takes into account the contents and condition of a site. For example, in any region there may only be a limited number of sites of any type that have suffered minimal disturbance. Such sites would therefore be given a high significance rating for representativeness, although they may occur commonly within the region.

The representativeness ratings used for the study area are shown in Table 10.

Table 10 Site representativeness ratings

Rating	Description
1	Common occurrence
2	Occasional occurrence
3	Rare occurrence

Overall scientific significance ratings for the study area, based on a cumulative score for site contents, site integrity and representativeness are shown in Table 11

Table 11 Scientific significance ratings

Rating	Description
1-3	Low scientific significance
4-6	Moderate scientific significance
7-9	High scientific significance

The study area was given a score on the basis of these criteria – the overall scientific significance is determined by the cumulative score.

5.2.1 Statements of archaeological significance

The following archaeological significance assessment is based on Requirement 11 of the code. Using the assessment criteria detailed in Scientific Values and Significance Assessment, an assessment of significance was determined and a rating for the study area was determined. The results of the archaeological significance assessment are given in Table 12 below.

Table 12 Scientific significance assessment of archaeological sites recorded within the study area.

Site name	Site content	Site condition	Representativeness	Scientific Significance
Lot 1 DP 1151370	0	1	1	1 - Low

Table 13 Statements of scientific significance for the study area

Site Name	Statement of Significance
Lot 1 DP 1151370	The study area has been subject to cut and fill actions, with much of the original ground surface having been visibly altered. Within the study area, disturbed included the removal of topsoil, construction of buildings within the study area, and the dumping and removal of contaminated fill. Owing to the levels of disturbance, there were no locations identified within the study area which were considered to have the potential to retain intact archaeological deposits of artefacts or shell. The scientific significance of this site has been assessed as low.

DRAFT

6 Impact assessment

As previously outlined, the project proposes to construct a data storage building, electrical substation, ancillary office area, loading docks, associated infrastructure, car parking and landscaping.

6.1 Predicted physical impacts

The proposed works will consist of bulk earthworks and site infrastructure, followed by the construction of a road ways and landscaping. All of these activities will have the potential to impact Aboriginal sites. However, the study area has been subject to cut and fill actions, with much of the original ground surface having been visibly altered. Within the study area, disturbed included the removal of topsoil, construction of buildings within the study area, and the dumping and removal of contaminated fill.

As there are no Aboriginal sites within the study area and the area is highly disturbed the proposed works will not impact on Aboriginal heritage values

6.2 Management and mitigation measures

Ideally, heritage management involves conservation of sites through the preservation and conservation of fabric and context within a framework of 'doing as much as necessary, as little as possible' (Marquis-Kyle & Walker 1994, p.13). In cases where conservation is not practical, several options for management are available. For sites, management often involves the salvage of features or artefacts, retrieval of information through excavation or collection (especially where impact cannot be avoided) and interpretation.

Avoidance of impact to archaeological and cultural heritage sites through design of the development is the primary mitigation and management strategy, and should be implemented where practicable. However, due to the levels of disturbance and absence of Aboriginal sites, there are no specific management and mitigation measures required. After the completion of the construction of the proposed development, MLALC suggests that landscapes of native vegetation be planted and Gammerraygal names be used in any visual interpretation or signage within the gardens.

7 Recommendations

Strategies have been developed based on the archaeological (significance) of cultural heritage relevant to the study area and influenced by:

- Predicted impacts to Aboriginal cultural heritage
- The planning approvals framework
- Current best conservation practise, widely considered to include:
 - Ethos of the Australia ICOMOS Burra Charter
 - The Code

Prior to any impacts occurring within the study area, the following is recommended:

Recommendation 1: No further archaeological assessment is required

No further archaeological work is required in the study area due to the entire study area being assessed as having low archaeological potential.

Recommendation 2: Landscape design to include Indigenous plants

After the completion of the construction of the proposed development, it is suggested that landscapes of native vegetation be planted and Gammerraygal names be used in any visual interpretation or signage within the gardens. This will ensure the visual amenity of the area is retained and the acknowledgement of Aboriginal people as the original custodians of the area are recognised.

Recommendation 3: Discovery of Unanticipated Aboriginal Objects

All Aboriginal objects and Places are protected under the NPW Act. It is an offence to knowingly disturb an Aboriginal site without a consent permit issued by the OEH. Should any Aboriginal objects be encountered during works associated with this proposal, works must cease in the vicinity and the find should not be moved until assessed by a qualified archaeologist. If the find is determined to be an Aboriginal object the archaeologist will provide further recommendations. These may include notifying the OEH and Aboriginal stakeholders.

Recommendation 4: Discovery of Aboriginal Ancestral Remains

Aboriginal ancestral remains may be found in a variety of landscapes in NSW, including middens and sandy or soft sedimentary soils. If any suspected human remains are discovered during any activity you must:

4. Immediately cease all work at that location and not further move or disturb the remains.
5. Notify the NSW Police and OEH's Environmental Line on 131 555 as soon as practicable and provide details of the remains and their location.
6. Not recommence work at that location unless authorised in writing by OEH.

References

- Aboriginal Heritage Office 2011, *Aboriginal Site Management Report*, City of Ryde.
- Artefact Heritage 2011, *150 Epping Rd, Lane Cove West-Heritage Study Aboriginal Cultural Heritage Assessment and Assessment of non-Indigenous heritage for a Concept Plan application*.
- Artefact Heritage 2017, *Aboriginal heritage due diligence assessment for cable replacement between Pittwater Road and Rene Street, East Ryde*, Report to Ausgrid.
- Attenbrow, V 1990, *The Port Jackson archaeological project : report on stage I*, Australian Museum.
- Attenbrow, V 2002, *Sydney's Aboriginal Past: Investigating the archaeological and historical records*, University of New South Wales Press Ltd, Sydney.
- Attenbrow, V 2010, *Sydney's Aboriginal Past. Investigating the Archaeological and Historical Records*, University of New South Wales Press Ltd, Sydney NSW.
- Australia ICOMOS 2013, *The Burra Charter: the Australia ICOMOS Charter for Places of Cultural Significance*, Australia ICOMOS, Burwood, VIC.
- Biosis 2018, *1 Sirius Road, Lane Cove: Archaeological survey report*.
- Biosis Pty Ltd 2018, *Site 2 – Sydney Olympic Park: Archaeological Report*.
- Burke, H & Smith, C 2004, *The Archaeologist's Field Handbook*, Allen and Unwin, Crows Nest.
- Chapman, G & Murphy, C 1989, *Soil Landscapes of the Sydney 1:100,000 sheet*, Soil Conservation Service of NSW, Sydney.
- Conyers, B 1990, *Survey for Aboriginal Archaeological Sites: Lane Cove River State Recreation Area*.
- DECCW 2010a, *Aboriginal Cultural Heritage Consultation Requirements for Proponents*, Department of Environment and Climate Change, Sydney NSW.
- DECCW 2010b, *Code of Practice for Archaeological Investigation of Aboriginal Objects in New South Wales*, Department of Environment and Climate Change, Sydney NSW.
- HLA-Envirosciences 2003, *Archaeological Subsurface Testing Program: Eden Gardens, Macquarie Park, NSW.*, HLA-Envirosciences.
- Irish, P. 2004, 'When Is a Scar a Scar? Evaluating Scarred and Marked Trees at Sydney Olympic Park.', *Australian Archaeology*, vol. 59, pp. 59–61.
- Jo McDonald Cultural Heritage Management Pty Ltd 2000, *Archaeological Survey for Aboriginal Sites: Proposed Light Industrial Subdivision, 'Austral Site', Mamre Road, Erskine Park, NSW. Report to Gunninah Environmental Consultants for Austral Brick Company*.

Jo McDonald Cultural Heritage Management Pty Ltd 2005a, *Archaeological Salvage Excavation of Site CG1 (NPWS #45-5-2648), at the corner of Charles and George Streets, Parramatta, NSW*, Report to Meriton Apartments Pty Ltd.

Jo McDonald Cultural Heritage Management Pty Ltd 2005b, *Archaeological Salvage Excavation of Site RTA-G1 109-113 George Street Parramatta, NSW*, Report to Landcom.

Jo McDonald Cultural Heritage Management Pty Ltd 2006, *Archaeological Salvage Excavation of the Colebee release Area, Schofields, NSW. Draft report prepared for Medallist Developments.*

Jo McDonald Cultural Heritage Management Pty Ltd 2008, *Austral Land Mamre Road , Erskine Park Archaeological Salvage Excavations, Report to Macquarie Goodman.*

Marquis-Kyle, P & Walker, M 1994, *The illustrated Burra Charter : making good decisions about the care of important places*, Australia ICOMOS with the assistance of the Australian Heritage Commission, Sydney.

NPWS 1997, 'Aboriginal Cultural Heritage: Standards and Guidelines Kit'.

Oakely, B 2000, *Indigenous Heritage Assessment – Proposed Sewerage Upgrade REF, Lane Cove National Park.*

OEH 2011, *Guide to Investigating, Assessing and Reporting on Aboriginal Cultural Heritage in NSW*, Office of Environment and Heritage.

Pearson, M & Sullivan, S 1995, *Looking after heritage places : the basics of heritage planning for managers, landowners and administrators*, Melbourne University Press, Carlton, Vic.

Rhodes, J & Dunnett, G 1985, *Aboriginal Resources Planning Study: City of Penrith*, National Parks & Wildlife Service, Sydney. NSW.

Rosen, S 1995, *Heritage Assessment for Nepean Tunnel Amplification Project*, Sydney Water.

Strahler, A 1964, 'Quantitative geomorphology of drainage basins and channel networks', in V Chow (ed.), *Handbook of Applied Hydrology*, McGraw-Hill, New York.

White, B & McDonald, J 2010, 'Lithic Artefact Distribution in the Rouse Hill Development Area', *Australian Archaeology*, vol. 70, pp. 29–38.

Appendices

DRAFT

Appendix 1 AHIMS results

THE FOLLOWING APPENDIX IS NOT TO BE MADE PUBLIC

DRAFT