Metropolitan Coal Vegetation Monitoring

Longwalls 20-22 – Autumn 2020

Prepared for

Metropolitan Coal

MARCH 2021





DOCUMENT TRACKING

Project Name	Metropolitan Coal Vegetation Monitoring Longwalls 20-22 Autumn 2020
Project Number	20SUT-15074
Project Manager	Bronwyn Callaghan
Prepared by	Bronwyn Callaghan, Lauren Perkins, Suzanne Eacott
Reviewed by	Beth Medway
Approved by	Beth Medway
Status	Final
Version Number	V2
Last saved on	16 March 2021
Cover photo	Longwalls 20-22 Vegetation Monitoring Area – Brian Towle and Elizabeth Norris

This report should be cited as 'Eco Logical Australia 2021. *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2020.* Prepared for Metropolitan Coal Pty Ltd.'

ACKNOWLEDGEMENTS

This document has been prepared by Eco Logical Australia Pty Ltd with support from Metropolitan Coal Pty Ltd and Resource Strategies.

Disclaimer

This document may only be used for the purpose for which it was commissioned and in accordance with the contract between Eco Logical Australia Pty Ltd and Metropolitan Coal Pty Ltd. The scope of services was defined in consultation with Metropolitan Coal Pty Ltd, by time and budgetary constraints imposed by the client, and the availability of reports and other data on the subject area. Changes to available information, legislation and schedules are made on an ongoing basis and readers should obtain up to date information. Eco Logical Australia Pty Ltd accepts no liability or responsibility whatsoever for or in respect of any use of or reliance upon this report and its supporting material by any third party. Information provided is not intended to be a substitute for site specific assessment or legal advice in relation to any matter. Unauthorised use of this report in any form is prohibited.

Template 2.8.1

Contents

1. Introduction	
2. Vegetation Mapping	3
3. Methods	6
3.1 Upland swamp monitoring	6
3.1.1 Visual inspections	6
3.1.2 Transect/quadrat monitoring	8
3.1.3 Indicator species	9
3.2 Riparian vegetation	10
3.2.1 Visual Inspections	10
3.2.2 Quadrat monitoring	12
3.2.3 Indicator species	12
3.3 Species identification and nomenclature	13
3.4 Survey timing	13
3.5 Weather conditions	14
3.6 Assessment against performance indicators	17
3.6.1 Upland swamp vegetation	
3.6.2 Riparian vegetation	
4. Results and discussion	19
4.1 Upland swamp vegetation monitoring	19
4.1.1 Visual inspections	19
4.1.2 Transect/quadrat monitoring	
4.1.3 Indicator species monitoring	34
4.1.4 Assessment against performance indicators	41
4.2 Riparian vegetation monitoring	43
4.2.1 Visual inspections	43
4.2.2 Quadrat monitoring	
4.2.3 Indicator Species	56
4.2.4 Assessment against performance indicators	63
4.3 Significant species	65
4.4 Introduced species	66
5. Conclusions	67
5.1 Upland swamp vegetation monitoring	67
5.2 Riparian vegetation monitoring	67
References	68

iii

List of Figures

Figure 1: Metropolitan Coal regional location2
Figure 2: Vegetation communities overlying Longwalls 20 to 22 and surrounds4
Figure 3: Upland swamps overlying and adjacent to Longwalls 20 to 225
Figure 4: Control swamps in which vegetation monitoring is undertaken
Figure 5: Riparian monitoring locations
Figure 6: Monthly rainfall for the study area (September 2008 to June 2020)16
Figure 7: Native species richness within upland swamps supporting Restioid Heath / Banksia Thicket, spring 2009 to autumn 2020, BL = baseline23
Figure 8: Native species richness within upland swamps supporting Tea Tree Thicket, spring 2009 to autumn 2020, BL = baseline
Figure 9: Mean species richness in upland swamps supporting Restioid Heath / Banksia Thicket, spring 2009 to autumn 2020
Figure 10: Mean species richness in upland swamps supporting Tea Tree Thicket, spring 2009 to autumn 202027
Figure 11: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Epacris obtusifolia</i> (spring 2009 to autumn 2020)34
Figure 12: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Pultenaea aristata</i> (spring 2009 to autumn 2020)35
Figure 13: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Sprengelia incarnata</i> (spring 2009 to autumn 2020)35
Figure 14: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Banksia robur</i> (spring 2009 to autumn 2020)
Figure 15: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Callistemon citrinus</i> (spring 2009 to autumn 2020)37
Figure 16: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Leptospermum juniperinum</i> (spring 2009 to autumn 2020)37
Figure 17: Proportion of tagged <i>Epacris obtusifolia</i> which have died at longwall and control valley side swamps (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post mining of Longwalls 20-22.
Figure 18: Proportion of tagged <i>Pultenaea aristata</i> which have died at longwall and control valley side swamps (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post mining of Longwalls 20-22.
Figure 19: Proportion of tagged Sprengelia incarnata which have died at longwall and control valley side swamps (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post mining of Longwalls 20-22.

2008 to autumn 2020, BL = baseline.	54
Figure 21: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Lomatia myricoides</i> (spring 2009 to autumn 2020)	58
Figure 22: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Prostanthera linearis</i> (spring 2009 to autumn 2020) ⁷	59
Figure 23: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, <i>Schoenus melanostachys</i> (spring 2009 to autumn 2020) ⁷	59
Figure 24: Proportion of tagged <i>Lomatia myricoides</i> which have died at longwall and control riparian sites (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post the mining of Longwalls 20-22.	61
Figure 25: Proportion of tagged <i>Prostanthera linearis</i> which have died at longwall and control riparian sites (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post the mining of Longwalls 20-22.	62
Figure 26: Proportion of tagged <i>Schoenus melanostachys</i> which have died at longwall and control riparian sites (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post the mining of Longwalls 20-22.	63
List of Tables	
List of Tables Table 1: Survey timing autumn 2020.	13
Table 1: Survey timing autumn 2020	14
Table 1: Survey timing autumn 2020. Table 2: Monthly rainfall for entire survey period (spring 2008 to autumn 2020) taken from Metropolitan Colliery Meteorological Station Helensburgh 2. Table 3: Summary of weather conditions throughout monitoring period (spring 2008 – autumn 2020).	14
 Table 1: Survey timing autumn 2020. Table 2: Monthly rainfall for entire survey period (spring 2008 to autumn 2020) taken from Metropolitan Colliery Meteorological Station Helensburgh 2. Table 3: Summary of weather conditions throughout monitoring period (spring 2008 – autumn 2020). Table 4: Number of native species recorded in upland swamps (spring 2009 to autumn 2020). Table 5: Species with dieback (Condition score <5) in longwall and control sites supporting 	14 15
 Table 1: Survey timing autumn 2020. Table 2: Monthly rainfall for entire survey period (spring 2008 to autumn 2020) taken from Metropolitan Colliery Meteorological Station Helensburgh 2. Table 3: Summary of weather conditions throughout monitoring period (spring 2008 – autumn 2020). Table 4: Number of native species recorded in upland swamps (spring 2009 to autumn 2020). Table 5: Species with dieback (Condition score <5) in longwall and control sites supporting Restioid Heath / Banksia Thicket, autumn 2020. Table 6: Analysis of Similarities (ANOSIM) of vegetation cover/abundance in control versus 	14 15 25
 Table 1: Survey timing autumn 2020. Table 2: Monthly rainfall for entire survey period (spring 2008 to autumn 2020) taken from Metropolitan Colliery Meteorological Station Helensburgh 2. Table 3: Summary of weather conditions throughout monitoring period (spring 2008 – autumn 2020). Table 4: Number of native species recorded in upland swamps (spring 2009 to autumn 2020). Table 5: Species with dieback (Condition score <5) in longwall and control sites supporting Restioid Heath / Banksia Thicket, autumn 2020. 	14 15 25 28
Table 1: Survey timing autumn 2020. Table 2: Monthly rainfall for entire survey period (spring 2008 to autumn 2020) taken from Metropolitan Colliery Meteorological Station Helensburgh 2. Table 3: Summary of weather conditions throughout monitoring period (spring 2008 – autumn 2020). Table 4: Number of native species recorded in upland swamps (spring 2009 to autumn 2020). Table 5: Species with dieback (Condition score <5) in longwall and control sites supporting Restioid Heath / Banksia Thicket, autumn 2020. Table 6: Analysis of Similarities (ANOSIM) of vegetation cover/abundance in control versus longwall upland swamp sites (spring 2009 to autumn 2020 spring 2019). Table 7: Number of species found to have an increase or decrease in the average	14 25 28 30
Table 1: Survey timing autumn 2020	14253031

	mber of native species recorded in riparian sites across all seasons (spring 2008 to 1902)
_	getation condition and reproductive status of indicator species at control npromised) sites MRIP07 and MRIP08 for spring 2016 to autumn 202060
Table 13: Sun	nmary of Riparian Vegetation monitoring against Trigger Action Response Plan64
•	rcies of conservation significance recorded across vegetation monitoring sites, umn 20206
List of Pla	tes
	np 20, Photo Point 1, showing waterflow and minimal iron-stained seepage – umn 20202
	ern Tributary, adjacent to MRIP05, with water in the pool – autumn 202040
	ern Tributary, MRIP07, Photo Point 2C, downstream view – autumn 20204
	ern Tributary, MRIP08, Photo Point 4, upstream view – autumn 20204
	utah Rivulet MRIP02 area of previous flood impacts – autumn 202048
	ern bank of Waratah Rivulet MRIP02, Photo Point 1 view upstream – autumn 202049
	ern bank of Waratah Rivulet MRIP02, Photo Point 1 view downstream – autumn D4
	ern bank of Waratah Rivulet MRIP02, Photo Point B view downstream – autumn D50
Plate 9: Easte	ern Tributary MRIP05, Photo Point 4a west bank – autumn 202050
Plate 10: East	tern Tributary MRIP09, Photo Point 3 view upstream – autumn 20205
Plate 11: East	ern Tributary, MRIP08, Photo Point 4, cracking – autumn 20205
Plate 12: East	ern Tributary, MRIP08, Photo Point 8, cracking – autumn 202052
List of Ap	pendices
Appendix A	Datasheets
Appendix B	Site Details
Appendix C	Longwalls 305-307 Biodiversity Management Plan – Vegetation Monitoring Performance Indicators
Appendix D	Upland Swamp and Riparian Vegetation Site Species Lists
Appendix E	Vegetation Monitoring Raw Data – Sedgeland-heath Complex Swamps
Appendix F	Vegetation Monitoring Raw Data – Tea Tree Thicket Swamps
Appendix G	Vegetation Monitoring Raw Data – Riparian Sites

Abbreviations

Abbreviation	Description
ANOSIM	Analysis of Similarity
ANOVA	Analysis of Variation
BL	Baseline
ВМР	Biodiversity Management Plan
ELA	Eco Logical Australia Pty Ltd
GPS	Global Positioning System
LW	Longwall
NPWS	National Parks and Wildlife Service
RH	Restioid Heath
TTT	Tea Tree Thicket

1. Introduction

Metropolitan Coal is located near Helensburgh, approximately 30 km south of Sydney and 30 km north of Wollongong (**Figure 1**). Metropolitan Coal is a wholly owned subsidiary of Peabody Energy Australia Pty Ltd.

Metropolitan Coal was granted Project Approval (08_0149) for the Metropolitan Coal Project (the Project) in accordance with Section 75J of the *Environmental Planning and Assessment Act 1979* on 22 June 2009. In accordance with Project Approval Condition 6, Schedule 3, a Biodiversity Management Plan (BMP) was prepared as a component of the Metropolitan Coal Longwalls 20-22 Extraction Plan to manage the potential environmental consequences of the Extraction Plan on aquatic and terrestrial flora and fauna, with a specific focus on swamps (Metropolitan Coal 2014).

The Metropolitan Coal Longwalls 20-22 Biodiversity Management Plan has been superseded by the Metropolitan Coal Longwalls 305-307 Biodiversity Management Plan (Metropolitan Coal 2019b). In accordance with the Longwalls 305-307 Biodiversity Management Plan, the Longwalls 20-22 vegetation monitoring program has continued to be implemented to monitor the potential impacts of Longwalls 20-22 on terrestrial flora, with a specific focus on upland swamp and riparian vegetation.

Mining of Longwall 20 commenced in May 2010 and was completed in April 2014. This autumn 2020 report presents the thirteenth dataset collected post the completion of Longwalls 20-22, with data also collected in autumn and spring from 2014 to 2019 (Eco Logical Australia 2014a – 2020b). Previous data collection and reporting has occurred during the mining of Longwalls 20-22 in spring 2010, autumn and spring 2011, autumn and spring 2012, and autumn and spring 2013 (Eco Logical Australia 2010b – 2013b). Prior to the commencement of mining, baseline data was collected during spring 2008, autumn and spring 2009 and autumn 2010 (Eco Logical Australia 2010a).

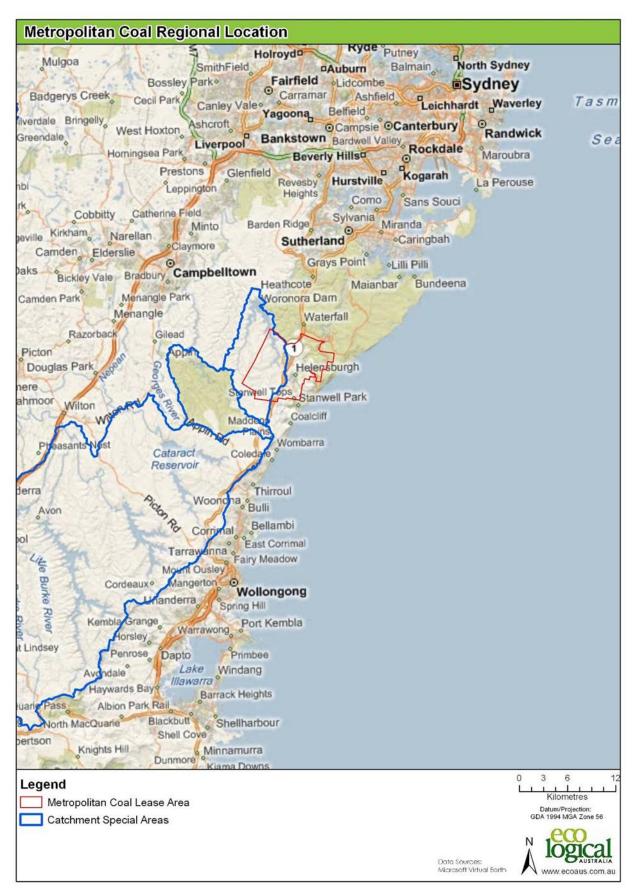


Figure 1: Metropolitan Coal regional location.

2. Vegetation Mapping

Bangalay Botanical Surveys (BBS 2008) mapped eight upland swamps located above or immediately adjacent to Longwalls 20-22 consistent with vegetation mapping by the NSW National Parks and Wildlife Service (NPWS 2003), namely Swamps 16, 17, 18, 20, 23, 24, 25 and 26 (Figure 2 and Figure 3). The vegetation in all eight swamps was classified as 'Sedgeland-heath Complex' consistent with vegetation mapping by NPWS (2003). Sedgeland-heath Complex is a mapping unit that amalgamates the Sedgeland, Restioid Heath and Cyperoid Heath vegetation associations identified by Keith & Myerscough (1993) but amalgamated by NPWS (2003) on the basis that they could not be readily distinguished by air photo interpretation for community mapping (Metropolitan Coal 2014). With the exception of Swamp 20, which subsequent field inspections indicated supports Tea Tree Thicket, all the swamps over Longwalls 20-22 are small and comprise either Banksia Thicket, Restioid Heath, or a combination of the two.

Three of the vegetation patches mapped as swamps (Swamps 16, 17 and 23), although showing seepage, are doubtfully upland swamps, being more akin to Sandstone Heath Woodland with low tree densities (Metropolitan Coal, 2014). The vegetation on these patches has species found in upland swamps, mixed with a range of non-swamp species, including *Banksia serrata*, *Eucalyptus sieberi* and *E. racemosa* in Swamps 16 and 17, and *Angophora hispida* and *Allocasuarina littoralis* in the case of Swamp 23. However, Swamp 23 also has a number of characteristic swamp species, including *Sprengelia incarnata*, *Epacris obtusifolia* and *Pultenaea aristata*, indicating at least some parts of it are quite moist. However, despite this, Swamp 23 is considered to be transitional between swamp and wet heath and somewhat atypical (Metropolitan Coal 2014), and is therefore not included in the monitoring program.

Riparian vegetation occurs along streams which flow to the Woronora Reservoir including the Waratah Rivulet and the Eastern Tributary and some of their tributaries. Vegetation mapped by Bangalay Botanical Surveys (2008) is shown on **Figure 2**. Riparian vegetation includes vegetation mapped as community 4a (Sandstone Riparian Scrub; BBS 2008).

Upland swamp and riparian vegetation surveys are conducted bi-annually in autumn and spring.

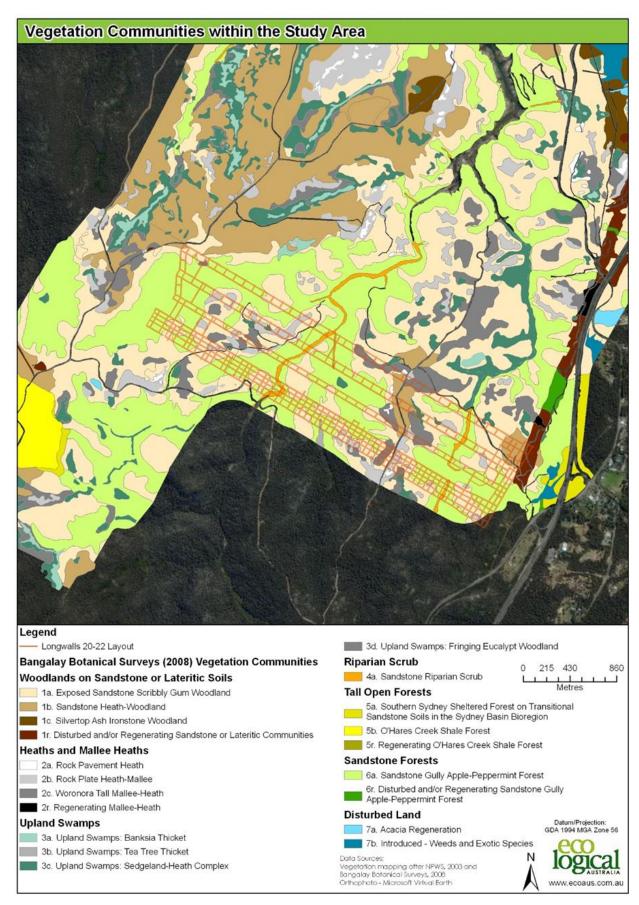


Figure 2: Vegetation communities overlying Longwalls 20 to 22 and surrounds.

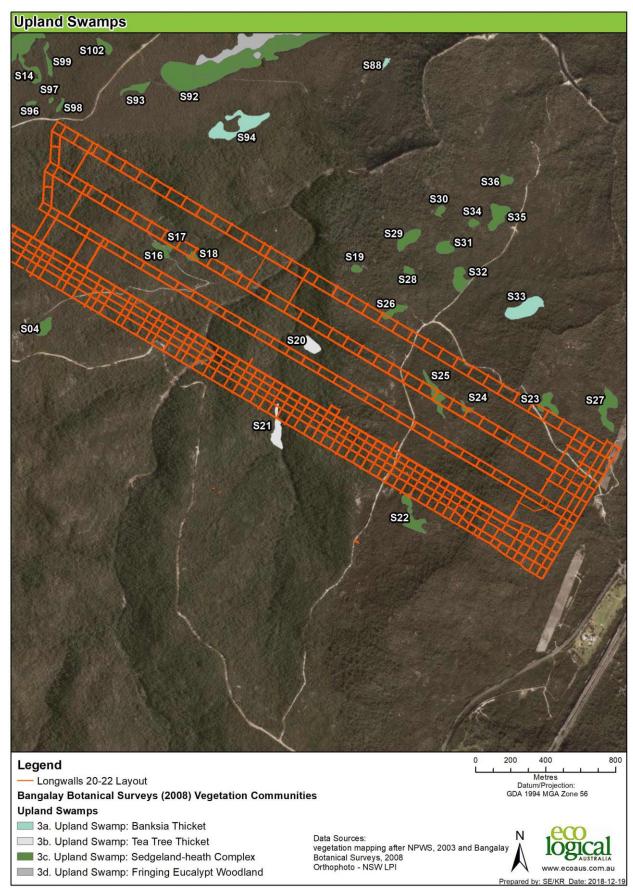


Figure 3: Upland swamps overlying and adjacent to Longwalls 20 to 22.

3. Methods

The vegetation monitoring program for Longwalls 20-22 comprises two main components:

- · monitoring of upland swamp vegetation; and
- monitoring of riparian vegetation.

3.1 Upland swamp monitoring

3.1.1 Visual inspections

Visual inspections were conducted during autumn 2020 in Swamps 16, 17, 18, 20, 24, and 25 overlying and/or immediately adjacent to Longwalls 20-22 (**Figure 3**) and control Swamps 101, 111a, 125, Woronora River 1, Woronora River south arm, and Dahlia Swamp, (**Figure 4**) to record evidence of potential subsidence impacts.

Traverses over the swamps were conducted in autumn 2020 to record:

- cracking of exposed bedrock areas and/or swamp substrate;
- areas of increased erosion, particularly along any existing drainage lines;
- any changes in water colour, particularly evidence of iron precipitation;
- changes in vegetation condition, including areas of stressed vegetation (i.e. plants that demonstrate symptoms of stress) and dead/dying plants that appear unusual; and
- whether the amount of seepage (at the terminal step/over exposed surfaces of the swamp) at the time of inspection appears unusual (relative to recent rainfall).

Photographs of any cracking, erosion, water colour changes and stressed vegetation were recorded, concurrently with a description of these observations, and appropriate global positioning system (GPS – GDA 94 datum) readings taken for established photo points and areas of interest. Seepage areas were documented by photographs of flow over exposed surfaces, e.g. terminal step and exposed sandstone areas.

Traverses aimed at covering the majority of the extent of each swamp were conducted.

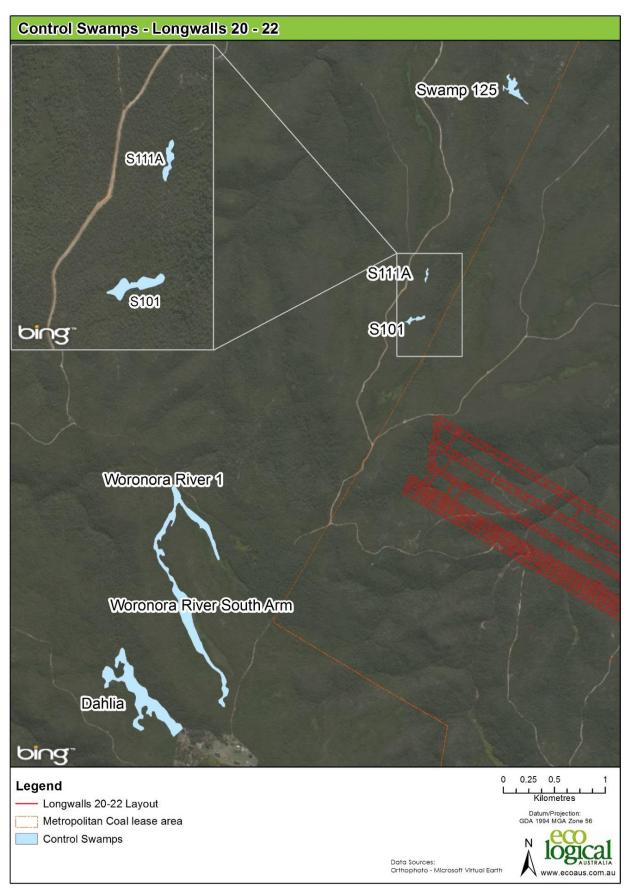


Figure 4: Control swamps in which vegetation monitoring is undertaken.

8

3.1.2 Transect/quadrat monitoring

Transect/quadrat monitoring was conducted during autumn 2020 in Swamps 16, 17, 18, 20, 24, and 25 overlying or immediately adjacent to Longwalls 20-22 and in control Swamps 101, 111a, 125, Woronora River 1, Woronora River south arm, and Dahlia Swamp.

Swamps 16, 17, 18, 24, 25, and control Swamps 101, 111a and 125 are valley side swamps with Restioid Heath / Banksia Thicket and tend to have their longest axis extending horizontally around the slope, perpendicular to the gradient, and are often rather narrow (Metropolitan Coal 2014). Three transects have been established in each of these swamps extending downslope perpendicular to the horizontal long axis and approximately evenly distributed along the long axis.

Swamp 20 is a small in-valley swamp on a second order stream which supports Tea Tree Thicket. Swamp 20 is unique, in that no similar swamps in terms of their geomorphic characteristics are known or have been detected by extensive searches (Metropolitan Coal 2014). Patches of Tea Tree Thicket in three much larger swamps (Woronora River 1, Woronora River south arm and Dahlia Swamp) have been selected as controls for Swamp 20 with the proviso that the condition and floristics of the vegetation in all swamps is similar. Swamp 20 and the corresponding control swamps Woronora River 1, Woronora River south arm, and Dahlia Swamp have their long axis extending downslope. In these swamps transects have been established across the slope perpendicular to the long axis. Three approximately evenly spaced transects have been established in Swamp 20 above the terminal step. As the control swamps are much larger in area, only a single transect has been established in each at a location selected for its similarity to Swamp 20 vegetation.

Transects have been marked with a star picket at each end and at regular intervals (20 m) to ensure that the same transect is sampled each time. Vegetation has also been flagged along this transect (every 5 m) to further aid re-locating the transect line and quadrat positions. For the valley side swamps, vegetation assessment is made on 1 m² quadrats centred on the transect line at 5 m intervals starting from 0 m. For Swamp 20 and the associated control swamps, vegetation assessment is made on 1 m² quadrats placed upslope of the transect line with one quadrat edge located on the line. As these swamps are thickly vegetated, the effects of trampling within the quadrat, if located on the edge and upslope of the transect line, is avoided.

The transect length varies within each swamp and between swamps, however, the statistical analyses to be performed on the quadrat data do not require the transect lengths to be the same between swamps.

The data collected for each quadrat included:

- vegetation structure;
- dominant species;
- estimated cover and height for each stratum;
- full floristics;

 estimated cover/abundance for each species in the quadrat using the following seven-point Modified Braun-Blanquet scale:

Modified Braun-Blanquet Scale:

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover less than 5% of site and common
- 4 = cover 5% 20% of site
- 5 = cover 21% 50% of site
- 6 = cover 51% 75% of site
- 7 = cover 76% 100%
- condition/health rating for each species in the quadrat using the following scale:

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

Photographs of each quadrat and permanent photo points along each transect were taken.

3.1.3 Indicator species

Due to the minimal number of swamps and variation in floristics across the swamps, it has not been possible to select indicator species common to all swamps. Overall, six indicator species have been selected, three for the Restioid Heath / Banksia Thicket swamps and three for the Tea Tree Thicket swamps across both longwall and control sites. Twenty tagged individuals of each species are monitored as follows:

- Epacris obtusifolia monitored in Swamps 18, 24, 25, 101, 111a and 125;
- Sprengelia incarnata monitored in Swamps 24, 101 and 125;
- Pultenaea aristata monitored in Swamps 18, 24, 25, 101 and 111a;
- Banksia robur monitored in Swamp 20, Woronora River 1, Woronora River south arm, and Dahlia Swamp;
- Callistemon citrinus monitored in Swamp 20, Woronora River 1, Woronora River south arm, and Dahlia Swamp; and
- Leptospermum juniperinum monitored in Swamp 20, Woronora River 1, Woronora River south arm, and Dahlia Swamp.

Population monitoring data collected includes:

• condition/health rating for each plant, based on the following scale:

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy
- reproductive rating for each plant, based on the following scale:

Reproductive Status:

- 1 = nil
- 2 = sparse (occasional flowers only)
- 3 = low (under 25% of potential flowering)
- 4 = moderate (25% to 75% of potential flowering)
- 5 = high (over 75% of potential flowering)

All locations of tagged individuals were recorded using a differential GPS providing sub-metre accuracy to enable accurate re-location during future surveys. Tagged individuals were also flagged in the upper branches providing a rapid visual reference point.

3.2 Riparian vegetation

Riparian vegetation is monitored along the Waratah Rivulet (longwall sites MRIP01 and MRIP02 and control sites MRIP03, MRIP04 and MRIP10) and the Eastern Tributary (longwall sites MRIP05, MRIP06, and MRIP09 and control (compromised) sites MRIP07 and MRIP08), (**Figure 5**).

Riparian vegetation monitoring sites MRIP07 and MRIP08 were used as control sites for comparison against the longwall riparian monitoring sites prior to subsidence impacts occurring to pools on the Eastern Tributary at these sites post spring 2016 and before autumn 2017. Analysis from autumn 2017 onwards no longer considers these sites as control sites.

3.2.1 Visual Inspections

Visual inspections of riparian areas were undertaken in locations adjacent to riparian vegetation monitoring sites (MRIP01 – MRIP10, **Figure 5**) together with areas traversed whilst accessing the monitoring sites to record evidence of subsidence impacts including:

- areas of new water ponding;
- any cracking or rock displacement; and
- changes in vegetation condition, including areas of stressed vegetation that appear unusual.

Photographs of any new water ponding, cracking/rock displacement and stressed vegetation were taken, concurrently with a description of the observations, and appropriate GPS readings.

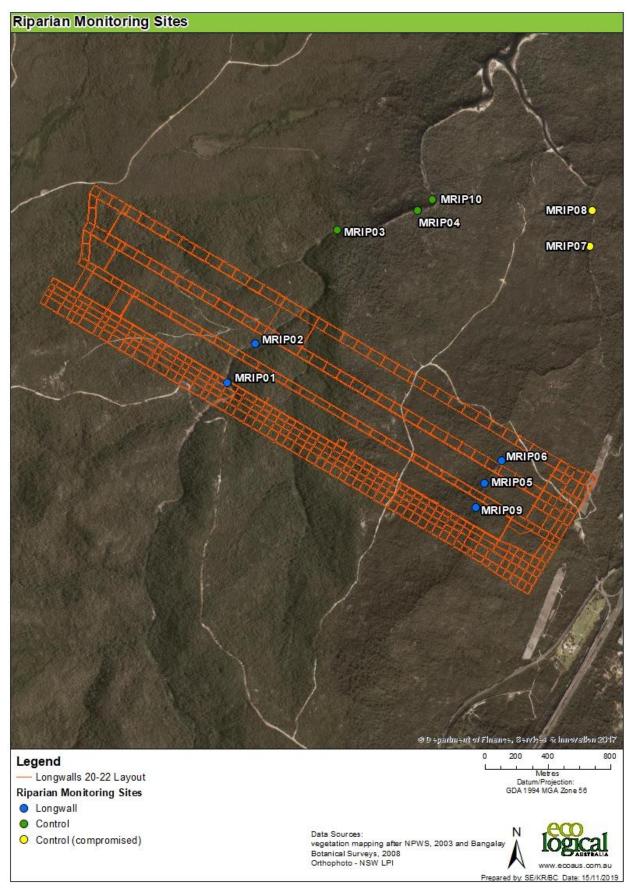


Figure 5: Riparian monitoring locations.

3.2.2 Quadrat monitoring

Permanent quadrats (20 m x 2 m) were established for monitoring riparian vegetation at the following sites:

- sites MRIP01, MRIP02, MRIP05, MRIP06 overlying Longwalls 20-22; and
- sites MRIP03, MRIP04, MRIP07, MRIP08 downstream of Longwalls 20-22.

The data collected for each quadrat included:

- vegetation structure;
- dominant species;
- estimated cover and height for each stratum;
- full floristics;
- estimated cover/abundance for each species using the seven-point modified Braun-Blanquet scale (as per upland swamps, **Section 3.1.2**); and
- condition/health rating for each species in the quadrat (as per uplands swamps, Section 3.1.2).

Permanent photo points have been established for each quadrat.

3.2.3 Indicator species

Three indicator species were selected for population monitoring along Waratah Rivulet and the Eastern Tributary, namely *Prostanthera linearis*, *Lomatia myricoides* and *Schoenus melanostachys*. Twenty tagged individuals of each species are monitored at the following sites, with the exception of site MRIP08 where only 10 individuals of *Prostanthera linearis* were able to be found and tagged:

- sites MRIP01, MRIP02, MRIP05, MRIP06 and MRIP09 overlying Longwalls 20-22; and
- sites MRIP03, MRIP04, MRIP07, MRIP08 and MRIP10 downstream of Longwalls 20-22.

Population monitoring data collected includes:

- condition/health rating for each plant (as per upland swamps, Section 3.1.3); and
- reproductive rating (as per upland swamps, **Section 3.1.3**).

All locations of tagged individuals were recorded using a differential GPS providing sub-metre accuracy to enable accurate re-location during future surveys. Tagged individuals were also flagged in the upper branches providing a rapid visual reference point.

Copies of data sheets used for all the monitoring surveys are provided in Appendix A.

All upland swamp and riparian site details, including GPS waypoints, and transect details are provided in **Appendix B**.

3.3 Species identification and nomenclature

Field guides and standard texts used for the identification of plant species, included:

- Bishop (2000)
- Brooker & Kleinig (2006)
- Fairley & Moore (2010)
- Harden (1992-2002)
- Jacobs, Whalley, & Wheeler (2008)
- Jones (2006)
- Klaphake (2004)
- Pellow, Henwood, & Carolin (2009)
- Robinson (2003)

The naming of plant species recorded during the surveys follows the nomenclature presented in Harden (1992-2002), with subsequent taxonomic updates from NSW Flora Online on PlantNet (the NSW Plant Information Network System) (Royal Botanic Gardens and Domain Trust, Sydney 2019).

3.4 Survey timing

A summary of the timing of vegetation monitoring conducted in autumn 2020 is outlined in **Table 1**.

Table 1: Survey timing autumn 2020.

Upland Swamp sites
Swamp 111a (in part)
Swamp 125
Swamp 17, Swamp 18
Swamp 24, Swamp 25
Swamp 20
Woronora River 1, Woronora River south arm
Swamp 101
Swamp 111a (in part)
Swamp 16
Dahlia Swamp
Riparian monitoring sites
MRIP03 (in part), MRIP04, MRIP10
MRIP05, MRIP06, MRIP09
MRIP01, MRIP02
MRIP07, MRIP08
MRIP03 (in part)

3.5 Weather conditions

The weather conditions during the autumn 2020 survey period were generally similar to previous autumn survey periods. Overall, the temperatures in autumn 2020, as recorded at Bellambi Meteorological station, ranged from a minimum of 7.6° C to a maximum of 35.1° C, similar to previous autumn seasons including autumn 2015 (6.7° C $- 31.5^{\circ}$ C) and the previous autumn 2019 (10.4° C $- 34.6^{\circ}$ C).

The total monthly rainfall from September 2008 to June 2020, encompassing the entire survey period (November 2008 to May 2020), taken from the Metropolitan Colliery Meteorological Station Helensburgh 2, is presented with the long term mean monthly rainfall in **Table 2** and **Figure 6**.

Table 2: Monthly rainfall for entire survey period (spring 2008 to autumn 2020) taken from Metropolitan Colliery Meteorological Station Helensburgh 2.

Year	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
2008									89.0	53.5	64.5	82.0
2009	35.5	210.0	102.0	155.5	152.5	80.5	55.5	5.0	26.0	120.5	63.5	63.5
2010	37.0	182.5	118.5	30.5	89.5	169.0	47.5	43.0	173.5	75.0	103.5	90.5
2011	42.0	4.0	164.5	59.5	51.0	167.0	169.5	91.0	75.0	80.0	162.5	76.0
2012	180.5	242.0	235.5	117.5	15.0	129.5	45.5	5.5	22.5	63.5	54.5	28.0
2013	171.0	220.5	67.0	104.5	106.5	283.5	7.0	11.0	80.5	12.0	217.5	54.5
2014	31.5	50.5	218.5	59.0	11.5	28.0	8.0	93.0	25.5	79.5	39.5	182.5
2015	113.5	96.0	32.5	445.0	101.5	62.5	53.0	81.5	38.5	30.5	119.0	60.5
2016	275.0	31.0	46.5	55.5	36.0	394.5	92.5	84.0	52.5	15.5	36.0	67.5
2017	63.0	172.0	404.5	70.0	13.5	174.5	12.5	18.5	0.5	37.0	39.0	52.5
2018	38.0	83.0	139.0	19.0	11.5	95.5	1.0	16.0	41.0	175.5	117.0	93.5
2019	58.0	44.0	180.5	24.0	6.5	88.5	36.5	48.0	130.0	29.5	40.0	2.5
2020	88.5	550.5	132.5	75.5	75.0	48.0						
Mean*	131.2	159.5	154.3	126.1	128.1	144.7	96.0	88.9	77.2	91.5	104.9	103.0

Survey periods highlighted.

The current autumn 2020 survey was undertaken following an extended dry period from July 2017 onwards. Throughout this period, monthly rainfall remained below average for most months, with isolated exceptions including February 2020 which had well above average rainfall. During the autumn 2020 survey, rainfall for the month of March was close to average but remained well below average in April and May.

^{*} Mean data taken from Bureau of Meteorology Station Number 068024 (Darkes Forest), established in 1894 (Source: www.bom.gov.au, July 2020). Each monthly long-term mean is calculated using all data obtained since the commencement of monitoring at Station 068024.

The rainfall preceding and during vegetation surveys has been discussed in the previous reports (Eco Logical Australia 2010a – 2020b)¹, and is summarised in the table below (**Table 3**).

Table 3: Summary of weather conditions throughout monitoring period (spring 2008 – autumn 2020).

Survey Season / Period	Conditions prior to survey/s	Rainfall during survey/s						
Spring 2008	Dry conditions	Low rainfall						
Autumn 2009	Wet conditions (above average rainfall February 2009)	Moderate to high rainfall (rainfall slightly above average for all survey months)						
Spring 2009	Dry conditions (most months well below average rainfall)	Low rainfall (below average rainfall for all survey months						
Autumn 2010	Wetter conditions	Moderate rainfall						
Spring 2010 – Autumn 2012	Wet conditions (many months above average during this period)	Moderate to high rainfall						
Spring 2012	Dry conditions (all winter months well below average rainfall)	Low rainfall						
Autumn 2013	Wetter condition (many months above average rainfall immediately preceding)	Moderate to high rainfall						
Spring 2013	Wetter conditions followed by dry winter	Moderate to high rainfall						
Autumn 2014	Average conditions	Low rainfall						
Spring 2014	Dry conditions	Low to moderate rainfall						
Autumn 2015	Moderately wet conditions	High rainfall (exceptionally high rainfall in April 2015)						
Spring 2015	Moderate to dry conditions (all winter months well below average rainfall)	Low to moderate rainfall						
Autumn 2016	Wet conditions (above average rain in November 2015 and very heavy rain in January 2016)	Low rainfall (below average rainfall for all survey months)						
Spring 2016	Wet conditions (heavy rain in June 2016)	Low rainfall (below average rainfall for all survey months)						
Autumn 2017	Wet conditions (heavy rain in March 2017)	Low rainfall (below average rainfall for most of survey period)						
Spring 2017 – Autumn 2018	Dry conditions (rainfall well below average from July 2017 onwards)	Low rainfall (below average rainfall for all survey months)						
Spring 2018	Dry conditions (rainfall well below average from July 2017 onwards)	Moderate rainfall (above average rainfall for October and November 2018)						
Autumn 2019	Dry conditions (rainfall well below average for all summer months)	Low to moderate rainfall (above average rainfall March 2019 only)						
Spring 2019	Dry conditions (rainfall well below average for all late autumn and winter months)	Low to moderate rainfall (above average rainfall September 2019 only)						
Autumn 2020	Moderately wet conditions (rainfall below average for December 2019 and January 2020, but heavy rain February 2020)	Low to moderate rainfall (close to average rainfall March 2020, below average for remaining survey months)						

¹ Previous reporting has based mean rainfall data on Bureau of Meteorology Station No. 068228 (Bellambi). Reports since autumn 2017 have used Darkes Forest Station No. 068024 which has a longer rainfall record for comparison of long term means.

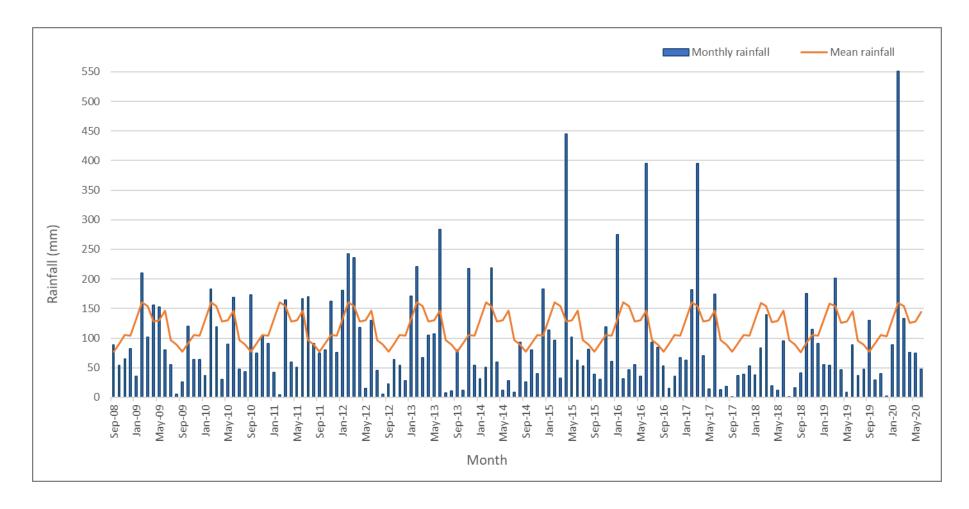


Figure 6: Monthly rainfall for the study area (September 2008 to June 2020).

Observational data from HELENSBURGH 2 Metropolitan Coal weather station (Source: Manly Hydraulics Laboratory, www.mhl.nsw.gov.au, July 2020). Mean data taken from Bureau of Meteorology Station Number 68024 (Darkes Forest), established in 1894 (Source: www.bom.gov.au, July 2020).

3.6 Assessment against performance indicators

The monitoring results from the autumn 2020 survey have been analysed and assessed against the performance indicators developed for upland swamp vegetation monitoring and riparian vegetation monitoring in accordance with the Longwalls 305-307 Biodiversity Management Plan (Appendix C).

3.6.1 Upland swamp vegetation

Visual observations

The information recorded during these inspections is used to make an assessment of changes in the condition of the swamps over time.

Transect/quadrat monitoring

The data collected from the transect/quadrat monitoring was analysed as follows:

- Analysis of the number of species (i.e. species richness) overtime and relative to control sites
 using analysis of variance (ANOVA). The purpose of ANOVA is to test for significant differences
 in floristic diversity over time. The analysis was conducted using the R statistical package v 3.6.2.
- Analysis of species lists using Cluster Analysis (ANOSIM). Cluster Analysis is a method used for combining similar objects into groups or clusters and is used to test for significant differences in species cover/abundance and condition scores overtime and relative to control sites. ANOSIM looks at groups of sites in multidimensional space and compares them with other groups to see if they are different. Data for the ANOSIM analysis were based on the average cover/abundance and average vegetation condition across all quadrats for each transect, whether a species was present or not: i.e. the transect is considered the unit of comparison. The analysis was conducted using the R statistical package v 3.6.2.

Indicator species monitoring

The data collected from indicator species monitoring is qualitatively analysed for the proportions of plants surviving, and differences in health and reproduction ratings over time and relative to control swamps.

Assessment against upland swamp vegetation performance indicator

The visual inspections, transect/quadrat data and population monitoring of indicator species is used to assess the upland swamp vegetation performance indicator:

The vegetation in upland swamps is not expected to experience changes significantly different to vegetation in control swamps.

3.6.2 Riparian vegetation

Visual inspections

The information recorded during these inspections will be used to make an assessment of changes in the condition of the riparian vegetation over time.

Quadrat monitoring

The vegetation structure data, including dominant species, height and estimated cover for each stratum, collected from the quadrat monitoring is qualitatively assessed. The full floristics and associated cover/abundance and condition data is analysed to provide an assessment of trends between monitoring sites, and over time, in overall species richness as well as the cover/abundance and condition of particular species.

Indicator species monitoring

The data collected from the indicator species monitoring is qualitatively analysed for the proportion of plants surviving over time and relative to control sites, and differences in health and reproduction ratings over time and relative to control sites.

Assessment against riparian vegetation performance indicator

The vegetation monitoring conducted at locations adjacent to riparian vegetation monitoring sites and areas traversed whilst accessing the monitoring sites is used to assess the extent of riparian dieback against the riparian vegetation performance indicator:

Impacts to riparian vegetation are expected to be localised and limited in extent, similar to the impacts previously experienced at Metropolitan Coal.

The riparian vegetation performance indicator will be considered to be exceeded if vegetation monitoring:

- identifies an increase in the extent of vegetation dieback compared to that observed at site MRIP02 on the Waratah Rivulet and between sites MRIP05 and MRIP09 on the Eastern Tributary; or
- identifies vegetation dieback greater than 50 cm from the stream at sites MRIP01, MRIP03, MRIP04, MRIP06, MRIP07, MRIP08, MRIP10 as a result of mine subsidence.

4. Results and discussion

A list of all flora species recorded during the autumn 2020 monitoring survey is presented in **Appendix D**.

4.1 Upland swamp vegetation monitoring

4.1.1 Visual inspections

Visual inspections were conducted across all upland swamp sites during the autumn 2020 survey. Traverses covering the majority of the extent of each swamp were conducted, and the following provides a summary of the visual observations:

- No cracking of exposed bedrock areas or swamp sediments was observed in either longwall or control swamps, other than the rock displacement in Swamp 24 and minor surface cracking (weathering cracks) in Swamp 18 detected during baseline surveys (Eco Logical Australia 2010a).
- Areas in which active erosion was observed were generally minor and limited to sheet erosion (Swamps 18, 20, 24, 25, 101 and Dahlia Swamp), with moderate erosion on the track at Woronora River 1 and substantial erosion along the creek adjacent to Transect 2 in control Swamp 125. Active erosion has previously been observed, at some stage throughout the monitoring period, at all longwall and control sites.
- The autumn 2020 survey commenced following an extended dry period from July 2017 onwards. Throughout this period, monthly rainfall has remained below average for most months, with isolated exceptions including February 2020, which had well above average rainfall. During the autumn 2020 survey, rainfall for the month of March was close to average but remained well below average in April and May. The limited rainfall leading up to, and the intense rainfall immediately prior to, the survey season is reflected in the variability of seepage recorded longwall valley side swamps:
 - Abundant (Swamps 16, 17, 24, 25 and 125);
 - Moderate (Swamp 18); and
 - Absent (Swamps 101 and 111a).

In the single Tea Tree Thicket longwall site, Swamp 20, there was abundant seepage around the waterfall area (**Plate 1**) and the end of Transect 1. Abundant seepage was also observed at control site, Woronora River 1, but was absent from the remaining two Tea Tree Thicket control sites, in autumn 2020.

• Across all valley side swamps, no changes in water colour or new areas of water ponding were observed in either longwall or control swamps in autumn 2020. Water was clear and flowing in the creek line at control site Swamp 125 adjacent to Transect 2, where a stagnant pool was observed in the previous spring 2019 survey. Standing water was observed within the single Tea Tree Thicket longwall site, Swamp 20, particularly along Transect 1, and abundant water flow was observed across the terminal rocky step. Iron-stained groundwater seeps have previously been observed in Swamp 20 on the terminal rocky step and/or the small rocky step adjacent to the end of Transect 1. In autumn 2020, iron staining remained similar to previous survey periods

- (**Plate 1**). Water was present and clear in the creek at Woronora River 1, where water has previously been observed.
- For the valley side swamps supporting Restioid Heath / Banksia Thicket, vegetation in autumn 2020 at both longwall and control sites was found to be in an improved condition, compared to previous surveys. In previous seasons, vegetation condition has been observed varying from healthy to stressed, with a number of shrubs and ground layer species recorded with leaf yellowing and dieback. In the current autumn 2020 survey, healthy individuals of all species previously noted with dieback were observed within all swamps, with new growth commonly recorded. Visual observations noted the following details regarding vegetation stress of particular species, vegetation layers and swamps:
 - Stressed individuals, individuals with yellowing foliage, or scattered dead individuals of the shrub species *Banksia ericifolia* subsp. *ericifolia* (Swamps 17, 18, 111a and 125). Individuals of this species observed with dieback were interspersed with healthy individuals of the same species.
 - o Isolated senescing individuals of *Isopogon anethifolius* were observed at one control site only (Swamp 125).
 - Within the ground layer, standing dead litter of sedge species was observed in most longwall and control sites, however new growth of these species was commonly recorded, including Chordifex dimorphus, C. fastigiatus, Cyathochaeta diandra, Lepidosperma filiformis, Lepyrodia scariosa and Schoenus brevifolius (all longwall and control sites).
 - The stressed and senescent shrubs and ground layer species reported as common and widespread in Swamp 24 in previous seasons (spring 2017 and autumn 2018) have not increased in extent or number for the past three monitoring seasons, and the previously reported senescent shrubs have started to fall over.
- For the Tea Tree Thickets swamps, vegetation at both longwall and control swamps was found to be generally in a good condition in autumn 2020. Vegetation condition improved for a number of species within both longwall and control sites, including:
 - Regrowth of the fern species Gleichenia microphylla within all Tea Tree Thicket Swamps control swamps, and although old patches of dieback are still apparent within Swamp 20, regrowth of this species was observed throughout the swamp in autumn 2020.
 - The sedge Empodisma minus was found to be in an improved condition in Swamp 20 compared to previous seasons, particularly along Transect 1 where regrowth of this species was observed. In control swamps this species remained in a healthy condition in autumn 2020, with new growth observed at Woronora River south arm.
 - In addition to the two above-mentioned species, other understorey species previously observed with leaf-yellowing and minor dieback at both longwall Swamp 20 and control sites, including *Chorizandra cymbaria* and *Lepidosperma limicola*, were in an improved condition in autumn 2020.
 - O The condition of *Banksia robur* shrubs was similar within the single longwall swamp (Swamp 20) and the control swamps, with reduced condition related to leaf herbivory commonly observed, as has been observed in previous seasons.

• No weed species were observed within any of the longwall swamps during the autumn 2020 visual inspections. Two weed species, namely *Conyza* sp. (Fleabane) and *Solanum nigrum* (Blackberry Nightshade), were recorded within control site Dahlia Swamp, where weeds have previously been recorded in low densities.



Plate 1: Swamp 20, Photo Point 1, showing waterflow and minimal iron-stained seepage – autumn 2020.

4.1.2 Transect/quadrat monitoring

Vegetation structure, dominant species, and estimated cover for each stratum

The vegetation structure, dominant species and estimated cover for each stratum at upland swamp monitoring sites is provided in **Appendices E** and **F**.

The vegetation structure, dominant species and estimated cover for each stratum has been variable across all seasons, with variations recorded between sites, seasons and strata. This variability is considered to reflect both the natural variations in the height and cover of vegetation structural layers through time, as well as the subjective nature of the data collection. Within the variability of this dataset, a general trend towards increasing height and cover of the mid layer vegetation and reduction in cover of the ground layer continues to occur across all longwall and control sites. The increase in height and foliage cover of the mid-storey and subsequent decrease in ground cover is a recognised pattern which typically occurs within upland swamps, with increased time since fire (Keith & Bradstock 1994). With increased time since fire, upland swamps commonly form dense thickets dominated by obligate seeders such as *Banksia ericifolia* subsp. *ericifolia*, *Hakea teretifolia* and *Leptospermum squarrosum* with smaller shrubs and sedges tending to become sparser and less diverse. The formation of these dense thickets is mediated by fires, which reduces the cover of these obligate seeders.

Species richness

A summary of species richness within swamp quadrats since spring 2009 is provided in **Figure 7**, **Figure 8** and **Table 4**. The raw data for each swamp is presented in **Appendices E** and **F**.

As observed for the baseline monitoring period (spring 2009 to autumn 2010), species richness in autumn 2020 was higher in valley side swamps supporting Restioid Heath / Banksia Thicket (Swamps 16, 17, 18, 24, 25, 101, 111a, and 125) than in swamps supporting Tea Tree Thicket (Swamp 20, Woronora River 1, Woronora River south arm and Dahlia Swamp) (**Figure 7**, **Figure 8** and **Table 4**).

Species richness within individual valley side swamps in autumn 2020 was within the range of previous season for all sites. At both longwall and control sites, a small to moderate increase in species richness was recorded at all sites, with the exception on longwall site Swamp 18 and control site Swamp 111a, which both had a large decline in species richness compared to the spring 2019 survey (seven and eight species, respectively).

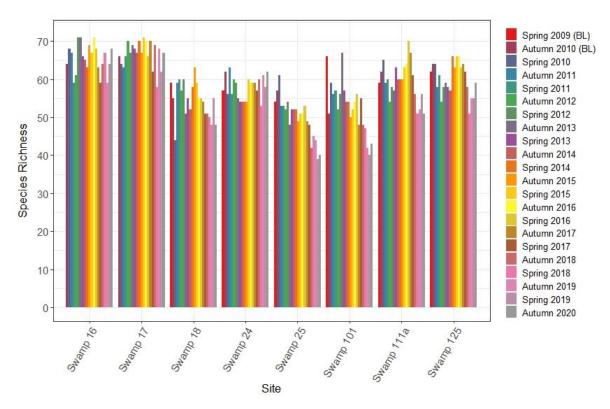


Figure 7: Native species richness within upland swamps supporting Restioid Heath / Banksia Thicket, spring 2009 to autumn 2020, BL = baseline.

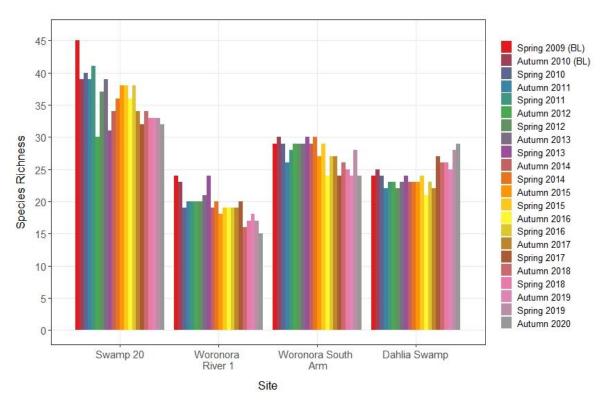


Figure 8: Native species richness within upland swamps supporting Tea Tree Thicket, spring 2009 to autumn 2020, BL = baseline².

.

² Figures for Dahlia Swamp for autumn 2018 and spring 2018 differ slightly from previous reports due to error in exotic species definition.

Species richness within individual Tea Tree Thicket sites in autumn 2020 was within the range of previous seasons at the single longwall (Swamp 20) and at one control site (Woronora River south arm) (**Figure 8**). In autumn 2020, a small decrease in species richness from spring 2019 was recorded for the single longwall swamp supporting Tea Tree Thicket, Swamp 20. Two control sites (Woronora River 1 and Woronora River south arm) also had a small to moderate decrease in species richness, with Woronora River 1 declining below that which has previously been recorded at this site. A small increase in species richness from spring 2019 was recorded at one control site supporting Tea Tree Thicket (Dahlia Swamp). Species richness at Dahlia Swamp in autumn 2020 was the highest recorded for this site throughout the monitoring period.

The changes in species richness recorded in autumn 2020 are consistent with the fluctuations observed within the baseline monitoring period. Similar fluctuations in species richness between longwall and control sites indicates that changes may be attributable to environmental conditions, including the stress associated with drying out of shallow soils during the extended period of below-average rainfall from July 2017 experienced prior to the autumn 2020 survey period.

No weed species were recorded as part of the full floristic data collected within any of the longwall upland swamps. One weed species, namely *Conyza* sp. (Fleabane), was recorded within the control site Dahlia Swamp, where it has previously been recorded in low numbers.

Table 4: Number of native species recorded in upland swamps (spring 2009 to autumn 2020).

Site	Spring 2009	Autumn 2010	Spring 2010	Autumn 2011	Spring 2011	Autumn 2012	Spring 2012	Autumn 2013	Spring 2013	Autumn 2014	Spring 2014	Autumn 2015	Spring 2015	Autumn 2016	Spring 2016	Autumn 2017	Spring 2017	Autumn 2018	Spring 2018	Autumn 2019	Spring 2019	Autumn 2020
	Sp	Αn	Sp	An	Sp	Ā	Sp	An	Sp	An	Sp	Ā	Sp	A								
Swamp 16 (RH)	-	64	68	67	59	61	71	71	66	65	63	69	67	71	68	63	59	64	67	59	64	68
Swamp 17 (RH)	-	66	64	63	66	70	67	69	68	67	70	67	71	70	66	70	62	69	58	68	62	67
Swamp 18 (RH)	59	55	44	59	60	57	60	51	55	52	58	63	59	55	55	54	51	51	50	48	55	48
Swamp 24 (RH)	57	62	56	63	56	60	59	55	54	54	54	54	60	59	59	59	57	60	53	61	58	62
Swamp 25 (RH)	54	57	61	53	53	52	54	48	52	52	52	49	51	51	53	49	48	42	45	44	39	40
Swamp 101 (RH)	66	51	59	56	57	52	56	67	57	54	54	50	52	54	56	48	55	48	47	42	40	43
Swamp 111a (RH)	59	62	65	59	60	54	58	57	63	60	60	60	63	64	70	67	61	56	51	52	59	51
Swamp 125 (RH)	62	64	64	58	61	54	58	59	58	57	66	63	66	66	63	64	62	58	51	55	55	59
Swamp 20 (TTT)	45	39	40	39	41	30	37	39	31	34	36	38	38	36	38	34	32	34	33	33	33	32
Woronora River 1 (TTT)	24	23	19	20	20	20	20	21	24	19	20	18	19	19	19	19	20	17	17	18	17	15
Woronora River south arm (TTT)	29	30	29	26	28	29	29	29	30	29	30	27	29	24	27	27	24	26	25	24	28	24
Dahlia Swamp (TTT) ³	24	25	24	22	23	23	22	23	24	23	23	23	24	21 (2)	23	22	27	26 (1)	26 (2)	25 (1)	28	29 (1)

Numbers in brackets indicate the number of exotic species recorded, additional to native species RH = Restioid Heath; TTT = Tea Tree Thicket

³ Figures for Dahlia Swamp for autumn 2018 and spring 2018 differ slightly from previous reports due to error in exotic species definition.

Transect/quadrat monitoring analysis – species richness

Upland swamp sites were spilt into two groups for analysis on the basis of their floristic differences: Restioid Heath / Banksia Thicket and Tea Tree Thicket swamps.

For the Restioid Heath / Banksia Thicket sites, species richness data were analysed for each season using analysis of variance (ANOVA). No significant differences were detected between longwall and control sites in any season including the current autumn 2020 (p = 0.488; **Figure 9**).

As there is only one Tea Tree Thicket longwall site, the species richness data was not analysed using ANOVA. Instead, a graphical representation of the data is presented in **Figure 10**. Species richness in autumn 2020 within the single longwall swamp (Swamp 20) remained greater than the Tea Tree Thicket control swamps, as in all previous seasons. Species richness in Swamp 20 has been variable over the survey seasons, with 32 species recorded in autumn 2020. Although less than that recorded during the baseline seasons, species richness within Swamp 20 remains within the range of that recorded during all other seasons from spring 2010 (richness ranging from 30 to 41 species). In this respect, the performance indicator has not been exceeded in regard to this analysis.

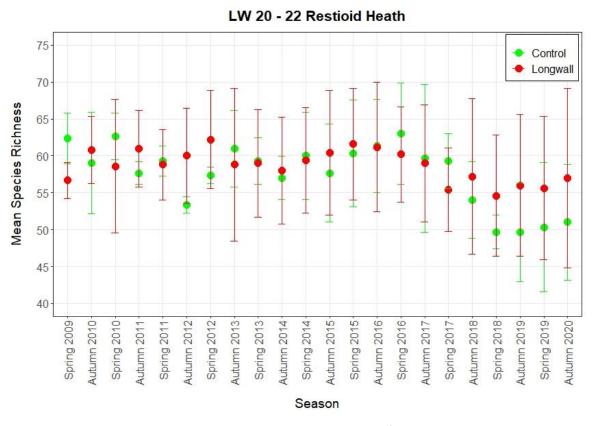


Figure 9: Mean species richness in upland swamps supporting Restioid Heath / Banksia Thicket, spring 2009 to autumn 2020.

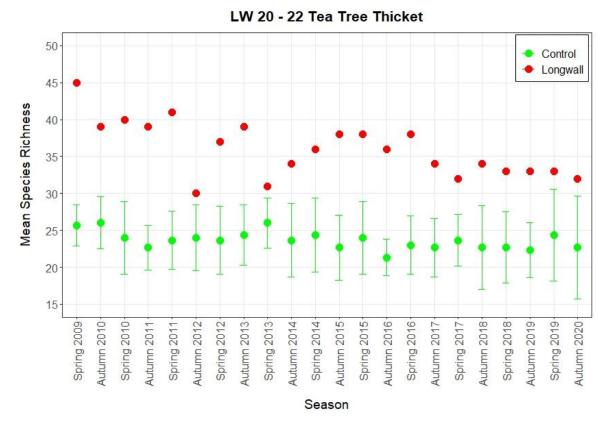


Figure 10: Mean species richness in upland swamps supporting Tea Tree Thicket, spring 2009 to autumn 2020.

Cover/abundance and condition

The cover/abundance and condition ratings for each species are provided in **Appendices E** and **F**.

Fluctuations in species cover/abundance were recorded across all sites. No patterns of increasing or decreasing cover/abundance were identified in relation to individual species across sites or groups of species (i.e. swamp indicator species, generalist species, shrubs, ground covers) within sites.

Fluctuations in vegetation condition were also recorded across all sites. Generally, vegetation within upland swamps was in a healthy condition (Condition 5) to minor dieback (Condition 4) throughout the survey period and observations of increased stress were limited to a small number of species and scattered individuals within most swamps.

Within Restioid Heath / Banksia Thicket sites, a number of species were observed with dieback and leaf yellowing in both longwall and control sites, having condition ratings ranging from minor (Condition 4) to severe (Condition 1) damage/dieback. Species most commonly observed with some dieback were predominantly ground layer sedge species: *Chordifex dimorphus*, *C. fastigiatus*, *Chorizandra cymbaria*, *Empodisma minus*, *Lepidosperma filiforme*, and *Schoenus brevifolius*.

The majority of species which were observed with some dieback within longwall swamps in autumn 2020 were also observed with dieback within control swamps (**Table 5**). Twenty-five species were observed with dieback in longwall swamps and not observed with dieback within control swamps, however seven of these species were not found in control sites in autumn 2020. Dieback of these species was limited to a small number of individuals, generally displaying minor dieback (Condition 4)

(eg. *Lepidosperma limicola*) or some dead branches (Condition 3) (*Epacris paludosa*), rarely with many dead branches (Condition 2) or severe dieback (Condition 1) (*Chorizandra cymbaria*). Thirteen species were observed with dieback within control swamps and not observed with dieback within longwall swamps, however eight of these species were not found in longwall sites in autumn 2020 (**Table 5**). A full list of species and their condition scores, including those observed with dieback, within longwall and control swamps supporting Restioid Heath / Banksia Thicket in autumn 2020 is provided in **Appendix E**.

Table 5: Species with dieback (Condition score <5) in longwall and control sites supporting Restioid Heath / Banksia Thicket, autumn 2020

LONGWALL Sites only	CONTROL Sites only	LONGWALL & CONTROL Sites
Actinotus minor	Banksia oblongifolia	Baeckea imbricata
Baloskion gracile	Chorizandra cymbaria**	Banksia ericifolia subsp. ericifolia
Banksia oblongifolia	Cyathochaeta diandra	Banksia robur
Bauera microphylla	Entolasia stricta	Chordifex dimorphus
Bauera rubioides	Epacris paludosa**	Chordifex fastigiatus
Baumea spp.	Gahnia sieberiana**	Empodisma minus
Bossiaea scolopendria*	Grevillea oleoides	Epacris microphylla
Callistemon citrinus	Isopogon anethifolius	Epacris obtusifolia
Cassytha glabella*	Lepidosperma limicola**	Gleichenia microphylla
Darwinia diminuta	Lepidosperma quadrangulatum**	Hakea teretifolia
Daviesia corymbosa*	Leptocarpus tenax**	Lepidosperma filiforme
Drosera peltata	Leptospermum grandifolium**	Lepidosperma neesii
Eucalyptus racemosa	Leptospermum juniperinum**	Leptospermum squarrosum
Gleichenia microphylla		Lepyrodia scariosa
Kunzea capitata*		Petrophile pulchella
Lepidosperma neesii		Ptilothrix deusta
Leucopogon esquamatus		Schoenus brevifolius
Leucopogon microphyllus var. microphyllus		Xanthorrhoea resinosa
Lomandra obliqua		
Monotoca scoparia*		
Pultenaea aristata		
Pultenaea tuberculate*		
Schizaea bifida*		
Sprengelia incarnata		

Stylidium lineare

The average vegetation condition for each species, that is the mean of the vegetation condition scores recorded for each species across an individual swamp, was calculated from the autumn 2020 data and compared to previous seasons. In autumn 2020 the number of species that had an average vegetation

^{*} species not found in control sites in autumn 2020

^{**} species not found in longwall sites in autumn 2020

condition less than 5 was within the range of previous seasons for most sites, with the exception of control Swamp 111a. This site had fewer species with an average condition score less than 5 than had previously recorded throughout the entire monitoring period. When compared to the previous season, three longwall sites (Swamps 18, 24 and 25) recorded an increase in the number of species with an average condition less than 5. An increase was also observed at two control sites (Swamps 101 and 125). The remaining longwall and control sites recorded a decrease in the number of species with an average condition less than 5, in autumn 2020.

Within Tea Tree Thicket swamps, vegetation was also generally observed in a healthy condition, although dieback was recorded across a number of species within both longwall and control swamps. Within longwall Swamp 20 the main species observed with dieback were also observed with similar levels of dieback within controls swamps (where the same species were present within control swamps) including *Banksia robur*, *Empodisma minus*, *Gleichenia microphylla*, *Sprengelia incarnata* and *Xanthorrhoea resinosa*. Two species recorded with dieback within Swamp 20 were observed in a healthy condition throughout control swamps (*Bauera rubioides* and *Gahnia sieberiana*). For these species, the observed dieback within Swamp 20 was limited to a small number of quadrats with only minor dieback (Condition 4) or rarely some dead branches (Condition 3). Individuals of these species were also present in a healthy condition within Swamp 20 and it was noted in the Visual Observations that there was abundant growth of *Bauera rubioides* along Transect 3. Three species were observed with dieback within control swamps but were not observed with dieback within Swamp 20 (*Banksia ericifolia* subsp. *ericifolia*, *Epacris obtusifolia* and *Petrophile pulchella*).

In recent seasons three species, *Empodisma minus*, *Gleichenia dicarpa* and *Gleichenia microphylla*⁴, have been noted for being recorded in a variable condition within Swamp 20, with dieback ranging from minor (Condition 4) to severe damage/dieback (Condition 1). For several seasons, dieback has been particularly evident in the north-eastern portion of the swamp in the vicinity of the piezometer site and extending downslope and along Transect 1. Based on the plot data in autumn 2020, *Empodisma minus* was in an improved condition overall, with this species recorded as healthy (Condition 5) in the majority of plots (11) in which it occurred across the whole site, whilst it was recorded with minor dieback (Condition 4) in one plot and with some dead branches (Condition 3) in another plot.

The condition of *Gleichenia* spp. was improved along Transect 1, with individuals recorded as healthy (Condition 5) in one plot in which it was observed, in autumn 2020. In one other plot along this transect, old dead individuals were observed but no live cover was recorded. The condition of *Gleichenia* spp. within the rest of Swamp 20 also showed an improvement, with an average condition of 4.7 across Transect 2 and 3, compared to 4.8 in spring 2019, 3.5 in autumn 2019, and the low of 2.5 recorded in spring 2018. In contrast to spring 2018, when *Gleichenia microphylla* was recorded in a healthy condition in only one plot (out of 24), with half of the plots recording the condition of this species as either many dead stems (Condition 2) or severe dieback (Condition 1), in autumn 2020 the majority (22) of the plots in Transects 2 and 3 were recorded as healthy (Condition 5) or with minor dieback (Condition 4). In control swamp Woronora River 1, *Gleichenia microphylla* has been recorded in a similarly variable condition over several seasons. In autumn 2020 this species was recorded in a healthy condition (Condition 5) in the 4 plots it was present in, which represents an overall improvement compared to previous seasons. In control swamp Woronora River south arm, the condition of

⁴ The two *Gleichenia* spp. are treated together here as there has been misidentification in some plots along Transect 1 in previous seasons.

Gleichenia microphylla has improved since spring 2019, with conditions similar to that of longwall Swamp 20, ranging from minor dieback (Condition 4) or healthy (Condition 5). In the remaining control swamp, Dahlia Swamp, the condition of *Gleichenia microphylla* remains similar to the previous seasons, being predominantly recorded as healthy (Condition 5) or with minor dieback (Condition 4).

Transect/quadrat monitoring analysis – vegetation cover/abundance

Upland swamp sites were spilt into two groups for analysis on the basis of their floristic differences: Restioid Heath / Banksia Thicket and Tea Tree Thicket swamps. Analysis of similarities (ANOSIM) was used to examine the differences in vegetation composition, measured by species cover/abundance, between the longwall and control sites for each season, and the results are presented in **Table 6**. As there is only one Tea Tree Thicket longwall site, differences in vegetation cover/abundance were not analysed using ANOSIM.

Significant differences in vegetation composition between longwall and control sites, as measured by species cover/abundance, were observed in the baseline period of spring 2009. No significant differences have been observed from the autumn 2010 baseline period or in any subsequent survey period up to spring 2015. Significant differences have been recorded since autumn 2016 through to the autumn 2019 survey, apart from autumn 2017, when the difference was marginal, but not statistically significant. In the current autumn 2020 survey, no significant difference in vegetation composition between longwall and control sites was recorded although this was again marginal (**Table 6**).

Table 6: Analysis of Similarities (ANOSIM) of vegetation cover/abundance in control versus longwall upland swamp sites (spring 2009 to autumn 2020 spring 2019).

Season	R statistic	p-value
Spring 2009	0.188	0.017
Autumn 2010	0.068	0.189
Spring 2010	0.124	0.071
Autumn 2011	0.064	0.208
Spring 2011	0.076	0.150
Autumn 2012	0.019	0.383
Spring 2012	0.122	0.116
Autumn 2013	-0.012	0.477
Spring 2013	0.004	0.414
Autumn 2014	-0.012	0.479
Spring 2014	0.034	0.342
Autumn 2015	0.056	0.303
Spring 2015	0.106	0.090
Autumn 2016	0.161	0.045
Spring 2016	0.195	0.019
Autumn 2017	0.144	0.053
Spring 2017	0.212	0.022
Autumn 2018	0.188	0.027

Season	R statistic	p-value
Spring 2018	0.170	0.038
Autumn 2019	0.177	0.037
Spring 2019	0.095	0.101
Autumn 2020	0.149	0.054

Baseline period highlighted; seasons where significant differences were recorded (p-value < 0.05) are bold. Marginal differences in red font.

A qualitative review of individual site cover/abundance data indicated that in spring 2017, there were differences in vegetation cover/abundance changes between longwall and control sites, with more species in longwall swamps recording small declines in cover/abundance since the previous autumn 2017, compared to control swamps. In the current autumn 2020 survey, as with all surveys after spring 2017, there was no trend in the vegetation cover/abundance data between longwall and control sites. Two longwall sites (Swamps 16 and 24) had more species with an increase in their average cover/abundance score from spring 2019 than species which had decreases (**Table 7**).

Some of the species recording declines in cover/abundance values in longwall swamps are not found within control swamps, and are represented by one or two individuals only. Many of these species occur in longwall Swamps 16 and 17, which are considered marginal upland swamps as they contain a number of woodland species. Species showing a change in cover/abundance in autumn 2020 from spring 2019 in longwall and control sites are listed **Appendix E**.

Table 7: Number of species found to have an increase or decrease in the average cover/abundance score in autumn 2020, compared to spring 2019.

	Increased Cover/Abundance	Decreased Cover/Abundance
Longwall Sites		
Swamp 16	25	18
Swamp 17	18	24
Swamp 18	12	21
Swamp 24	21	19
Swamp 25	13	15
Total number of species	48 (9)	51 (5)
Control Sites		
Swamp 101	11	15
Swamp 111a	15	19
Swamp 125	18	24
Total number of species	31 (2)	37

Numbers in brackets () indicate species only recorded in either longwall or control sites, in autumn 2020.

Overall, there does not appear to be any trend in the data set to indicate why significant differences have previously been recorded for vegetation cover/abundance. While no significant difference in species composition between longwall and control sites has been observed in the current season, where

differences have been observed in a number of the more recent monitoring seasons since the commencement and completion of longwall mining, the magnitude of difference remained low, as measured by the R statistic, and is similar to observations made during the baseline periods (spring 2009).

Transect/quadrat monitoring analysis – vegetation condition

Analysis of similarities (ANOSIM) was also used to examine the differences in vegetation composition, as measured by the condition of their species assemblages, between the longwall and control sites for each season, and the results are presented in **Table 8**. As with vegetation cover/abundance, differences in vegetation condition for Tea Tree Thickets were not analysed using ANOSIM, due to there being only one Tea Tree Thicket longwall site.

Significant differences between longwall and control sites in the upland swamp vegetation communities, as measured by the condition of their species assemblages, were observed in the first four seasons (spring 2009 to autumn 2011) including the baseline seasons of spring 2009 and autumn 2010. No significant differences were recorded from spring 2011 to autumn 2015 and in the previous autumn 2019 survey. From spring 2015 to the spring 2018 season, significant differences have been observed. In the current autumn 2020 survey, a significant difference in vegetation condition was observed, however as in the previous season the result was marginal. As with the vegetation cover/abundance results, this indicates that the vegetation communities vary between control and longwall sites, based on the vegetation condition of their species assemblages, however the low R statistic indicates that the treatment variable (control versus longwall) has a weak effect on this difference (**Table 8**).

Table 8: Analysis of Similarities (ANOSIM) of vegetation condition in control versus longwall upland swamp sites (spring 2009 to autumn 2020).

Season	R statistic	p-value
Spring 2009	0.176	0.012
Autumn 2010	0.153	0.046
Spring 2010	0.165	0.039
Autumn 2011	0.513	0.002
Spring 2011	0.112	0.108
Autumn 2012	0.072	0.233
Spring 2012	0.088	0.186
Autumn 2013	0.002	0.454
Spring 2013	0.090	0.196
Autumn 2014	0.049	0.311
Spring 2014	0.079	0.203
Autumn 2015	0.075	0.221
Spring 2015	0.152	0.037
Autumn 2016	0.198	0.017
Spring 2016	0.212	0.011

Season	R statistic	p-value
Autumn 2017	0.171	0.035
Spring 2017	0.208	0.028
Autumn 2018	0.195	0.024
Spring 2018	0.197	0.018
Autumn 2019	0.1509	0.059
Spring 2019	0.152	0.055
Autumn 2020	0.173	0.041

Baseline period highlighted; seasons where significant differences were recorded (p-value <0.05) are bold. Marginal differences in red font.

A qualitative review of individual site condition data was carried out by tallying the number of species that had decreased in average vegetation condition since spring 2019 at each site, along with the number of species that had increased in average vegetation condition (Table 9). The number of species that had a decrease in average condition was higher than the number of species that had an increase in average vegetation condition at all sites except one (control site Swamp 111a). In addition the number of species recording a decline in average vegetation condition since spring 2019 in longwall sites were generally higher in longwall sites than in control sites (Table 9). Across all longwall sites, twenty-two species declined in average condition but did not decline at control sites between spring 2019 and autumn 2020. Across all control sites, four species declined in average condition but did not decline at any longwall sites, between spring 2019 and autumn 2020 (Appendix E). These trends may have contributed to the significant difference in vegetation condition between longwall and control sites for autumn 2020.

Table 9: Number of species found to have an increase or decrease in the average condition score in autumn 2020, compared to spring 2019.

	Increased Condition	Decreased Condition
Longwall Sites	_	
Swamp 16	4	10
Swamp 17	9	10
Swamp 18	8	16
Swamp 24	6	18
Swamp 25	6	18
Total number of species	21	39 (4)
Control Sites		
Swamp 101	6	7
Swamp 111a	10	8
Swamp 125	9	14
Total number of species	21	21 (1)

Numbers in brackets () indicate species only recorded in either longwall or control sites, in autumn 2020.

Whilst significant differences in both vegetation cover/abundance and vegetation condition were recorded during the baseline monitoring seasons and survey seasons following the commencement of mining Longwalls 20-22, the associated R statistic has always remained low, indicating that the magnitude of differences has remained similarly low over this time (**Table 6** and **Table 8**). The observed differences, therefore, are considered attributable to natural differences in vegetation cover/abundance and condition between individual swamps. The performance indicator has not been exceeded in regard to this analysis. Notwithstanding this, given the small sample size of this study, consideration has been given to examining why the communities are varying between longwall and control sites.

4.1.3 Indicator species monitoring

Indicator species monitoring data, including a condition/health rating and reproductive rating for each plant, are provided in **Appendices E** and **F**.

Condition scale

Over the entire survey period, including baseline monitoring period (i.e. all surveys up to and including autumn 2010), and across all valley side swamps supporting Restioid Heath / Banksia Thicket, there has been a general decrease in the mean vegetation condition of the tagged indicator species (Figure 11, Figure 12 and Figure 13). This decrease has occurred at both longwall and control swamps and is considered to reflect the natural fluctuations in plant health associated with herbivory, resource competition and ageing plants.

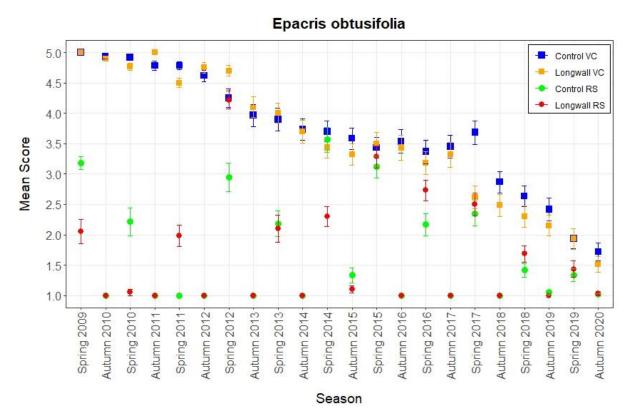


Figure 11: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Epacris obtusifolia* (spring 2009 to autumn 2020).

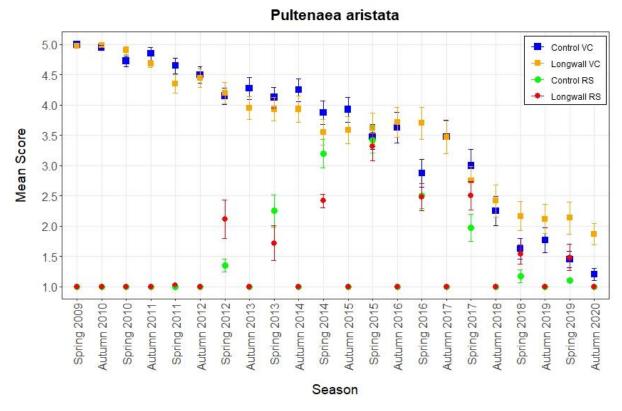


Figure 12: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Pultenaea* aristata (spring 2009 to autumn 2020).

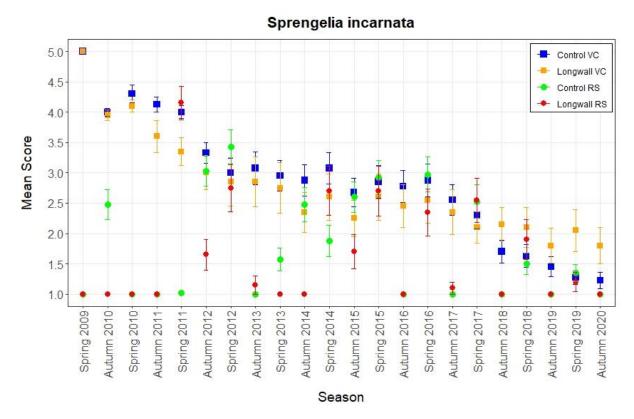


Figure 13: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Sprengelia incarnata* (spring 2009 to autumn 2020).

In autumn 2020, the mean vegetation condition for tagged *Pultenaea aristata* and *Sprengelia incarnata* individuals was greater at longwall sites than control sites, whilst it was similar between longwall and control sites for *Epacris obtusifolia* (Figure 11, **Figure 12** and **Figure 13**). The mean vegetation condition of tagged *Epacris obtusifolia* and *Pultenaea aristata* individuals in both longwall and control sites, and for and *Sprengelia incarnata* in control sites, was lower in the current autumn 2020 survey than previously recorded across all seasons.

Within Tea Tree Thicket monitoring sites, the mean vegetation condition of tagged *Callistemon citrinus* and *Leptospermum juniperinum* individuals has remained relatively consistent in both longwall and control sites across all seasons (**Figure 15** and **Figure 16**), with no observed decline over time, as has been observed in Restioid Heath / Banksia Thicket sites. Although not as extreme as in Restioid Heath / Banksia Thicket sites, tagged *Banksia robur* individuals in both longwall and control sites have shown an overall decline in condition since monitoring began, most noticeably since spring 2017 (**Figure 14**). The mean vegetation condition of tagged indicator species within Tea Tree Thicket vegetation has varied between longwall and control swamps in individual seasons for each species. Generally, the mean vegetation condition of tagged indicator species has been similar in the longwall site, Swamp 20, and control sites over time for *Banksia robur* and *Callistemon citrinus* (**Figure 14**, **Figure 15**), whilst for *Leptospermum juniperinum* the condition has been consistently higher at the longwall site since autumn 2014 (**Figure 16**).

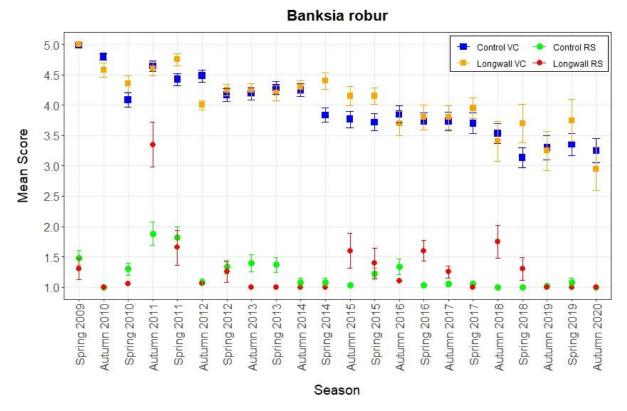


Figure 14: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Banksia robur* (spring 2009 to autumn 2020).

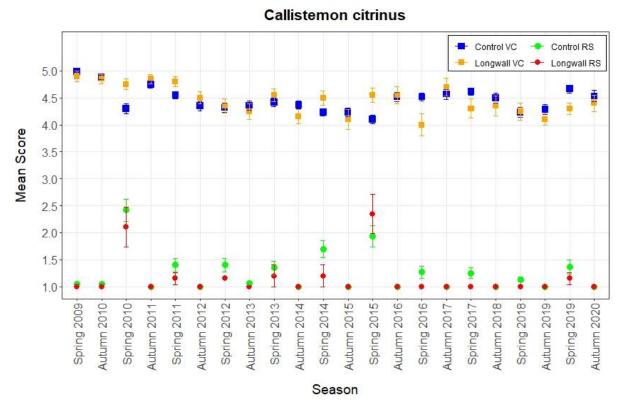


Figure 15: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Callistemon citrinus* (spring 2009 to autumn 2020).

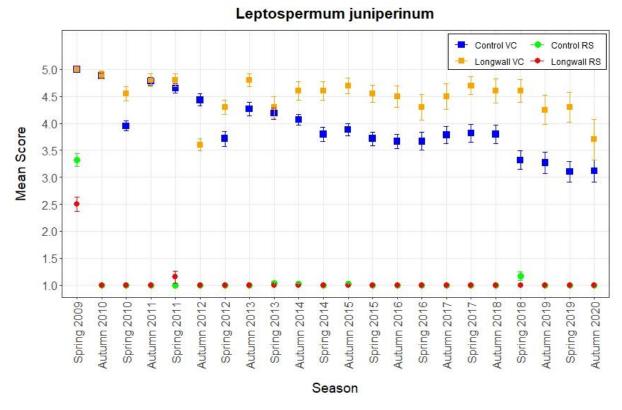


Figure 16: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Leptospermum juniperinum* (spring 2009 to autumn 2020).

In autumn 2020, the mean vegetation condition for tagged *Banksia robur, Callistemon citrinus* and *Leptospermum juniperinum* in Tea Tree Thicket swamps was similar between the longwall site, Swamp 20, and control sites, as indicated by the overlapping error bars (**Figure 14**, **Figure 15** and **Figure 16**).

In autumn 2020, the mean vegetation condition for tagged individuals of *Banksia robur, Callistemon citrinus* and *Leptospermum juniperinum* has decreased in longwall sites when compared to the previous season, spring 2019, whilst it increased in control sites for *Callistemon citrinus* and *Leptospermum juniperinum*. Mean vegetation condition was within that previously recorded across all seasons for all three indicator species at control sites. For longwall sites, the mean vegetation condition was within that previously recorded across all seasons for *Callistemon citrinus* and *Leptospermum juniperinum* whilst for *Banksia robur* it was lower in the current autumn 2020 survey than previously recorded levels across all seasons (**Figure 14**).

Reproductive status

The mean reproductive status, as recorded by flowering status, of tagged indicator species, shows that across all species and seasons flowering has generally been low (Figure 11 to Figure 16). The infrequent recording of flowering plants of indicator species across the entire survey period is thought to be related to the timing of surveys not coinciding with peak flowering periods.

Within valley side swamps supporting Restioid Heath / Banksia Thicket the mean reproductive status of tagged indicator species has been variable between seasons and also between longwall and control sites in individual seasons (Figure 11, Figure 12 and Figure 13). Generally, where differences were observed, as indicated by non-overlapping error bars, the scale of these differences were small (less than 1) although larger differences were observed for selected species in individual seasons. As with most previous autumn monitoring seasons, in autumn 2020 the mean reproductive status was lower than that recorded in spring 2019 for all three indicator species in both longwall and control sites. In autumn 2020, the mean reproductive status of tagged indicator species within Restioid Heath / Banksia Thicket swamps was similar at longwall and control swamps for *Epacris obtusifolia*, *Pultenaea aristata* and *Sprengelia incarnata* individuals (Figure 11, Figure 12 and Figure 13).

Within Tea Tree Thicket swamps mean reproductive status has been similar between longwall and control sites across all seasons, though differences, as indicated by non-overlapping error bars, have been observed in individual seasons (e.g. *Banksia robur* in autumn 2011). In autumn 2020, the mean reproductive status of tagged indicator species within Tea Tree Thicket swamps was similar at longwall and control sites for *Banksia robur*, *Callistemon citrinus* and *Leptospermum juniperinum*, with minimal flowering recorded (**Figure 14**, **Figure 15** and **Figure 16**).

Proportion of plants surviving

In autumn 2020, 210 of the tagged valley side swamp indicator species were recorded in Condition 1 (dead or with severe dieback), increasing from 184 individuals in spring 2019. From spring 2019 to autumn 2020, 29 tagged indicator species individuals declined to Condition 1 after being in a healthier condition in spring 2019, while three individuals recorded in Condition 1 in spring 2019 were recorded in an improved condition in autumn 2020.

The proportion of the total number of tagged individuals of each indicator species which have been recorded as dead (Condition 1) in each season is presented in Figure 17, Figure 18 and Figure 19. In

autumn 2020 the proportion of valley side swamp indicator species which were dead was higher at longwall sites than control sites for *Epacris obtusifolia*. The proportion of tagged *Pultenaea aristata* and *Sprengelia incarnata* individuals recorded in Condition 1 was greater at control sites than longwall sites.

The higher proportion of dead individuals of *Epacris obtusifolia* at longwall sites (0.75) compared to control sites (0.67) in autumn 2020 is a trend which has been recorded since autumn 2015 (**Figure 17**). The season to season increase in the proportion of dead individuals of *Epacris obtusifolia* at longwall sites has been similar in magnitude to that observed for control sites since spring 2017.

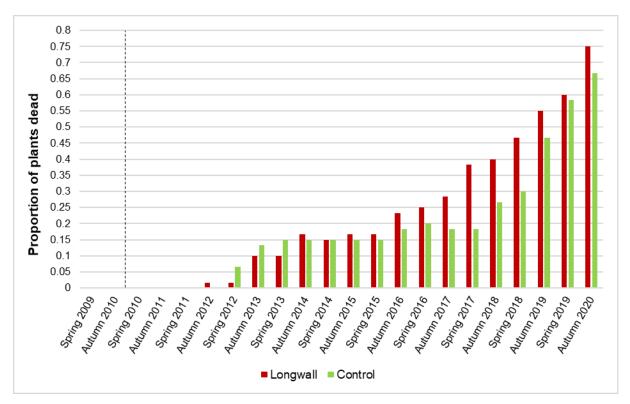


Figure 17: Proportion of tagged *Epacris obtusifolia* which have died at longwall and control valley side swamps (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post mining of Longwalls 20-22.

The higher proportion of dead individuals of *Pultenaea aristata* at control sites (0.86) compared to longwall sites (0.65) in autumn 2020 is a result that has been recorded in the previous four surveys, as well as spring 2016 (**Figure 18**). The seasonal increase in the proportion dead for *Pultenaea aristata* has been reasonably consistent within longwall and control sites since autumn 2013, apart from the large increase recorded for both between spring 2017 and autumn 2018 and the large increase observed in the current season compared to the most recent (spring 2019) for control sites.

The higher proportion of dead individuals of *Sprengelia incarnata* at control sites (0.93) compared to longwall sites (0.7) in autumn 2020 is a relatively new trend that has that has only been recorded since autumn 2018 (**Figure 19**). The increase since spring 2019 in the proportion of dead *Sprengelia incarnata* individuals was similar between longwall and control sites in autumn 2020.

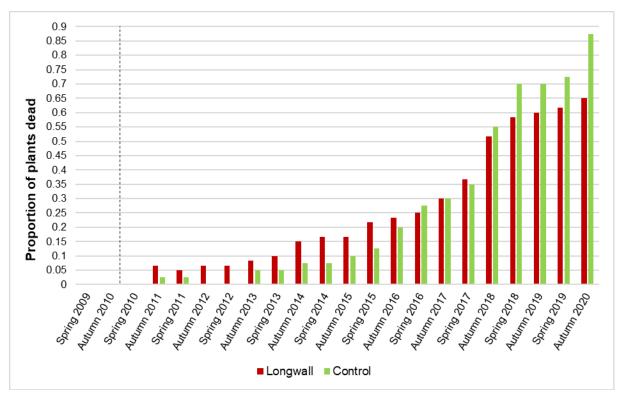


Figure 18: Proportion of tagged *Pultenaea aristata* which have died at longwall and control valley side swamps (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post mining of Longwalls 20-22.

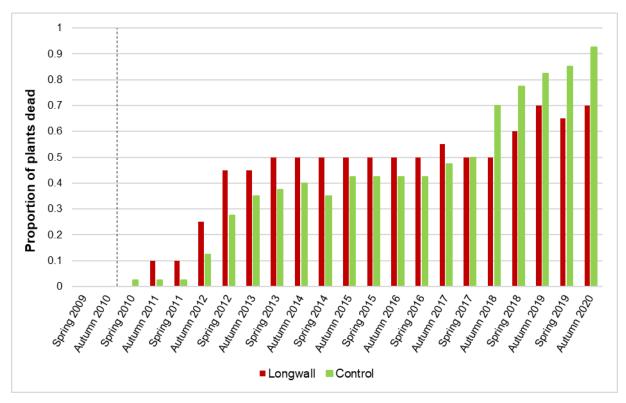


Figure 19: Proportion of tagged *Sprengelia incarnata* which have died at longwall and control valley side swamps (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post mining of Longwalls 20-22.

Prior to the autumn 2018 season, the proportion of dead valley side swamp indicator species has generally been greater at longwall sites than control sites. This trend was reversed from autumn 2018 to the current season for *Pultenaea aristata* and *Sprengelia incarnata*, where the proportion dead has been greater in the control swamps than longwall swamps (**Figure 18** and **Figure 19**). Whilst the rate of increase in proportion dead for *Epacris obtusifolia* diverged between longwall and control swamps from autumn 2016 to spring 2017, this trend has ceased with the large seasonal increases in proportion dead in control sites from autumn 2018 to spring 2019 (**Figure 17**).

In Tea Tree Thicket swamps, 46 individuals of the tagged indicator species were recorded as Condition 1 (dead or with severe dieback) in autumn 2020, increasing from 37 individuals in spring 2019. Of the 46 tagged indicator species recorded as Condition 1 in autumn 2020, 11 individuals were within the single longwall swamp, Swamp 20 (six *Banksia robur* and five *Leptospermum juniperinum*) with 35 individuals (16 *Banksia robur*, 1 *Callistemon citrinus* and 18 *Leptospermum juniperinum*) located within control sites. Due to the low levels of mortality of indicator species observed in Tea Tree Thicket swamps, further analysis was not conducted. As the proportion of individuals in Condition 1 is evenly spread across longwall and control swamps, the observed mortality is attributed to natural factors including predation, ageing plants, competition with other vegetation and abiotic factors.

4.1.4 Assessment against performance indicators

In accordance with the Longwalls 305-307 Biodiversity Management Plan, the visual observations, quadrat monitoring and indicator species monitoring results are used to assess the upland swamp vegetation performance indicator:

The vegetation in upland swamps is not expected to experience changes significantly different to changes in control swamps.

The visual observations, transect/quadrat and indicator species monitoring results are described in **Sections 4.1.1** to **4.1.3** above.

The upland swamp vegetation Trigger Action Response Plan (TARP) from the Longwalls 305-307 Biodiversity Management Plan is provided in **Appendix C**. A summary of the results in relation to the upland swamp vegetation TARP is provided in **Table 10**.

Table 10: Summary of Upland Swamp Vegetation Monitoring against Trigger Action Response Plan.

Performance Indicator	Monitoring Sites	Baseline		Significance Levels/ Triggers	Autumn 2020 Monitoring Results	Action / Response	Comments
The vegetation in upland swamps is not expected to experience changes significantly different to vegetation in control swamps	Swamps 16, 17, 18, 20, 24 and 25 overlying or adjacent to Longwalls 20-22. Control Swamps 101, 111a, 125, Woronora River 1, Woronora River south arm and Dahlia Swamp.	Longwalls 20-22 swamps, as detailed in the LW20-22 vegetation monitoring report for the spring 2008 to autumn 2010 surveys ¹ .	Level 1	Data analysis indicates: there is not a declining trend in the condition of longwall swamp vegetation; and there are no significant changes in vegetation between the mined and control swamps.	Swamps 16, 17, 18, 20, 24 and 25	Continue monitoring. Six monthly reporting.	The declining trend in the condition of longwall swamp vegetation previously recorded by vegetation monitoring in spring 2017 and autumn 2018 for Swamps 16, 17, 18, 24 and 25 has stabilised for the fourth survey season and recovery in the form of new growth on many of the impacted species was apparent in autumn 2020. Dieback of <i>Gleichenia</i> spp. across Swamp 20 has ceased and signs of recovery (regrowth) were observed.
			Level 2	Data analysis indicates: - there is a declining trend in the condition of longwall swamp vegetation over time, however a similar trend is occurring in control swamp vegetation; or - there are significant differences in vegetation between the mined and control swamps, however, the data indicates longwall swamp vegetation is consistent with the baseline monitoring results.	_	Consider swamp groundwater monitoring data. Six monthly reporting.	_
			Level 3	Data analysis indicates: - there is a declining trend in the condition of longwall swamp vegetation over time that is not occurring in control swamp vegetation; or - there are significant differences in vegetation between the mined and control swamps, and the data indicates longwall swamp vegetation is not consistent with the baseline monitoring results.	_	Consider swamp groundwater monitoring data. Initiate assessment against the performance measure ² . Consider the need for management measures, in accordance with Sections 8 and 9.	_

¹ Eco Logical Australia (2010) Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Baseline Data. Report prepared for Metropolitan Coal.

² Threatened species, populations and ecological communities include those listed under the BC Act, EPBC Act or Fisheries Management Act at the time of Project Approval (i.e. the lists current as at 22 June 2009.

4.2 Riparian vegetation monitoring

4.2.1 Visual inspections

Visual inspections of riparian areas have been conducted in locations adjacent to riparian vegetation monitoring sites (i.e. sites MRIP01 to MRIP10) and areas traversed whilst accessing the monitoring sites.

Sites MRIP01, MRIP02, MRIP03, MRIP04 and MRIP10 on the Waratah Rivulet were surveyed in late March, following above average rainfall in February 2020. Overall, these surveys followed an extended dry period from July 2017 onwards, during which monthly rainfall was well below average, apart from October and November 2018 and March and September 2019, during which it rose slightly above average. Water levels at all Waratah Rivulet monitoring sites, both longwall (MRIP01 and MRIP02) and control (MRIP03, MRIP04 and MRIP10), were higher than the previous autumn and spring 2019 surveys when water levels were slightly lower than the previous 2018 seasons. In autumn 2020 water was present, flowing and clear at all longwall and control sites on the Waratah Rivulet. Iron-stained floc was not observed at longwall monitoring sites but was again recorded on the rocks around the waterfall at control site MRIP04 (Photo Point 4a). Minor iron-stained seepage was recorded in longwall monitoring sites, along the bank of the Rivulet at MRIP01 (Photo Point 2) and seeping from fine cracks at MRIP02.

Sites MRIP05, MRIP06, MRIP07, MRIP08 and MRIP09 on the Eastern Tributary were surveyed in late March and mid-April. Overall, water levels at all Eastern Tributary monitoring sites were higher than during the previous spring 2019 survey period. In both the spring 2017 and autumn 2018 surveys, water levels were generally low across all Eastern Tributary sites, with no water observed at MRIP06, very low water levels at MRIP05 and only minor flow at MRIP09 in autumn 2018. In the spring 2018 survey, water flow was present and continuous. During the autumn 2019 survey, no water was observed in MRIP06, was limited to small rock pools at MRIP05, and occurred at very low levels in MRIP09, with no surface flow between these three sites. In the previous spring 2019 survey, water levels were generally higher and water was flowing slowly at all sites on the Eastern Tributary, although surface flow was not continuous between all sites. Water levels in autumn 2020 were similar or greater than those observed in spring 2019. The pool at MRIP05 (ETJ) had been dry in spring 2016, full in autumn 2017, low with no water flow downstream until spring 2018, completely dry in autumn 2019 survey, with water again present in spring 2019. In the current autumn 2020 survey, water levels at this pool remain similar to the previous spring 2019 survey (Plate 2).

Prior to the autumn 2017 survey, mine subsidence impacts to pool drainage behaviour were recorded by Metropolitan Coal (Metropolitan Coal, 2017) at sites MRIP07 and MRIP08⁵. There was little water flow at site MRIP07 and downstream through site MRIP08 during the autumn 2017 and spring 2017 surveys, whilst water flow was present at low levels at both sites in autumn 2018. Water flow was again present in the spring 2018 survey, with water levels high following above average rainfall. During the autumn 2019 survey there was no water present at MRIP07 and very low water levels at MRIP08, resulting in minimal downstream water flow, whilst in the previous spring 2019 survey, low water levels were again present at both MRIP07 and MRIP08. In the current autumn 2020 survey water levels generally remain similar to those observed in spring 2019 (Plate 3 and Plate 4), however there were

⁵ Riparian vegetation monitoring sites MRIP07 and MRIP08 were used as control sites for comparison against the longwall riparian monitoring sites prior to subsidence impacts occurring to pools on the Eastern Tributary at these sites post spring 2016 and before autumn 2017. Analyses from autumn 2017 onwards no longer considers these sites as control sites.

areas of higher water flow noted at both sites (eg. Photo Point 1 at MRIP07; Photo Point 6 at MRIP08). Water at both sites was clear and flowing.

All riparian sites were subject to high water flows in March 2017 and again in February 2020. In both instances, high water flows resulted in impacts including flood-swept and prone vegetation, loss of individual plants, burial of vegetation by adjacent vegetation, and burial by woody flood debris and sediment. In autumn 2020, the extent of bank scouring and undercutting ranged from minor (MRIP01) to major (MRIP02), commonly occurring throughout the entirety of the monitoring sites although often associated with sandy areas where vegetation was lost during high water flows (MRIP02, MRIP05 and MRIP09). Areas of sediment deposition were observed along both the Waratah Rivulet and the Eastern Tributary. The impacts of these events remain evident across all riparian monitoring sites in autumn 2020, including loss and/or senesce of scattered shrubs species, including *Allocasuarina littoralis* and *Banksia ericifolia* subsp. *ericifolia*, attributed to the combined effects of prolonged drought and subsequent high water flows (**Plate 5**).

Vegetation was generally observed in good condition across, and adjacent to, the riparian monitoring sites. Exceptions to the generally good condition of riparian vegetation include the following:

- Plants recorded with dieback throughout all riparian sites tended to be isolated to a few individuals scattered throughout the sites and included the shrubs *Acacia longifolia* subsp. *longifolia*, *Allocasuarina littoralis*, *Banksia ericifolia* subsp. *ericifolia* and *Hakea salicifolia*.
- Vegetation along Waratah Rivulet at longwall site MRIP01 was generally found in good condition. Exceptions to this were the occasional, scattered dead *Banksia ericifolia* subsp. ericifolia and few, scattered dead individuals of *Allocasuarina littoralis* and *Leptospermum* spp.
- Within longwall site MRIP02, along Waratah Rivulet, riparian vegetation in autumn 2020 was commonly flood swept however most individuals appeared to be alive and recovering, particularly the groundcover species: *Bauera rubioides, Baumea* sp., *Schoenus melanostachys* and *Sticherus flabellatus* var. *flabellatus* (**Plate 6**, **Plate 7** and
- Plate 8). Isolated dead individuals of the shrub species Acacia longifolia subsp. longifolia, Allocasuarina littoralis, Banksia ericifolia subsp. ericifolia and Leptospermum squarrosum were observed scattered throughout the site. Dieback was initially recorded at longwall site MRIPO2 during spring 2012 and remained evident up to autumn 2017. In spring 2017, vegetation along both sides of the Waratah Rivulet was observed in an improved condition compared to previous surveys and regeneration was common. In autumn 2018, extensive areas of vegetation dieback were recorded on both sides of the Waratah Rivulet, with patches of dead Gleichenia microphylla and Pteridium esculentum occurring greater than 50 cm from the top of bank. In the previous autumn and spring 2019 surveys, vegetation overall was in an improved condition compared to previous seasons with new growth within areas of previous dieback. Past and current observations of vegetation dieback and loss at this site were due to flood events with areas of prone vegetation evident throughout the site.
- At longwall sites MRIP05 and MRIP06, along the Eastern Tributary, dieback of groundcover and shrub layer vegetation has been previously recorded along a discontinuous band, immediately adjacent to the water's edge (i.e. along the top of bank). As detailed in previous reports (Eco Logical 2019b), vegetation condition at MRIP05 and MRIP06 has fluctuated between dieback and recovery since spring 2013, affecting both ground layer and shrub species, in particular

© ECO LOGICAL AUSTRALIA PTY LTD

Bauera rubioides, Gleichenia microphylla, Schoenus melanostachys and Sporadanthus gracilis. In autumn 2018, dieback was greater than 50 cm from top of bank in some areas at both sites, whilst from spring 2018 to the previous spring 2019 survey vegetation within these patches appeared to improve, with regrowth occurring. In the current autumn 2020 survey, regrowth of groundcover species such as *Gleichenia microphylla* continued to be observed (**Plate 9**), however the impacts of high water flow resulted in flood swept vegetation throughout the site (**Plate 2**). A number of dead *Banksia ericifolia* subsp. *ericifolia* individuals were recorded, lying prone in the water.

• At longwall site MRIP09, along the Eastern Tributary, vegetation was frequently observed to be floodswept and prone following high water flow, however new growth was commonly observed throughout this site, particularly of *Gleichenia microphylla*, *Pteridium esculentum* and *Sticherus flabellatus* var. *flabellatus* (**Plate 10**). Dieback of shrubs and ground layer plants has been observed in this location since spring 2013, extending throughout 2014 and showing signs of improvement in the condition of groundcover species in autumn 2015 (Eco Logical 2018b). Further dieback of groundcover and shrub layer vegetation was observed in autumn 2018 along a discontinuous band immediately adjacent to the water's edge (i.e. the top of bank) at the lower end of MRIP09 (Photo Point 2) and extending discontinuously downstream to MRIP05. The extent of this dieback did not increase between autumn 2018 and spring 2019, with regeneration of shrub species observed between 2016 and the previous spring 2019 survey. Following high water flows, occasional scattered *Banksia ericifolia* subsp. *ericifolia* individuals were observed to be dead and prone at this site, in autumn 2020.

Observations of cracking or rock displacement at the riparian monitoring sites are summarised below:

- No new areas of bedrock cracking were observed within longwall sites MRIP01, MRIP02, MRIP05, MRIP06 and MRIP09 in autumn 2020.
- Cracking of streamside rocky areas at the downstream end of MRIP01, and further downstream between MRIP01 and MRIP02, was first observed during surveys between autumn 2011 and 2012. Since this time, cracking has been observed to increase and pieces of cracked bedrock at these sites have been transported downstream by higher water flows. Cracking and bedrock movement did not change between the spring 2017 and the current autumn 2020 survey.
- Fine hairline cracking of bedrock was observed for the first time at MRIP04 in spring 2019, on the eastern bank below a small scarp (Photo Point 6). No changes to these cracks were observed in the current autumn 2020 survey.
- Cracking of bedrock was observed for the first time at MRIP05 in autumn 2016, at the pool below Photo Point 5 (between sites MRIP05 and MRIP06). In autumn 2017, further cracking was recorded across the rock bar just upstream of the pool, extending across the width of the rock bar, and a second crack was recorded approximately 1 m upstream. In subsequent surveys, including the current autumn 2020 survey, previously recorded cracks at this site appeared unchanged.
- Cracking of a small exposed rocky outcrop at the start of MRIP06 was recorded for the first time in the autumn 2018 survey. In spring 2019, cracking of a rock located along the track between Photo Point 6 and Photo Point 7 was observed for the first time at this site. In the current autumn 2020 survey, the crack appears to have extended and the rock is coming loose.

© ECO LOGICAL AUSTRALIA PTY LTD

- Along the Eastern Tributary at site MRIP07 a new area of in-stream bedrock cracking was recorded for the first time in autumn 2017 at Photo Point 2c, resulting in little water flow at this site and downstream to MRIP08. At this time, cracking was also observed at Photo Point 4, just upstream of site MRIP08. In autumn 2018 an additional small crack was recorded within MRIP07 at Photo Point 1. Additional hairline cracks were observed for the first time in autumn 2019 in MRIP08 at Photo Point 1 and Photo Point 4 (Plate 11). In spring 2019 fragments of cracked rock at Photo Point 4 were missing, presumed to have been washed down stream. In the current autumn 2020 survey, further rock fragments have been removed from this area. Additionally, cracking was observed at MRIP08 on the western bank adjacent the waterfall for the first time in autumn 2020 (Plate 12). Bedrock displacement has not been observed at either MRIP07 or MRIP08.
- Across all observations, including sites MRIP07 and MRIP08, no impacts to adjacent vegetation were observed in association with any of the observed bedrock cracking.

Six introduced species were observed in riparian monitoring sites: *Aster subulatus* (Wild Aster) (MRIP01), *Conyza sp.* (Fleabane) (MRIP01), *Cyperus gracilis* (Slender Flat-sedge) (MRIP01), *Gamochaeta* sp. (Cudweed) (MRIP01), *Hypochaeris radicata* (Catsear) (MRIP01 and MRIP02) and *Paspalum dilatatum* (Paspalum) (MRIP01). No introduced aquatic species have been recorded in streams adjacent to the riparian monitoring sites.



Plate 2: Eastern Tributary, adjacent to MRIP05, with water in the pool – autumn 2020.



Plate 3: Eastern Tributary, MRIP07, Photo Point 2C, downstream view – autumn 2020.



Plate 4: Eastern Tributary, MRIP08, Photo Point 4, upstream view – autumn 2020.



Plate 5: Waratah Rivulet MRIP02 area of previous flood impacts – autumn 2020.



Plate 6: Eastern bank of Waratah Rivulet MRIP02, Photo Point 1 view upstream – autumn 2020.



Plate 7: Eastern bank of Waratah Rivulet MRIP02, Photo Point 1 view downstream – autumn 2020.



Plate 8: Eastern bank of Waratah Rivulet MRIP02, Photo Point B view downstream – autumn 2020.



Plate 9: Eastern Tributary MRIP05, Photo Point 4a west bank – autumn 2020.



Plate 10: Eastern Tributary MRIP09, Photo Point 3 view upstream – autumn 2020.



Plate 11: Eastern Tributary, MRIP08, Photo Point 4, cracking – autumn 2020.



Plate 12: Eastern Tributary, MRIP08, Photo Point 8, cracking – autumn 2020.

4.2.2 Quadrat monitoring

Prior to the autumn 2017 survey, mine subsidence impacts to pool drainage behaviour were recorded by Metropolitan Coal at sites MRIP07 and MRIP08, downstream of Longwall 27 (Metropolitan Coal 2017). Prior to the impacts occurring, sites MRIP07 and MRIP08 were used as control sites for comparison against the longwall riparian monitoring sites. Analyses from autumn 2017 on will no longer consider these sites as control sites (consistent with the Longwalls 305-307 Biodiversity Management Plan).

Vegetation structure, dominant species and estimated cover for each stratum

The vegetation structure, dominant species and estimated cover for each stratum at riparian monitoring sites is provided in **Appendix G**.

Across all seasons (since the surveys commenced in spring 2008), the vegetation structure, dominant species and estimated cover for each stratum has varied between sites and between seasons within sites. Results have generally fluctuated with no clear trends in vegetation height or cover across sites.

In the current autumn 2020 survey an increase in mid-storey foliage cover was observed at a number of sites compared to the previous spring 2019 survey, ranging from 5% to 25% (MRIP01, MRIP03 and MRIP07). Additionally, the cover of the lower storey increased at five sites, ranging between 4% and 56% (MRIP02, MRIP04, MRIP05, MRIP06 and MRIP07). These trends, and the fluctuations observed in other sites, are considered to reflect both the natural variations in the height and cover of vegetation structural layers through time (including in response to flooding impacts), as well as the subjective nature of the data collection.

At MRIP02, cover of understorey was greater than 60% in all seasons up to and including spring 2012, with cover recorded at less than 50% in all seasons after spring 2012, including cover of 15% in spring 2016. This reduction in cover has occurred in conjunction with observations of dieback as discussed in Section 4.2.1 and a shift in dominant species of the ground layer. This is considered to be attributable to the water loss experienced at this site in spring 2012 and altered water levels observed after this time, including periods where the vegetation at site MRIP02 has been submerged or inundated. In spring 2017, cover of the understorey increased to 50% from 45% in autumn 2017, with a shift in dominant ground cover species from largely Sticherus flabellatus var. flabellatus, Gleichenia microphylla and Bauera rubioides to S. flabellatus var. flabellatus and Bauera rubioides, which have been recorded as dominant in previous seasons. A decrease in cover to 20% was recorded in autumn 2018, with extensive areas both sides of the creek observed with dead Gleichenia microphylla and Pteridium esculentum in the lower storey. Cover of the lower storey increased to 40% in the spring 2018 survey, with Sticherus flabellatus var. flabellatus, Gleichenia microphylla and Bauera rubioides again considered most dominant, however a small decline in cover was observed in autumn 2019 to 30%. In the previous spring 2019 survey, cover of the lower storey continued to decline to 25%, with dominant species returning to Sticherus flabellatus var. flabellatus, Gleichenia microphylla and Bauera rubioides. In the current autumn 2020 survey, cover of the lower storey increased to 30% with dominant species being Gleichenia microphylla, Schoenus melanostachys and Sticherus var. flabellatus.

Species richness

A summary of species richness within riparian monitoring sites since spring 2008 is provided in **Table 11** and **Figure 20**. The raw data for each riparian monitoring site is presented in **Appendix G**.

As previously reported, with the exception of longwall site MRIP01 in spring 2010 and control site MRIP04 in autumn 2010, species richness was higher at all sites during the period spring 2008 – spring 2009 than during the period autumn 2010 – spring 2019 (**Table 11** and **Figure 20**). The marked decline in species richness in autumn 2010 occurred at both longwall sites (MRIP01, MRIP02, MRIP05 and MRIP06) and control sites (MRIP03, MRIP04, MRIP07 and MRIP086), although the trend is less consistent at control sites. The decline coincides with a change from a period of drier conditions (spring 2008 – spring 2009) to wetter conditions. Floods and high-water flows have occurred in the wetter seasons since autumn 2010 (see **Table 3**).

In autumn 2020, species richness within riparian monitoring sites was generally similar to previous seasons, with most values falling within the range observed across previous seasons for individual sites. The exception was control site MRIP03, which declined below previously recorded species richness (by two species). When comparing species richness in autumn 2020 to spring 2019, a small increase in species richness occurred at one longwall site (MRIP01) whilst a small to moderate decline in species richness was recorded across two longwall sites (MRIP02 and MRIP05). A large decline in species richness was recorded at longwall site MRIP06 (eighteen species), however this value falls within the range previously recorded at this site. At control riparian monitoring sites, a small to moderate decrease in species richness was observed in autumn 2020, at both monitoring sites (MRIP03 and MRIP04), as well as at control (compromised) sites (MRIP07 and MRIP08).

⁶ Riparian vegetation monitoring sites MRIP07 and MRIP08 were used as control sites for comparison against the longwall riparian monitoring sites prior to subsidence impacts occurring to pools on the Eastern Tributary at these sites post spring 2016 and before autumn 2017. Analyses from autumn 2017 onwards no longer considers these sites as control sites.

Across the entire monitoring period (spring 2008 – autumn 2020), an overall decrease in species richness has been observed in both longwall and control monitoring sites. This trend, however, appears to be reversing for a number of control and longwall sites, with increases in species richness observed since autumn 2017 (MRIP04, MRIP06, MRIP07), spring 2017 (MRIP02) and autumn 2018 (MRIP01). As these trends have been observed across control sites and longwall sites, these changes are considered to be in response to climate, population dynamics and natural disturbances including flood and drought.

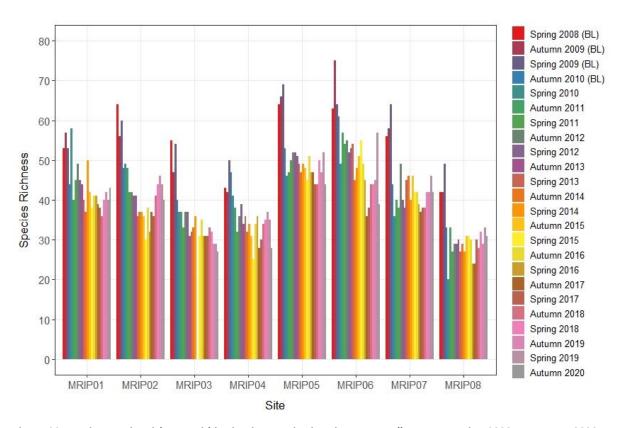


Figure 20: Native species richness within riparian monitoring sites across all seasons, spring 2008 to autumn 2020, BL = baseline.

Table 11: Number of native species recorded in riparian sites across all seasons (spring 2008 to autumn 2020).

Site	Spring 2008	Autumn 2009	Spring 2009	Autumn 2010	Spring 2010	Autumn 2011	Spring 2011	Autumn 2012	Spring 2012	Autumn 2013	Spring 2013	Autumn 2014	Spring 2014	Autumn 2015	Spring 2015	Autumn 2016	Spring 2016	Autumn 2017	Spring 2017	Autumn 2018	Spring 2018	Autumn 2019	Spring 2019	Autumn 2020
Longwall Sites	Spi	Ā	Spi	Ā	Spi	Ā	Spi	Αn	Sp	Au	Spi	Ā	Spi	Αď	Spi	Au	Spi	Ā	Spi	Ā	Spi	Ā	g	Ā
MRIP01	53	57 (1)	53	44 (1)	58 (1)	40	45	49	45	44	40	37	50	42	38	41	41	39	38	36 (2)	40	42	40	43
MRIP02	64	56	60	48	49	48	42	42	41	41	36	37	37	36	30	38 (1)	32 (1)	37 (1)	36	41 (1)	44	47 (1)	44 (1)	40 (1)
MRIP05	64	66	69	53	46	47	50	52	52	51	49	47	49	48	45	51	47	47	44	44	50	47	52	44
MRIP06	63	75	64 (1)	61	49	57	54	55	52	53	54	45	48	51	55	49	45	36	38	44	44	45	57	39
MRIP07	N/A	37	38	38	42	42	46	42																
MRIP08	N/A	24	30	28	32	29	33	31																
Control Sites																								
MRIP03	55	47	54	40 (2)	37	37	33	37	37	31	32	33	36	-	31	35	31	31	31	33	32	29	29	27
MRIP04	43	42 (1)	50	47	41	38	32	36	39	34	36	32	34	31	25	34	36	28 (1)	30	34	35	38	35	28
MRIP07	56	58	64	44	36	40	38	49	40	38	45	46	40	46	42	42	39	N/A						
MRIP08	42	42	49	33	20	33	27	29	29 (1)	30	27	29	27	31	31	30	24	N/A						

NB: numbers in brackets indicate the number of exotic species recorded in addition to native species

^{*} Riparian vegetation monitoring sites MRIP07 and MRIP08 were used as control sites for comparison against the longwall riparian monitoring sites prior to subsidence impacts occurring to pools on the Eastern Tributary at these sites post spring 2016 and before autumn 2017. Analyses from autumn 2017 onwards no longer considers these sites as control sites.

Cover/abundance and condition

The cover/abundance and condition ratings for each species are provided in Appendix G.

Cover/abundance

Fluctuations in species cover/abundance were recorded across all sites and all seasons. In autumn 2020, no patterns of increasing or decreasing cover/abundance were identified in relation to individual species across sites or groups of species (i.e. riparian species, generalist species, shrubs, ground covers) within sites, with the exception of sites MRIP02, MRIP05, MRIP06 and MRIP09 where dieback of streamside vegetation has been recorded along the edge of the stream to varying degrees. For most riparian sites ground layer species are dominated by *Bauera rubioides*, *Gleichenia microphylla*, *Schoenus melanostachys* and *Sticherus flabellatus* var. *flabellatus*.

The foliage cover of *Gleichenia microphylla* at site MRIPO2 has been recorded under 5% in all seasons since dieback was first recorded in spring 2012, reducing from 21-50% cover for the three seasons prior to dieback being observed (i.e. autumn 2011, spring 2011, autumn 2012). In spring 2017, the cover of *Gleichenia microphylla* at MRIPO2 increased to 5-20%, however from autumn 2018 to autumn 2019 it was again recorded in a reduced condition with a cover/abundance of less than 5%. In the previous spring 2019 survey the cover of *Gleichenia microphylla* increased to 5-20%, where it remained in the current autumn 2020 survey. The cover/abundance of *Sticherus flabellatus* var. *flabellatus* at this site increased from 5-20% to 21-50% in autumn 2018 and has remained at this level of cover/abundance up to and including the current autumn 2020 survey.

Condition

The majority of species within all riparian monitoring quadrats at both longwall and control sites were recorded in a healthy condition (Condition 5) in autumn 2020, including species at control (compromised) sites MRIP07 and MRIP08.

Observations of vegetation with dieback included occasional observations of plants with minor dieback (Condition 4) to some dead branches (Condition 3), or rarely severe dieback (Condition 1). In autumn 2020 species for which dieback was observed at both longwall and control sites was limited to *Banksia ericifolia* subsp. *ericifolia*. While one species was recorded with dieback in longwall sites and in a healthy condition in control sites (*Schoenus melanostachys*) the majority of dieback observed for this species was only minor dieback (Condition 4) or rarely some dead branches (Condition 3).

4.2.3 Indicator Species

Indicator species monitoring data, including a condition/health rating and reproductive rating for each plant, are provided in **Appendix G**.

As noted in **Section 4.2.1** and **Section 4.2.2**, riparian control sites MRIP07 and MRIP08, located along the Eastern Tributary, were impacted by mine subsidence between spring 2016 and autumn 2017 and can no longer be used as control sites. However, indicator species monitoring at MRIP07 and MRIP08 has continued.

Indicator species monitoring results at longwall sites MRIP01, MRIP02, MRIP05, MRIP06 and MRIP09 have been analysed and assessed against control sites MRIP03, MRIP04 and MRIP10. The results for sites MRIP07 and MRIP08 are discussed separately.

Condition scale

Overall, mean vegetation condition has decreased over the entire survey period for the three riparian indicator species *Lomatia myricoides*, *Prostanthera linearis* and *Schoenus melanostachys*, within both longwall and control sites, with the level of decline greatest for *Prostanthera linearis* and only a minor decline observed for *Lomatia myricoides* (Figure 21, Figure 22 and Figure 23). The mean vegetation condition for tagged riparian indicator species *Lomatia myricoides* was similar between longwall and control sites throughout the baseline period and all seasons until spring 2012, after which the mean vegetation condition at control sites remained relatively high and consistent across seasons, whilst it was more variable for longwall sites but generally lower than control sites (Figure 21). The mean vegetation condition for tagged riparian indicator species *Prostanthera linearis* has been similar between longwall and control sites across most seasons (Figure 22). Mean vegetation condition has been variable between longwall and control sites for *Schoenus melanostachys* over the entire survey period (Figure 23).

In autumn 2020, the mean vegetation condition of *Lomatia myricoides* was higher at control sites compared to longwall sites (**Figure 21**). At longwall sites, mean vegetation condition decreased below the previously recorded range, as it has continued to do since spring 2018. In autumn 2020, mean vegetation condition of *Lomatia myricoides* at control sites decreased compared to spring 2019, although it remains within the range previously recorded.

In autumn 2020, the mean vegetation condition of *Prostanthera linearis* was greater at longwall than at control sites, as indicated by the non-overlapping error bars (**Figure 22**). At both longwall and control sites the mean vegetation condition decreased below the previously recorded range.

In autumn 2020, the mean vegetation condition of *Schoenus melanostachys* was higher at control sites compared to longwall sites, as indicated by the non-overlapping error bars (**Figure 23**). At longwall sites the mean vegetation condition decreased below the previously recorded range, while mean vegetation condition at control sites also declined but remained within the previously recorded range.

At control (compromised) sites, MRIP07 and MRIP08, the vegetation condition recorded in autumn 2020 for *Lomatia myricoides*, *Prostanthera linearis* and *Schoenus melanostachys* was slightly lower than results recorded in spring 2019, although the decrease was minor (less than 1) (**Table 12**).

Reproductive status

In autumn 2020, the mean reproductive status for tagged riparian indicator species was similar, and minimal, at longwall and control sites for *Lomatia myricoides* and *Schoenus melanostachys*, as indicated by overlapping error bars (**Figure 21** and **Figure 23**). For *Prostanthera linearis*, mean reproductive status was higher at control sites than at longwall sites (**Figure 22**). The mean reproductive status of *Prostanthera linearis* and *Schoenus melanostachys* has been considerably more variable between seasons, and between longwall and control sites within seasons, than for *Lomatia myricoides*, preventing any discernible trend from being detected.

At control (compromised) site MRIP07, the reproductive status for *Lomatia myricoides* and *Schoenus melanostachys* decreased slightly, compared to spring 2019 whilst *Prostanthera linearis* remained unchanged. At control (compromised) site MRIP08, a similar decrease in reproductive status for *Prostanthera linearis* and *Schoenus melanostachys* occurred, whilst *Lomatia myricoides* remained unchanged from the previous spring 2019 survey (**Table 12**).

The extent of flowering recorded for each of the tagged riparian indicator species continues to be comparable to results in previous seasons including the baseline monitoring period. The infrequent recording of flowering plants of *Lomatia myricoides* across the entire survey period is thought to be related to the timing of surveys which do not coincide with peak flowering periods.

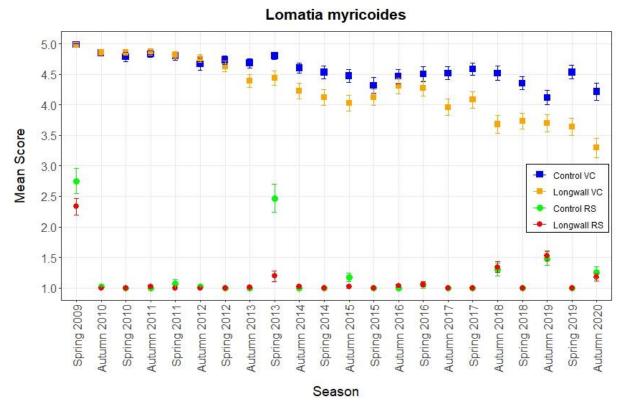


Figure 21: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Lomatia* myricoides (spring 2009 to autumn 2020)⁷.

⁷ Riparian vegetation monitoring sites MRIP07 and MRIP08 were used as control sites for comparison against the longwall riparian monitoring sites prior to subsidence impacts occurring to pool on the Eastern Tributary at these sites post spring 2016 and before autumn 2017. These sites have been removed from all seasons data analyses

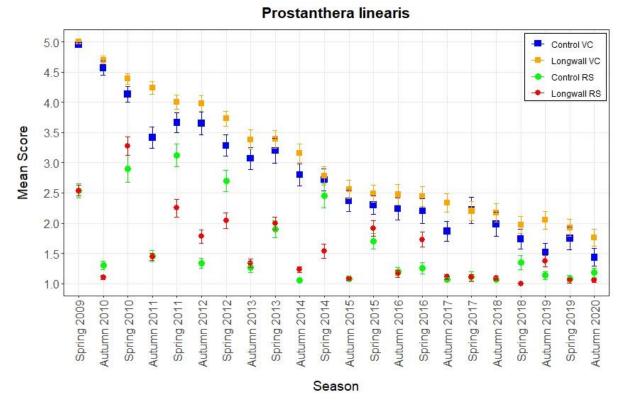


Figure 22: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Prostanthera linearis* (spring 2009 to autumn 2020)⁷.

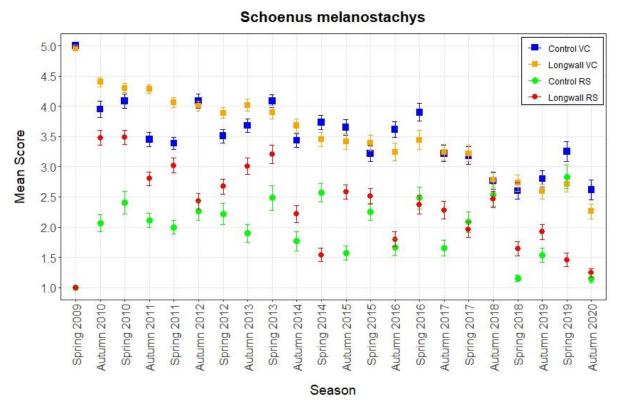


Figure 23: Mean Scores for Vegetation Condition (VC) and Reproductive Status (RS) for the indicator species, *Schoenus melanostachys* (spring 2009 to autumn 2020)⁷.

Table 12: Vegetation condition and reproductive status of indicator species at control (compromised) sites MRIP07 and MRIP08 for spring 2016 to autumn 2020.

						Vege	tatio	n Cond	dition														Rep	oroduo	ctive St	tatus							
Condition				MR	IP07							MRI	P08				Reproduct				MR	IP07							MR	IP08			
Score	Spr		Spr 7 2017		Spr 2018	Aut 2019			Spr 2016			Aut 2018		Aut 2019			-ive Rating	Spr 2016	Aut 2017	Spr 2017	Aut 2018	Spr 2018	Aut 2019	Spr 2019	Aut 2020	Spr 2016	Aut 2017	Spr 2017	Aut 2018	Spr 2018	Aut 2019	Spr 2019	Aut 2020
			•		•	Lom	atia i	nyrico	oides						,						'		Loi	natia	myrico	ides							
C5	13	10	14	8	6	8	6	7	5	6	7	5	4	5	2	2	RS5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
C4	3	3	5	2	6	3	6	3	8	7	10	7	11	11	11	8	RS4	-	-	-	-	-	-	-	1	-	-	-	1	-	-	-	-
С3	4	7	1	6	4	5	5	6	5	5	1	6	3	3	5	8	RS3	-	-	-	-	-	1	-	-	-	-	-	-	-	1	-	-
C2	-	-	-	2	1	2	1	1	1	1	1	1	1	-	1	1	RS2	1	-	-	2	-	5	-	3	-	-	-	1	-	-	-	-
C1	-	-	-	2	3	2	2	3	1	1	1	1	1	1	1	1	RS1	19	20	20	18	17 (3)	12 (2)	18 (2)	13 (3)	19 (1)	19 (1)	19 (1)	17 (1)	19 (1)	18 (1)	19 (1)	19 (1)
						Prost	tanth	era lin	nearis														Pro	stanth	nera lin	earis							
C5	10	5	7	10	-	7	6	6	3	1	5	5	3	2	1	2	RS5	2	-	-	-	-	-	-	-	3	-	-	-	-	-	-	-
C4	3	9	6	1	9	6	5	2	1	3	-	2	1	2	4	1	RS4	9	-	1	-	-	-	-	-	1	-	-	-	-	-	-	-
С3	4	2	3	4	6	1	3	5	2	3	2	-	1	1	-	2	RS3	1	-	-	-	-	7	1	-	1	-	-	-	-	1	2	1
C2	-	1	-	1	-	2	-	1	-	-	-	1	-	-	-	-	RS2	4	3	-	-	-	4	1	1	-	-	-	1	-	3	-	-
C1	3	3	4	4	5	4	6	6	4	3	3	2	4	5	5	5	RS1	1 (3)	14 (3) 15 (4)	16 (4)	15 (5)	5 (4)	12 (6)	13 (6)	1 (4)	7 (3)	7 (3)	7 (2)	5 (4)*	1 (5)	3 (5)	4 (5)
					S	choen	nus m	elano	stach	ys													Schoe	nus m	nelanos	stachy	s						
C5	6	6	1	1	-	1	2	-	5	2	3	2	2	1	2	4	RS5	4	-	1	-	-	-	-	-	-	1	1	-	-	-	-	-
C4	3	6	10	5	1	6	3	4	5	4	5	4	5	4	4	2	RS4	-	10	4	3	1	3	2	4	4	9	2	8	2	1	1	-
C3	7	6	6	10	12	8	8	9	5	10	5	8	8	8	6	5	RS3	1	1	4	6	1	2	2	-	1	5	3	1	4	1	1	2
C2	2	-	1	2	5	3	4	5	2	3	3	6	5	6	4	1	RS2	1	3	4	5	1	5	-	2	3	3	5	3	4	6	2	2
C1	2	2	2	2	2	2	3	2	3	1	3	-	-	1	4	8	RS1	12 (2)	4 (2)	5 (2)	4 (2)	15 (2)	8 (2)	13 (3)) 12 (2)	9 (3)	1 (1)	7 (2)	8	10	11 (1)	12 (4)	8 (8)

Numbers in brackets indicate plants which are dead and therefore have a default Reproductive Status of 1

^{*} data for one tagged individual not recorded during survey

Proportion of plants surviving

In autumn 2020, 234 of the tagged riparian indicator species were recorded in Condition 1, increasing from 189 individuals in spring 2019. From spring 2019 to autumn 2020, 52 tagged indicator species individuals declined to Condition 1 after being in a healthier condition in spring 2019, while seven individuals recorded in Condition 1 in spring 2019 were observed in an improved condition in autumn 2020.

The proportion of the total number of individuals originally tagged of each of the indicator species which have been recorded as dead within longwall sites, control sites and at control (compromised) sites (MRIP07 and MRIP08) across all monitoring seasons is presented in **Figure 24**, **Figure 25** and **Figure 26**. Up to spring 2016, sites MRIP07 and MRIP08 are included in the control site data. As a result of subsidence impacts prior to autumn 2017, these sites have been separated from the other control sites.

In spring 2019, the proportion of indicator species which were dead was greater at longwall sites than control sites for *Lomatia myricoides* and *Schoenus melanostachys*, as has been the case since autumn 2012 and spring 2013 respectively (**Figure 24** and **Figure 26**). The proportion of tagged *Prostanthera linearis* individuals recorded as Condition 1 in autumn 2020 was greater in control sites than longwall sites, a result which has been observed since autumn 2017 (**Figure 25**).

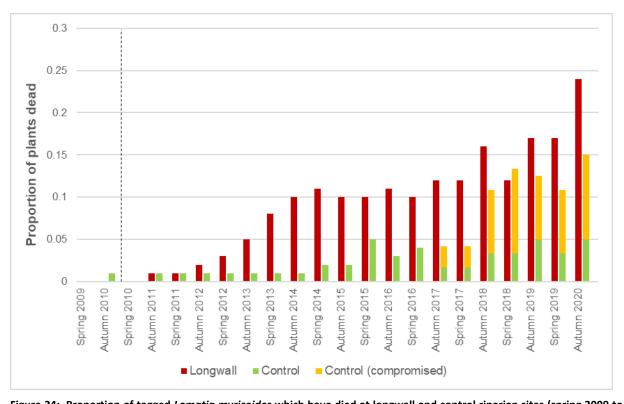


Figure 24: Proportion of tagged *Lomatia myricoides* which have died at longwall and control riparian sites (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post the mining of Longwalls 20-22.

For *Lomatia myricoides* the proportion of dead individuals in autumn 2020 increased from the previous spring 2019 season at longwall sites (0.17 to 0.24), with an increase also observed at control sites (0.03 to 0.05) (**Figure 24**). The highest mortality was recorded at MRIP02 and MRIP05, which together accounted for 75% of dead individuals of this species across all longwall sites. At longwall sites, the

proportion of dead individuals of *Lomatia myricoides* has remained relatively stable (between 0.10 and 0.17) since autumn 2014, with an increase (0.24) observed in the current autumn 2020 season. The proportion of dead *Lomatia myricoides* individuals has also remained relatively stable at control sites since spring 2015 (ranging between 0.017 and 0.05), with only a small increased observed in the current autumn 2020 survey (from 0.03 to 0.05).

For *Prostanthera linearis* the proportion of dead individuals in autumn 2020 showed a small increase at longwall sites (from 0.67 to 0.73) and at control sites (from 0.78 to 0.87), since spring 2019 (**Figure 25**). The number of dead individuals were evenly spread across all longwall sites, with each contributing between 21 - 23% apart from MRIP09, which only accounted for 12% of *Prostanthera linearis* mortality in longwall sites. Similarly, control sites each accounted for 29 - 37% of dead *Prostanthera linearis* individuals. Since spring 2010, the proportion of dead *Prostanthera linearis* individuals had gradually increased in both longwall and control sites.

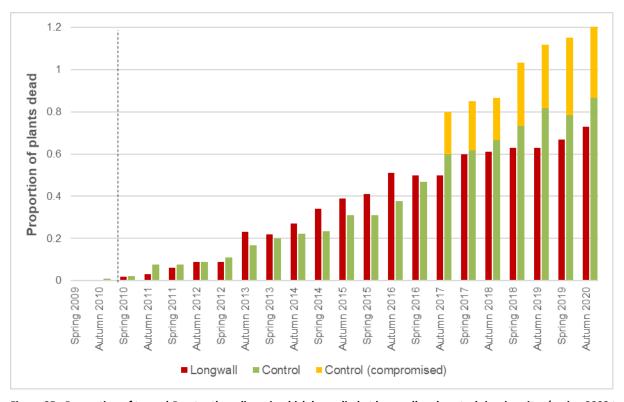


Figure 25: Proportion of tagged *Prostanthera linearis* which have died at longwall and control riparian sites (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post the mining of Longwalls 20-22.

For *Schoenus melanostachys*, the proportion of dead individuals in autumn 2020 increased at both longwall (from 0.28 to 0.39) and control sites (from 0.12 to 0.3), from spring 2019 (**Figure 26**). Overall, mortality was higher at longwall sites, with the greatest mortality recorded at MRIP02, which accounted for 49% of dead individuals of this species across all longwall sites. The proportion dead has generally been increasing consistently at both control and longwall sites since autumn 2017. This trend continues at both longwall and control sites in the current autumn 2020 survey.

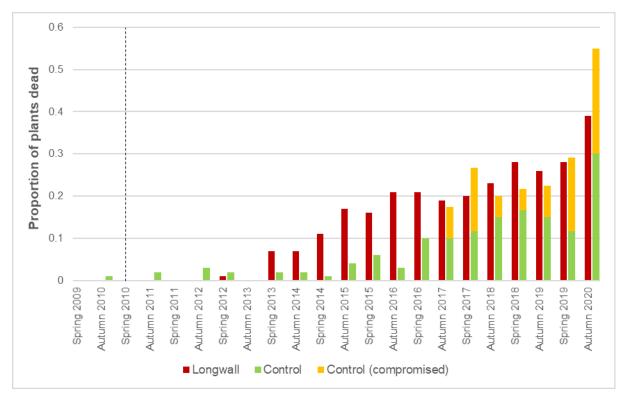


Figure 26: Proportion of tagged *Schoenus melanostachys* which have died at longwall and control riparian sites (spring 2009 to autumn 2020). Dashed line indicates change from baseline monitoring seasons to monitoring undertaken during and post the mining of Longwalls 20-22.

4.2.4 Assessment against performance indicators

In accordance with the Longwalls 305-307 Biodiversity Management Plan, the visual observations are used to assess the riparian vegetation performance indicator:

Impacts to riparian vegetation are expected to be localised and limited in extent, similar to the impacts previously experienced at Metropolitan Coal

The Riparian Vegetation Trigger Action Response Plan (TARP) from the Longwalls 305-307 Biodiversity Management Plan is provided in **Appendix C**.

Results of the visual observations, are described in **Section 4.2.1** above. A summary of the results in relation to the riparian vegetation TARP is provided in **Table 13**.

Within longwall site MRIP05 the vegetation dieback that has been observed since autumn 2018 had not extended in autumn 2020. No new areas of dieback were observed in autumn 2020 and regrowth was observed in the lower storey species.

As no riparian sites were identified as having dieback of vegetation greater than 50 cm from the stream during the autumn 2020 survey, the performance indicator 'Impacts to riparian vegetation are expected to be localised and limited in extent, similar to the impacts previously experienced at Metropolitan Coal' has not been exceeded in autumn 2020.

Table 13: Summary of Riparian Vegetation monitoring against Trigger Action Response Plan.

Performance Indicator	Baseline		Significance Levels/ Triggers ²	Autumn 2020 Monitoring Results	Action/Response	Comments
Impacts to riparian vegetation are expected to be localised and limited in extent, similar to the impacts previously experienced at Metropolitan Coal	No dieback of riparian vegetation prior to the commencement of Longwall 20 as a result of mining. Dieback of riparian vegetation greater than 50 cm from the stream identified at site MRIPO2 on the Waratah	Level 1	No dieback of riparian vegetation greater than 50 cm from the stream as a result of mine subsidence.	Sites MRIP01, MRIP03, MRIP04, MRIP06, MRIP07, MRIP08 and MRIP10	Continue monitoring. Six monthly reporting. For sites that were previously observed with riparian vegetation dieback greater than 50 cm record the reasons for the reduction in dieback (e.g. vegetation recovery, new stream bank resulting from erosion, other).	None of the sites have previously been observed with riparian vegetation dieback greater than 50 cm from the stream.
	MRIP02 on the Waratah Rivulet and between sites MRIP05 and MRIP09 on the Eastern Tributary during the mining of Longwalls 20- 27.	Level 2	Vegetation monitoring: - does not identify an increase in the extent of vegetation dieback compared to that observed at site MRIP02 on the Waratah Rivulet and between sites MRIP05 and MRIP09 on the Eastern Tributary; and - does not identify vegetation dieback greater than 50 cm from the stream at sites MRIP01, MRIP03, MRIP04, MRIP06, MRIP07, MRIP08 or MRIP10, as a result of mine subsidence.	Sites MRIP02, MRIP05 and MRIP09	Consider recent stream features mapping results and pool water level monitoring data. Consider extent of erosion associated with areas of vegetation dieback and whether management measures are required. Six monthly reporting.	Stream conditions at sites MRIP02, MRIP05 and MRIP09 are described in Section 3.2.1 (along with previous observations at these sites). Scouring of the stream bank and erosion resulting from high water flows following heavy rain events are described in Section 3.2.1. The extent of dieback at sites previously observed with riparian vegetation dieback (MRIP02, MRIP05 and MRIP09) had not increased in the current survey and vegetation recovery was apparent.
		Level 3	Vegetation monitoring: - identifies an increase in the extent of vegetation dieback compared to that observed at site MRIP02 on the Waratah Rivulet and between sites MRIP05 and MRIP09 on the Eastern Tributary; and - identifies vegetation dieback greater than 50 cm from the stream at sites MRIP01, MRIP03, MRIP04, MRIP06, MRIP07, MRIP08, MRIP10, MRIP11 or MRIP12, as a result of mine subsidence.	No sites.	Consider recent stream features mapping results and pool water level monitoring data. Initiate assessment against the performance measure ¹ . Consider the need for management measures, in accordance with Sections 8 and 9.	-

¹ Threatened species, populations and ecological communities include those listed under the BC Act, EPBC Act or Fisheries Management Act at the time of Project Approval (i.e. the lists current as at 22 June 2009).

² Note: some sites listed are applicable to, and assessed in the Longwalls 23-27 Autumn 2017 Vegetation Monitoring Report.

4.3 Significant species

Six species of conservation significance were recorded during autumn 2020 (**Appendix D**), all of which have been recorded previously (**Table 14**). Generally, the significant species observed during the transect/quadrat monitoring and visual inspections in autumn 2020 were in healthy condition (Condition 5) at both longwall and control sites. Minor dieback (Condition 4) was recorded for isolated individuals of *Pultenaea aristata* across a number of longwall sites (**Table 14**) however, this represents an overall improvement in condition for this species, compared to previous seasons.

Details regarding the condition of monitored populations of *Pultenaea aristata* are provided in **Section 4.1.3**.

One species of conservation significance which has previously been recorded, *Acacia baueri* subsp. *aspera*, was not recorded in the current autumn 2020 survey. This species is known from one individual within the control site Swamp 111a. In the autumn 2018 survey this individual was recorded with some dead branches (Condition 3) and has not be recorded from spring 2018 onwards.

Hibbertia nitida was recorded in good condition (Condition 5) in autumn 2020 with the exception of riparian site MRIP01 where it was recorded with some dead branches (Condition 3), which represents an improvement in the overall condition of this species relative to previous seasons. Hibbertia nitida occurs more frequently within longwall riparian sites and is usually found away from the direct top of bank zone. As such, the dieback recorded in previous seasons is not considered to be related to the mining of Longwalls 20-22 and is more likely a result of the impacts of flooding which produce high velocity water flows carrying woody debris.

Table 14: Species of conservation significance recorded across vegetation monitoring sites, autumn 2020.

	Conserv	ation si	gnificance							
Species	EPBC Act	BC Act	RoTAP Code	Location and condition						
Darwinia diminuta	-	_	2RCi	Swamps 16, 17, 18, 24, 111a and 125 – Recorded in good condition within all swamps in autumn 2020, with the exception of Swamp 24 where it was recorded with some dead branches (Condition 3).						
Eucalyptus luehmanniana	_	_	2RCa	Swamp 25 – Recorded in good condition in autumn 2020.						
Hibbertia nitida	_	_	2RC-	MRIP01, MRIP02, MRIP03, MRIP04, MRIP05, MRIP06, MRIP07 and MRIP08 – Recorded in good condition (Condition 5) within all riparian quadrats in autumn 2020 with the exception of MRIP01 where it was recorded with some dead branches (Condition 3).						
Lomandra fluviatilis	_	-	3RCa	MRIP01, MRIP04, MRIP07 and MRIP08 – Recorded in good condition within all riparian quadrats in autumn 2020.						
Pultenaea aristata	V	V	2V	Swamps 16, 17, 18, 25, 101 and 111a – Recorded in good condition within all sites in autumn 2020, with isolated individuals recorded with minor dieback (Condition 4 – Swamps 16, 17 and 18). See Section 4.1.3 for details regarding condition of monitored populations of this species.						
Tetratheca neglecta	_	_	3RC-	Swamps 16 and 17 – Recorded in good condition in all swamps in autumn 2020.						

Legend

- BC Act (NSW Biodiversity Conservation Act 2016): V = Vulnerable
- EPBC Act (Commonwealth Environment Protection & Biodiversity Conservation Act 1999): V = Vulnerable
- RoTAP (Rare or Threatened Australian Plants) Code:
 - 3 = Geographic range in Australia more than 100 km
 - 2 = Geographic range in Australia less than 100 km
 - R = Rare in Australia but does not have an identifiable threat
 - C = Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
 - V = Vulnerable
 - a = 1000 plants or more are known to occur within a conservation reserve(s)
 - i = less than 1000 plants are known to occur within a conservation reserve(s)
 - = reserved population size is not accurately known

4.4 Introduced species

No weed species were recorded within any of the longwall upland swamps. Two weed species, namely *Conyza* sp. (Fleabane) and *Solanum nigrum* (Black-berry Nightshade), were recorded within control site Dahlia Swamp, where weeds have previously been recorded in low densities.

Six introduced species were observed in riparian monitoring sites: *Aster subulatus* (Wild Aster) (MRIP01), *Conyza sp.* (Fleabane) (MRIP01), *Cyperus gracilis* (Slender Flat-sedge) (MRIP01), *Gamochaeta* sp. (Cudweed) (MRIP01), *Hypochaeris radicata* (Catsear) (MRIP01 and MRIP02) and *Paspalum dilatatum* (Paspalum) (MRIP01). No introduced aquatic species have been recorded in streams adjacent to the riparian monitoring sites.

Including the observations in autumn 2020, introduced species have been recorded in very low abundance in individual seasons, at all riparian monitoring sites except MRIP07. In addition to those mentioned above, weed species recorded throughout the monitoring period include: *Ageratina adenophora* (Crofton Weed), *Cirsium vulgare* (Spear Thistle), *Cyperus eragrostis* (Umbrella Sedge), *Cyperus* sp., *Digitaria* sp., *Facelis retusa* (Annual Trampweed), *Gamochaeta spicata* and *Sonchus oleraceus* (Sowthistle). The low occurrence of introduced species within the riparian monitoring sites is attributed to downstream dispersal from weed sources located in the upper catchment at Darkes Forest, along the Princes Highway and from Flat Rock Crossing where vehicle access may also promote weed spread.

Beyond the monitoring sites, weeds have been observed in low densities at Flat Rock Crossing, the area between MRIP03 and MRIP04, as well as scattered occurrences along verges of the main access roads (e.g. Fire trail 9H, Fire trail 9, Fire trail 9J). These include *Ageratina adenophora*, *Andropogon virginicus*, *Conyza* sp., *Gamochaeta* sp. (Cudweeds) and *Senecio madagascariensis*. Weed control works have been conducted along portions of Fire Trails 9H and 9J targeting *Ageratina adenophora* and *Andropogon virginicus*. Control of these species within areas upslope of riparian vegetation is likely to reduce the occurrences of these species within the riparian zone.

5. Conclusions

5.1 Upland swamp vegetation monitoring

The key findings of the Longwalls 20–22 autumn 2020 upland swamp vegetation survey (since the previous spring 2019 survey) can be summarised as follows:

- The declining trend in the condition of longwall swamp vegetation previously recorded by vegetation monitoring in spring 2017 and autumn 2018 for Swamps 16, 17, 18, 24 and 25 has stabilised for the fourth survey season and recovery, in the form of new growth on many of the impacted species, was apparent in autumn 2020. Swamps 16, 17, 18, 24 and 25 have therefore remained at 'significance Level 1' in accordance with the upland swamp vegetation monitoring TARP.
- Dieback of *Gleichenia* spp. across Swamp 20 has ceased and signs of recovery (regrowth) were observed. Swamp 20 has therefore returned to 'significance Level 1' in accordance with the upland swamp vegetation monitoring TARP.

Given the above, the upland swamp vegetation performance indicator, the vegetation in upland swamps is not expected to experience changes significantly different to changes in control swamps, has not been exceeded in autumn 2020.

5.2 Riparian vegetation monitoring

The key findings of the Longwalls 20–22 autumn 2020 riparian vegetation survey (since the previous spring 2019 survey) can be summarised as follows:

- Dieback of riparian vegetation greater than 50 cm from the stream as a result of mine subsidence at sites MRIP01, MRIP03, MRIP04, MRIP06, MRIP07, MRIP08 and MRIP10 has not been observed to date. These sites remain at 'significance Level 1' in accordance with the riparian vegetation monitoring TARP.
- Areas previously observed with riparian vegetation dieback at sites MRIP02, MRIP05 and MRIP09 were not observed with the same extent of dieback in the current survey and vegetation recovery was apparent. These sites remain at 'significance Level 2' in accordance with the riparian vegetation monitoring TARP.

Given the above, the riparian vegetation performance indicator, *impacts to riparian vegetation are* expected to be localised and limited in extent, similar to the impacts previously experienced at Metropolitan Coal, has not been exceeded in autumn 2020.

References

Bangalay Botanical Surveys. (2008). *Metropolitan Coal Project Flora Survey - Proposed Longwall Mining Area*. Report prepared for Helensburgh Coal Pty Ltd.

Bishop, T. (2000). *Field Guide to the Orchids of New South Wales and Victoria*. Sydney: University of New South Wales Press.

Brooker, M. H., & Kleinig, D. A. (2006). Field Guide to Eucalypts 3rd Edition. Melbourne: Blooming Books.

Eco Logical Australia. (2010a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22, Baseline Data* – *Spring 2008, Autumn 2009, Spring 2009 and Autumn 2010.* Report prepared for Metropolitan Coal.

Eco Logical Australia. (2010b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2010*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2011a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2011*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2011b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2011*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2012a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2012*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2012b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2012*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2013a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2013*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2013b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2013*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2014a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2014*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2014b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2014*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2015a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2015.* Report prepared for Metropolitan Coal.

Eco Logical Australia. (2015b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2015*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2016a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2016*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2016b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2016*. Report prepared for Metropolitan Coal.

Eco Logical Australia. (2018a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2017*. Report Prepared for Metropolitan Coal.

Eco Logical Australia. (2018b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2017.* Report Prepared for Metropolitan Coal.

Eco Logical Australia. (2019a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2018*. Report Prepared for Metropolitan Coal.

Eco Logical Australia. (2019b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2018*. Report Prepared for Metropolitan Coal.

Eco Logical Australia. (2020a). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2019*. Prepared for Metropolitan Coal Pty Ltd.

Eco Logical Australia. (2020b). *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Spring 2019*. Prepared for Metropolitan Coal Pty Ltd.

Fairley, A., & Moore, P. (2010). *Native Plants of the Sydney District - An Identification Guide*. 3rd Edition. Crows Nest NSW: Jacana Books, Allen & Unwin.

Harden, G. (1992-2002). Flora of New South Wales Vols 1, 2, 3 and 4. Kensington, NSW: NSW University Press.

Jacobs, S. W., Whalley, R. D., & Wheeler, D. J. (2008). *Grasses of New South Wales, 4th edition*. Armidale: University of New England Press.

Jones, D. L. (2006). A Complete Guide to Orchids of Australia. Australia: New Holland Press.

Keith, D. A., & Myerscough, P. J. (1993). Floristics and soils relations of upland swamp vegetation near Sydney. *Australian Journal of Ecology*, 325-344.

Klaphake, V. (2004). Key to the commoner species of sedges and rushes of the Sydney and the Blue Mountains. Van Klaphake.

Metropolitan Coal. (2014). *Metropolitan Coal Longwalls 20-22 Biodiversity Management Plan*. Metropolitan Coal Pty Ltd.

Metropolitan Coal. (2015). *Metropolitan Coal Longwalls 23-27 Biodiversity Management Plan*. Metropolitan Coal Pty Ltd.

Metropolitan Coal. (2018). *Metropolitan Coal Longwalls 301-303 Biodiversity Management Plan*. Metropolitan Coal Pty Ltd.

Metropolitan Coal. (2019a). *Metropolitan Coal Longwall 304 Biodiversity Management Plan*. Metropolitan Coal Pty Ltd.

Metropolitan Coal. (2019b). *Metropolitan Coal Longwalls 305-307 Biodiversity Management Plan*. Metropolitan Coal Pty Ltd.

Mine Subsidence Engineering Consultants (MSEC) (2016). *Metropolitan Mine – Longwalls 301 to 303 Subsidence Predictions and Impact Assessments for the Natural and Built Features in Support of the Extraction Plan* (MSEC Report MSEC846).

National Parks and Wildlife Services (NPWS) (2003). *Native Vegetation of the Woronora, O'Hares and Metropolitan Catchments*. Sydney: NSW National Parks and Wildlife Service.

Pellow, B. J., Henwood, M. J., & Carolin, R. C. (2009). *Flora of the Sydney Region*. Australia: Sydney University Press.

Robinson, L. (2003). Field guide to the native plants of Sydney 3rd Edition. East Roseville: Kangaroo Press.

Royal Botanic Gardens and Domain Trust, Sydney. (2019). PlantNET – The NSW Plant Information Network System of the Royal Botanic Gardens and Domain Trust. Retrieved from http://plantnet.rbgsyd.nsw.gov.au

© ECO LOGICAL AUSTRALIA PTY LTD

70





Metropolitan Coal Vegetation Monitoring

Longwalls 20-22 – Autumn 2020 Appendices

Prepared for

Metropolitan Coal

MARCH 2021





DOCUMENT TRACKING

Project Name	Metropolitan Coal Vegetation Monitoring Longwalls 20-22 Autumn 2020
Project Number	20SUT-15074
Project Manager	Bronwyn Callaghan
Prepared by	Bronwyn Callaghan, Lauren Perkins, Suzanne Eacott
Reviewed by	Beth Medway
Approved by	Beth Medway
Status	Final
Version Number	V2
Last saved on	16 March 2021
Cover photo	Longwalls 20-22 Vegetation Monitoring Area – Brian Towle and Elizabeth Norris

This report should be cited as 'Eco Logical Australia, 2021. *Metropolitan Coal Vegetation Monitoring, Longwalls 20-22 – Autumn 2020 Appendices*. Prepared for Metropolitan Coal Pty Ltd.'

ACKNOWLEDGEMENTS

This document has been prepared by Eco Logical Australia Pty Ltd with support from Metropolitan Coal Pty Ltd and Resource Strategies.

Disclaimer

This document may only be used for the purpose for which it was commissioned and in accordance with the contract between Eco Logical Australia Pty Ltd and Metropolitan Coal Pty Ltd. The scope of services was defined in consultation with Metropolitan Coal Pty Ltd, by time and budgetary constraints imposed by the client, and the availability of reports and other data on the subject area. Changes to available information, legislation and schedules are made on an ongoing basis and readers should obtain up to date information. Eco Logical Australia Pty Ltd accepts no liability or responsibility whatsoever for or in respect of any use of or reliance upon this report and its supporting material by any third party. Information provided is not intended to be a substitute for site specific assessment or legal advice in relation to any matter. Unauthorised use of this report in any form is prohibited.

Template 2.8.1

Contents

Appendix A: Datasheets	1
Appendix B: Site details	8
Appendix C: Upland swamp and riparian vegetation performance indicators – Tathe Longwalls 305 – 307 Biodiversity Management Plan	
Appendix D: Species lists – Upland swamp monitoring sites and riparian monitoring	ng sites15
Appendix E: Vegetation monitoring raw data – Valley side swamp monitoring site	s23
E1: Vegetation structure, dominant species and estimated cover for each stro	•
swamps	
E2: Estimated cover/abundance data – Valley side swamps	
E3 : Vegetation condition – Valley side swamps E4 : Indicator species data – Valley side swamps	
Appendix F: Vegetation monitoring raw data – Tea tree thicket swamp monitoring $F1$: Vegetation structure, dominant species and estimated cover for each stratum	n – Tea tree thicket
swamps	
F2: Estimated cover/abundance data – Tea tree thicket swamps	
F3: Vegetation condition – Tea tree thicket swamps	
F4: Indicator species data – Tea tree thicket swamps	109
Appendix G: Riparian vegetation monitoring raw data	116
G1: Vegetation structure, dominant species and estimated cover for each stratu	ım — Riparian sites
	117
G2 : Estimated cover/abundance data — Riparian sites	
G3 : Vegetation condition – Riparian sites	
G4: Indicator species data – Riparian sites	127

Appendix A: Datasheets

	Floristic Vege			
)ate:	Record	der:	Site No:	= 31 - 25270.2
Camera No	:			
hoto No:	0m F:			
	20m B:		20m F:	(3)
	25m B:		25m F:	
	50m B:			
ocation: _				
Quadrat Siz	e (if not 20 x 20 m	1):	82	
				2
		% Cover	Dominant Species	
Stratum	Height (m)	% Cover		
Stratum	Height (m)	% Cover		
Stratum	Height (m)	% Cover		
Stratum	Height (m)	% Cover		
Stratum	Height (m)	% Cover		
Stratum	Height (m)	% Cover		
	9			
	ormation Class: _			
tructural Fo	ormation Class: _			

Floristic Composition

Date:

Site No:

No.	Species	C/A	Cond*	Notes	No.	Species	C/A	Cond*	Notes
1					31				
2		0			32				
3					33				
4					34				
5		N.	100		35				
6		3	(A)		36				
7					37				
8		XI.	100		38				
9		3	10		39				
10					40				
11					41		5		
12		8	3		42				
13					43				
14					44				
15		8	3		45				
16					46				
17					47				
18		9	8		48		8 9		
19			100		49				
20					50				
21		8	36 CV		51				į
22					52				
23					53				
24		8	34 (i)		54				
25					55				
26					56				
27		9			57				2
28					58				
29					59				
30		N .	100		60				

Condition

1 severe damage/dieback

2 many dead stems

3 some dead branches

4 minor damage

5 healthy

Cover Abundance Scale (Modified Braun Blanquet)

1 = < 5% of site and rare (< 3 individuals)

2 = < 5% of site and uncommon (> 3 sparsely scattered)

3 = < 5% of site and common - consistent throughout plot

4 = cover of 5%-20%

5 = cover of 20% - 50% of site

6 = cover of 50% - 75% of site

7 = cover of 75% - 100% of site

o-h - overhanging; B - Buds; FL - Flowers; FR - Fruit

			logical	No.	Species	C/A	Cond*	Notes
oristic Ve	getation Sur	vey	III VE TO ANTITALIA	3				
				2				
ate:	Record	er:	Site No:	3				
amera No:	2:			4				
	at Photo No:			5				
				6				
Transe	ct Photo No (wh	ere applicabl	e):	7				
				8				
cation:				P				
undrat Size	(if not 20 x 20 m	1.		10	5			
				-11				
e History	1000		How determined	12				
isturbance (circle): ero	osion log	ging litter weeds feral animals	13				
				14				
egetation St	ructure: (Walker	& Hopkins, 19	983)	15	15			
Stratum		% Cover	Dominant Species	16				
				17				
	-		-	18				
				19				
				20				
				21				
				22				
	V 1000000000000000			23	St.			
ructural For	mation Class: _			24				
omments:				25				
				26	1.			
				27				
				28				
			-	29				
				30				
				2 = mar 3 = som	on ere damage/dieback ny dead stems ne dead branches or damage:	1 = 2 = 3 =	< 5% of site < 5% of site	nce Scale (Modified Sraun Blanquet) and tore (< 3 individuals) and uncommon (> 3 sparsely scattered) and common – consistent throughout plot

5

Species:	Lomatia my	ricoides	Site	No:	MRIP01		Tag Colour: Orange	logical	
Date:			Rec	order:			AUSTRAL		
Tag No.	Easting	Northing	Condition	Height	Rating - Flowers	Rating - Fruits	Notes		
G1									
G2									
G3		8							
G4									
G5			*			63			
G6			*			63			
G7		3	4	9		8			
G8/G201		3	5	8 :		Si .			
G9	3.	3.15	a			(A)			
G10		3	a						
G11		,							
G12									
G13									
G14									
G15									
G16									
G17									
G18									
G19						20			
G20									
Reproductive	Ratings 1 – Nil 2 – Sp. 3 – Lov 4 – Mo 5 – Hig	v under 25' derate 25% – 75	al flowers only % of potential % of potential 0 % of potential	C	ondition	1 severe dama 2 many dead : 3 some dead ! 4 minor dama 5 healthy	stems branches		

Visual Inspections for subsidence impacts - Swamps - Autumn 2020 Site No: Swamp 101 Recorder: Date: Potential Subsidence Impacts Comments Cracking of exposed bedrock or No Yes - extent and location: sediments Any weeds No Yes - species and number: Large areas of unusual senescing No Yes - extent and location: vegetation Any species with dieback observed incl. number individuals impacted: (F -few, O - occasional, C -common), and distribution: (I - isolated, S - scattered, W - widespread). Amount of seepage - incl. location Swamp surface sediments Damp/moist Dry Wet Saturated - standing water Changes in water colour or location etc. Areas of increased erosion - incl. severity, type & location (i.e. minor gully erosion in table drain) Other comments (Recent rainfall events, anthropogenic impacts, any other comments/observations) Eco Logical Australia

Site no: Swamp 101 Camera:

Photo Points	Photo No(s).	Waypoints	Comments
PP1 Top end by track junction	50° 85°	Correct on GPS	
PP2 E. haemastoma near top	20° 60° 75°	Correct on GPS	
PP3 Along track at end of T1(near) (mapping and GPS a bit off)	40° 280° 345°	308707 6216567	
PP4 Pinch point, E haemastoma	35° 80° 90°	308761 6216607	
PP5 Lower swamp, north side, middle Rock step next to track	130° 250° 195°	308808 6216628	
PP6 End of T3	170° 235° 260° 200°	308735 6216621	
PP7 Lower swamp, E. haemastoma below PP5	80° 115° 150° 230° 210°	308818 6216628	

Eco Logical Australia

Appendix B: Site details

Longwalls 20-22 – Vegetation Monitoring Sites

Site	Monitoring techniques	Control / LW	Location	Easting, Northing	Vegetation	Site marker	Transect orientation
			SWAMPS – Valley Side				
S16	Visual observations; Transects/quadrats	LW21	South of Fire Road 9C, left branch	309578 6214935	Sedgeland-Heath Complex/ Sandstone Heath Woodland	At start	T1 – 75° T2 – 350° T3 – 345°
S17	Visual observations; Transects/quadrats	LW21	North of Fire Road 9C, left branch	309619 6214932	Sedgeland-Heath Complex/ Sandstone Heath Woodland	At start	T1 – 350° T2 – 8° T3 – 345°
S18	Visual observations; Transects/quadrats; Population monitoring of indicator species	LW21	North of Fire Road 9C, left branch	309737 6214891	Sedgeland-Heath Complex	At start	T1 – 340° T2 – Due north T3 – 50°
S24	Visual observations; Transects/quadrats; Population monitoring of indicator species	LW21-22	East of Fire Road 9G, just south of Fire Road 9J	311339 6214013	Sedgeland-Heath Complex	At start	T1 – Due north T2 – 20° T3 – 30°
S25	Visual observations; Transects/quadrats; Population monitoring of indicator species	LW21-22	East of Fire Road 9G, just south of Fire Road 9J	311169 6214010	Sedgeland-Heath Complex	At start	T1 – 70° T2 – 60° T3 – 60°
S101	Visual observations; Transects/quadrats; Population monitoring of indicator species	Control	East of Fire Road 9	308652 6216578	Sedgeland-Heath Complex	At start	T1 – Due east T2 – 60° T3 – 50°
S111a	Visual observations; Transects/quadrats; Population monitoring of indicator species	Control	East of Fire Road 9	308887 6217040	Sedgeland-Heath Complex	At start	T1 – 60° T2 – 90° T3 – 90°
S125	Visual observations; Transects/quadrats; Population monitoring of indicator species	Control	North-west of Fire Road 9D	309717 6218864	Sedgeland-Heath Complex	At start	T1 – Due west T2 – 280° T3 – 300°
			SWAMPS – TEA TREE THICKE	T			
S20	Visual observations; Transects/quadrats; Population monitoring of indicator species	LW21	West of Fire Road 9G and south of Fire Road 9J	310444 6214383	Tea Tree Thicket	At start	T1 – 250° T2 – 225° T3 – 225°
Woronora River 1	Visual observations; Transects/quadrats; Population monitoring of indicator species	Control	Darkes Forest Road, upstream from Woronora River Crossing	306406 6214962	Tea Tree Thicket	At start	T1 – 90°

Longwalls 20-22 – Vegetation Monitoring Sites

Site	Monitoring techniques	Control / LW	Location	Easting, Northing	Vegetation	Site marker	Transect orientation
Woronora River south arm	Visual observations; Transects/quadrats; Population monitoring of indicator species	Control	North of walking track off Darkes Forest Road, north of Fire Road 10H	306414 6213953	Tea Tree Thicket	At start	T1 – 60°
Dahlia Swamp	Visual observations; Transects/quadrats; Population monitoring of indicator species	Control	North of Fire Road 10H, off Darkes Forest Road	306149 6212874	Tea Tree Thicket	At start	T1 – 60°
			RIPARIAN SITES				
MRIP01	Visual observations; Quadrat data; and Population monitoring of indicator species	LW20	Waratah Rivulet, west bank, adj. to monitoring box	309835 6214400	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP02	Visual observations; Quadrat data; and Population monitoring of indicator species	LW21	Waratah Rivulet, west bank	301017 6214635	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP03	Visual observations; Quadrat data; and Population monitoring of indicator species	Control	Waratah Rivulet, east bank	310428 6215311	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP04	Visual observations; Quadrat data; and Population monitoring of indicator species	Control	Waratah Rivulet, east bank	311049 6215492	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP05	Visual observations; Quadrat data; and Population monitoring of indicator species	LW21	Creek east of Fire Road 9G, access via ford on Fire Road 9J, east bank	311473 6213759	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP06	Visual observations; Quadrat data; and Population monitoring of indicator species	LW22	Creek east of Fire Road 9G, access via ford on Fire Road 9J, east bank	311587 6213939	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP07	Visual observations; Quadrat data; and Population monitoring of indicator species	Former Control	Creek east of Fire Road 9G, access via end of Fire Trail 9G, west bank	312144 6215259	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP08	Visual observations; Quadrat data; and Population monitoring of indicator species	Former Control	Creek east of Fire Road 9G, access via end of Fire Road 9G, west bank	312161 6215499	Sandstone Riparian Scrub	At start	Downstream from peg
MRIP09	Visual observations; and Population monitoring of indicator species	LW20	Eastern Tributary, upstream of site MRIP05	311424 6213600	Sandstone Riparian Scrub	-	Traverses

Longwalls 20-22 – Vegetation Monitoring Sites

Site	Monitoring techniques	Control / LW	Location	Easting, Northing	Vegetation	Site marker	Transect orientation
MRIP10	Visual observations; and Population monitoring of indicator species	Control	Waratah Rivulet, downstream from site MRIP04	311150 6215600	Sandstone Riparian Scrub	-	Traverses

Appendix C: Upland swamp and riparian vegetation performance indicators — Tables 16 and 18 of the Longwalls 305 — 307 Biodiversity Management Plan

Table 16
Trigger Action Response Plan – Upland Swamp Vegetation Monitoring

Performance Measure	Performance Indicator	Monitoring Sites	Parameters	Frequency/ Sample Size	Analysis Methodology	Error Types	Error Types Baseline		Significance Levels/ Triggers	Action/Response
Measure Negligible impact on Threatened Species, Populations, or Ecological Communities	Indicator The vegetation in upland swamps is not expected to experience changes significantly different to vegetation in control swamps	Swamps 16, 17, 18, 20, 24 and 25 overlying or adjacent to Longwalls (LW) 20-22. Swamps 19, 28, 30, 31, 32, 33, 34, 35, 36 and 94 overlying or adjacent to LW23-27. Swamps 40, 41, 47, 48, 49, 50, 53 and 58 overlying or adjacent to LW301-303 and Longwall 304. Swamp 72 within the 35' angle of draw and/or predicted 20 mm subsidence contour of LW305-307. Control Swamps 101, 111a, 125, 135, 136, 137a, 137b, 138, Bee Creek Swamp.	Visual inspections ¹ . Transect/ quadrat data ² . Population monitoring of indicator species ³ .		Visual assessment of changes in the condition of the swamps over time. Qualitative analysis of collected vegetation data. Statistical analysis of species diversity (e.g. ANOVA ⁴ or cluster analysis of proportions of	Subjective nature of visual observations and qualitative analysis. Statistical significance levels. Significant = P < 0.05	LW20-22 swamps, as detailed in the LW20-22 vegetation monitoring report for the spring 2008 to autumn 2010 surveys ⁶ . LW23-27 swamps, as detailed in the LW23-27 vegetation monitoring report for the spring 2010 to spring 2013 surveys ⁷ . LW301-303 swamps, as detailed in the	Level 1 Level 2 Level 3	Triggers Data analysis indicates: - there is not a declining trend in the condition of longwall swamp vegetation; and - there are no significant changes in vegetation between the mined and control swamps. Data analysis indicates: - there is a declining trend in the condition of longwall swamp vegetation over time, however a similar trend is occurring in control swamp vegetation; or - there are significant differences in vegetation between the mined and control swamps, however, the data indicates longwall swamp vegetation is consistent with the baseline monitoring results. Data analysis indicates: - there is a declining trend in the condition of	Continue monitoring. Six monthly reporting. Consider swamp groundwater monitoring data. Six monthly reporting. Consider swamp groundwater monitoring data.
		Woronora River 1, Woronora River south arm and Dahlia Swamp.			plants surviving, and differences in health and reproduction ratings over time and relative to control swamps.		LW301-303 vegetation monitoring report for the spring 2015 to autumn 2017 surveys ⁸ . • LW304 Swamps 48 and 50, spring 2015 to autumn 2019 surveys. Other swamps visually inspected as detailed in the LW301-303 vegetation monitoring reports. • Visual monitoring in LW305-307 Swamp 72 to commence in spring 2019.		longwall swamp vegetation over time that is not occurring in control swamp vegetation; or - there are significant differences in vegetation between the mined and control swamps, and the data indicates longwall swamp vegetation is not consistent with the baseline monitoring results.	Initiate assessment against the performance measure ⁹ . Consider the need for management measures, in accordance with Sections 8 and

¹ Visual inspections will be conducted in all swamps listed under 'Monitoring Sites' in this table, as well as Swamp 46, Swamp 51/52 and Swamps 69, 70, 71a and 71b which were subject to WaterNSW hazard reduction burns. Not subject to TARP.

Transect/quadrat monitoring will continue to be conducted in Swamps 16, 17, 18, 20, 24 and 25 overlying Longwalls 20-22, Swamps 28, 30, 33, 35 and 94 overlying or adjacent to Longwalls 23-27, Swamps 40, 41, 46, 51/52 and 53 over Longwalls 301-303, Swamps 48 and 50 over or adjacent to Longwall 304 and in control swamps. Transect/quadrat monitoring will be conducted in Swamp 71a within the 35° angle of draw and/or predicted 20 mm subsidence contour of Longwalls 305-307. Swamp 71a, subject to hazard reduction burns is not subject to TARP.

³ Indicator species monitoring will continue to be conducted in Swamps 18, 20, 24 and 25 overlying Longwalls 20-22, Swamps 19, 28, 30, 33, 35 and 94 overlying or adjacent to Longwalls 23-27, Swamps 40 and 53 over Longwalls 301-303, and in control swamps.

In general, the purpose of ANOVA is to test for significant differences between means.

⁵ The term cluster analysis encompasses a number of different algorithms and methods for grouping objects of similar kind into respective categories.

⁶ Eco Logical Australia (2010) Metropolitan Coal Vegetation Monitoring Longwalls 20-22 - Baseline Data. Report prepared for Metropolitan Coal.

Eco Logical Australia (2013) Metropolitan Coal Vegetation Monitoring Longwalls 23-27 - Baseline data. Report prepared for Metropolitan Coal.

⁸ Eco Logical Australia (2018) Metropolitan Coal Vegetation Monitoring Longwalls 301-303 - Baseline data. Report prepared for Metropolitan Coal.

⁹ Threatened species, populations and ecological communities include those listed under the BC Act, EPBC Act or Fisheries Management Act at the time of Project Approval (i.e. the lists current as at 22 June 2009).

Table 18
Trigger Action Response Plan – Riparian Vegetation Monitoring

Performance Measure	Performance Indicator	Monitoring Sites	Parameters	Frequency/ Sample Size	Analysis Methodology	Error Types	Baseline	Significance Levels/ Triggers		Action/Response
Negligible impact on Threatened	Impacts to riparian vegetation are expected to be	Locations adjacent to riparian vegetation monitoring sites (MRIP01 to MRIP12) and areas	The extent of vegetation subject to vegetation	Biannually, in autumn and	Assessment of the extent of	Subjective nature of	No dieback of riparian vegetation prior to the	Level 1	No dieback of riparian vegetation as a result of mine subsidence.	Continue monitoring. Six monthly reporting.
Species, Populations, or Ecological Communities	localised and limited in extent, similar to the impacts previously experienced at Metropolitan Coal	(minro to minro 12) and aleast traversed whilst accessing the monitoring sites: • sites MRIP01, MRIP02, MRIP05 and MRIP05 overlying Longwalls (LW) 20-22; • sites MRIP11 and MRIP12 overlying LW23-27; • sites MRIP03, MRIP04 and MRIP10 downstream of LW23A; and	dieback.		Level 2	Vegetation monitoring: - does not identify an increase in the extent of vegetation dieback at site MRIP02 on the Waratah Rivulet and between sites MRIP05 and MRIP09 on the Eastern Tributary compared to that observed up to and including the autumn 2018 vegetation survey; and - does not identify vegetation dieback greater than 50 cm from the stream at sites MRIP01, MRIP03, MRIP04, MRIP06, MRIP07, MRIP08, MRIP10 or MRIP10, MRIP01, mripos, ubsidence.	Consider recent stream features mapping results and pool water level monitoring data. Consider extent of erosion associated with areas of vegetation dieback and whether management measures are required. Six monthly reporting.			
		sites MRIP07 and MRIP08 downstream of LW23-27.					2018 survey.	Level 3	Vegetation monitoring: - identifies an increase in the extent of vegetation dieback at site MRIP02 on the Waratah Rivulet and between sites MRIP05 and MRIP09 on the Eastern Tributary compared to that observed up to and including the autumn 2018 vegetation survey; and - identifies vegetation dieback greater than 50 cm from the stream at sites MRIP01, MRIP03, MRIP04, MRIP06, MRIP07, MRIP08, MRIP10 or MRIP10, MRIP10, MRIP10 or MRIP12, as a result of mine subsidence.	Consider recent stream features mapping results and pool water level monitoring data. Initiate assessment against the performance measure ¹ . Consider the need for management measures, in accordance with Sections 8 and

Threatened species, populations and ecological communities include those listed under the BC Act, EPBC Act or Fisheries Management Act at the time of Project Approval (i.e. the lists current as at 22 June 2009).

Appendix D: Species lists – Upland swamp monitoring sites and riparian monitoring sites

Longwalls 20-22 – Autumn 2020

Species list – Upland Swamp monitoring sites

Family	Species	Common Name		
	Laxmannia gracilis	Slender Wire Lily		
Anthericaceae	Thysanotus juncifolius	,		
	Actinotus minor	Lesser Flannel Flower		
	Hydrocotyle laxiflora	Stinking Pennywort		
Apiaceae	Platysace linearifolia	,		
·	Xanthosia pilosa	Woolly Xanthosia		
	Xanthosia tridentata	Rock Xanthosia		
Asteraceae	Conyza sp.*	A Fleabane		
	Allocasuarina distyla			
Casuarinaceae	Allocasuarina littoralis	Black She-Oak		
Colchicaceae	Burchardia umbellata	Milkmaids		
	Bauera microphylla			
Cunoniaceae	Bauera rubioides	River Rose		
	Baumea sp.			
	Chorizandra cymbaria			
	Cyathochaeta diandra			
	Gahnia sieberi			
	Gahnia sieberiana	Red-fruit Saw-sedge		
	Lepidosperma filiforme	nea nancam sease		
	Lepidosperma laterale	Variable Sword-sedge		
Cyperaceae	Lepidosperma limicola	variable sword seage		
Cyperaceae	Lepidosperma neesii			
	Lepidosperma quadrangulatum			
	Ptilothrix deusta			
	Schoenus brevifolius			
	Schoenus ericetorum			
	Schoenus melanostachys			
	Tetraria capillaris			
Dicksoniaceae	Calochlaena dubia	Rainbow Fern		
Dieksoniaceae	Hibbertia riparia	Training Witchin		
Dilleniaceae	Hibbertia serpyllifolia	Hairy Guinea Flower		
	Drosera binata	Forked Sundew		
Droseraceae	Drosera peltata	A Sundew		
Diosciaceae	Drosera spatulata	// Surfacev		
Dryopteridaceae	Lastreopsis sp.			
Elaeocarpaceae	Tetratheca neglecta ▲3RC-			
Liacocai paccac	Epacris microphylla	Coral Heath		
	Epacris obtusifolia	Blunt-leaf Heath		
	Epacris paludosa	Swamp Heath		
	Leucopogon amplexicaulis	Beard-heath		
Ericaceae	Leucopogon esquamatus	Beard Heath		
Lileaceae	Leucopogon microphyllus var. microphyllus			
	Monotoca scoparia			
	Sprengelia incarnata	Pink Swamp Heath		
	Styphelia tubiflora	Red Five-Corner		
	Bossiaea scolopendria	Red Five Comer		
	Bossiaea sp.			
Fahacaaa (Fahaidaaa)		+		
Fabaceae (Faboideae)	Daviesia corymbosa Dillwynia floribunda	+		
	Dillwynia sp.	+		
	Diliwyiliu Sp.			

© ECO LOGICAL AUSTRALIA PTY LTD

16

Longwalls 20-22 – Autumn 2020

Species list – Upland Swamp monitoring sites

Family	Species	Common Name			
	Gompholobium glabratum	Dainty Wedge Pea			
	Gompholobium sp.				
	Hovea linearis				
	Mirbelia rubiifolia	Heathy Mirbelia			
	++Pultenaea aristata ▲2V	Prickly Bush-pea			
	Pultenaea stipularis	· · ·			
	Pultenaea tuberculata				
	Acacia longifolia subsp. longifolia	Sydney Golden Wattle			
	Acacia myrtifolia	Red-stemmed Wattle			
Fabaceae (Mimosoideae)	Acacia rubida	Red-stemmed Wattle			
	Acacia sp.	Wattle			
	Acacia suaveolens	Sweet Wattle			
	Gleichenia dicarpa	Pouched Coral Fern			
Gleicheniaceae	Gleichenia microphylla	Scrambling Coral Fern			
Goodeniaceae	Dampiera stricta	Scrambling Corain Citi			
Goodemaceae	Gonocarpus micranthus				
Haloragaceae	Gonocarpus tetragynus	Poverty Raspwort			
Haloragaceae	Gonocarpus teucrioides	Germander Raspwort			
 Iridaceae	Patersonia sericea	Silky Purple-Flag			
Lauraceae	Cassytha glabella	Silky Fulpie-Hag			
Lindsaeaceae	Lindsaea linearis	Screw Fern			
Loganiaceae	Mitrasacme polymorpha	Screw rem			
Logamaceae	Lomandra cylindrica				
	Lomandra glauca	Pale Mat-rush			
Lomandraceae	Lomandra gracilis	raie iviat-i usii			
Lomanuraceae	-	Many flavored Met ruch			
	Lomandra multiflora	Many-flowered Mat-rush			
	Lomandra obliqua	Curlin av. Da d Curra			
	Angophora costata	Sydney Red Gum			
	Angophora hispida Baeckea imbricata	Dwarf Apple			
		Maning Decelor			
	Baeckea linifolia	Weeping Baeckea Crimson Bottlebrush			
	Callistemon citrinus				
	Calytrix tetragona	Common Fringe-myrtle			
	Corymbia gummifera	Red Bloodwood			
	Darwinia diminuta ▲ 2RCi				
	Darwinia fascicularis				
	Eucalyptus haemastoma	Broad-leaved Scribbly Gum			
	Eucalyptus luehmanniana ▲ 2RCa	Yellow Top Mallee Ash			
Myrtaceae	Eucalyptus oblonga	Stringybark			
	Eucalyptus piperita	Sydney Peppermint			
	Eucalyptus racemosa	Narrow-leaved Scribbly Gum			
	Eucalyptus sieberi	Silvertop Ash			
	Eucalyptus sp.				
	Kunzea capitata				
	Leptospermum arachnoides				
	Leptospermum grandifolium	Woolly Teatree			
	Leptospermum juniperinum	Prickly Tea-tree			
	Leptospermum squarrosum				
	Leptospermum trinervium	Slender Tea-tree			
	Melaleuca squarrosa	Scented Paperbark			

© ECO LOGICAL AUSTRALIA PTY LTD

17

Longwalls 20-22 - Autumn 2020

Species list – Upland Swamp monitoring sites

Family	Species Common Name					
railily	<u> </u>					
Oughidassa	Cryptostylis erecta	Tartan Tongue Orchid				
Orchidaceae	Genoplesium fimbriatum	Fringed Midge Orchid				
	Microtis sp.					
Plantaginaceae	Veronica plebeia	Trailing Speedwell				
	Anisopogon avenaceus	Oat Speargrass				
	Entolasia stricta	Wiry Panic				
Poaceae	Microlaena stipoides	Weeping Grass				
	Plinthanthesis paradoxa					
	Tetrarrhena turfosa					
	Banksia ericifolia subsp. ericifolia					
	Banksia marginata	Silver Banksia				
	Banksia oblongifolia	Fern-leaved Banksia				
	Banksia robur	Swamp Banksia				
	Banksia serrata	Old-man Banksia				
	Grevillea oleoides	Red Spider Flower				
	Hakea dactyloides	Finger Hakea				
	Hakea gibbosa					
Proteaceae	Hakea teretifolia	Needlebush				
	Isopogon anemonifolius	Broad-leaf Drumsticks				
	Isopogon anethifolius	Narrow-leaf Drumsticks				
	Lambertia formosa	Mountain Devil				
	Lomatia silaifolia	Crinkle Bush				
	Persoonia pinifolia	Pine-leaved Geebung				
	Petrophile pulchella	Conesticks				
	Petrophile sessilis					
	Symphionema paludosum					
	Baloskion gracile					
	Chordifex dimorphus					
	Chordifex fastigiatus					
	Empodisma minus					
Restionaceae	Eurychorda complanata					
	Leptocarpus tenax					
	Lepyrodia scariosa					
	Sporadanthus gracilis					
Rhamnaceae						
Rutaceae						
Santalaceae	Boronia parviflora Swamp Boronia Lentemaria grida Sour Current Bush					
Schizaeaceae	Leptomeria acida Sour Currant Bush Schizgeg hifida Forked Comb Fern					
Selaginellaceae	Schizaea bifidaForked Comb FernSelaginella uliginosaSwamp Selaginella					
Stylidiaceae	Selaginella uliginosa Swamp Selaginella Stylidium lineare Narrow-leaved Triggerpla					
Thymelaeaceae	Pimelea linifolia Slender Rice Flower					
тпутпетаеасеае	Siction vice Flower					
Xanthorrhoeaceae	Xanthorrhoea resinosa					
Vuridadaa	Xanthorrhoea sp.					
Xyridaceae	Xyris gracilis					

Non-native species

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- R: Rare in Australia but does not have an identifiable threat
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve

⁺⁺ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

- V: Taxon not presently Endangered, but at risk over a longer period
- a: 1000 plants or more are known to occur within a conservation reserve(s)
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- -: reserved population size is not accurately known

Longwalls 20-22 – Autumn 2020

Species list – Riparian monitoring sites

Family	Species	Common Name			
· ammy	Platysace linearifolia	Common Name			
Apiaceae	Xanthosia pilosa	Woolly Xanthosia			
Аріассас	Xanthosia tridentata	Rock Xanthosia			
Asteraceae	Hypochaeris radicata*	Catsear			
Asteraceae	Allocasuarina distyla	Catseal			
Casuarinaceae	Allocasuarina littoralis	Black She-Oak			
	Bauera rubioides	River Rose			
Cunoniaceae	Callicoma serratifolia	Black Wattle			
Cullottiaceae	Ceratopetalum apetalum	Coachwood			
Cupressaceae	Callitris rhomboidea	Port Jackson Pine			
Cupressaceae		POLL JACKSON FINE			
	Baumea juncea				
	Baumea sp. Caustis pentandra	Thick Twist Rush			
		THICK I WIST RUSH			
	Chorizandra cymbaria				
Cyperaceae	Cyperus sp.	Dutter Crees			
	Gymnoschoenus sphaerocephalus	Button Grass			
	Isolepis sp.	Club-rush			
	Lepidosperma laterale	Variable Sword-sedge			
	Schoenus brevifolius				
Danis della cons	Schoenus melanostachys	Paralaga			
Dennstaedtiaceae	Pteridium esculentum	Bracken			
Dilleniaceae	Hibbertia aspera	Rough Guinea Flower			
	Hibbertia nitida ▲ 2RC-				
Doryanthaceae	Doryanthes excelsa	Gymea Lily			
Droseraceae	Drosera binata	Forked Sundew			
	Drosera spatulata				
	Epacris microphylla	Coral Heath			
	Epacris obtusifolia	Blunt-leaf Heath			
Ericaceae	Epacris pulchella	Wallum Heath			
	Leucopogon amplexicaulis	Beard-heath			
	Monotoca scoparia				
	Styphelia tubiflora	Red Five-Corner			
Euphorbiaceae	Micrantheum ericoides				
,	Pseudanthus pimeleoides				
	Aotus ericoides				
Fabaceae (Faboideae)	Dillwynia floribunda				
	Pultenaea stipularis				
	Acacia longifolia				
	Acacia longifolia subsp. longifolia	Sydney Golden Wattle			
Fabaceae (Mimosoideae)	Acacia obtusifolia				
	Acacia sp.	Wattle			
	Acacia terminalis	Sunshine Wattle			
Gleicheniaceae	Gleichenia microphylla	Scrambling Coral Fern			
	Sticherus flabellatus	Umbrella Fern			
Goodeniaceae	Dampiera stricta				
Haloragaceae	Gonocarpus teucrioides	Germander Raspwort			
Juncaginaceae	Triglochin procera	Water Ribbons			
Lamiaceae	Prostanthera linearis	Narrow-leaved Mint-bush			
Lauraceae	Cassytha glabella				
Lindsaeaceae	Lindsaea linearis	Screw Fern			

Longwalls 20-22 – Autumn 2020

Species list – Riparian monitoring sites

Family	Species	Common Name		
Loganiaceae	Logania albiflora			
	Lomandra fluviatilis ▲ 3RCa			
Lomandraceae	Lomandra gracilis			
	Lomandra longifolia	Spiny-headed Mat-rush		
	Lomandra obliqua			
	Lomandra sp.	Mat-rush		
	Angophora costata	Sydney Red Gum		
	Baeckea linifolia	Weeping Baeckea		
	Callistemon citrinus	Crimson Bottlebrush		
	Eucalyptus agglomerata	Blue-leaved Stringybark		
	Eucalyptus piperita	Sydney Peppermint		
	Eucalyptus sieberi	Silvertop Ash		
	Kunzea ambigua	Tick Bush		
Myrtaceae	Leptospermum morrisonii			
	Leptospermum polygalifolium			
	Leptospermum squarrosum			
	Leptospermum trinervium	Slender Tea-tree		
	Melaleuca squarrosa	Scented Paperbark		
	Tristania neriifolia	Water Gum		
	Tristaniopsis laurina	Kanooka		
Phormiaceae	Dianella caerulea	Blue Flax-lily		
Pittosporaceae	Billardiera scandens	Hairy Apple Berry		
	Anisopogon avenaceus	Oat Speargrass		
	Entolasia stricta	Wiry Panic		
Poaceae	Microlaena stipoides	Weeping Grass		
	Tetrarrhena turfosa	The serving course		
	Banksia ericifolia subsp. ericifolia			
	Banksia marginata	Silver Banksia		
	Banksia oblongifolia	Fern-leaved Banksia		
	Banksia serrata	Old-man Banksia		
	Banksia spinulosa	Hairpin Banksia		
	Hakea dactyloides	Finger Hakea		
	Hakea salicifolia	Willow-leaved Hakea		
Proteaceae	Hakea sericea	Needlebush		
	Hakea teretifolia	Needlebush		
	Lambertia formosa	Mountain Devil		
	Lomatia myricoides	River Lomatia		
	Persoonia pinifolia	Pine-leaved Geebung		
	Petrophile pulchella	Conesticks		
	Stenocarpus salignus	Scrub Beefwood		
	Chordifex fastigiatus	35.52 255354		
	Empodisma minus			
Restionaceae	Eurychorda complanata			
Nestionaleae	Leptocarpus tenax			
	Sporadanthus gracilis			
Rhamnaceae	Pomaderris elliptica			
Rubiaceae	Opercularia aspera	Coarse Stinkweed		
nasiaccac	Leionema dentatum	Toothed Phebalium		
Rutaceae	Leionema diosmeum	Toothea r neballani		
Nutateae	Phebalium squamulosum	Scaly Phobalium		
	rnepanam squamuosum	Scaly Phebalium		

Longwalls 20-22 - Autumn 2020

Species list – Riparian monitoring sites

Family	Species	Common Name	
Santalaceae	Leptomeria acida	Sour Currant Bush	
Sapindaceae	Dodonaea triquetra	Large-leaf Hop-bush	
Scrophulariaceae	Gratiola pumilo		
Smilacaceae	Smilax glyciphylla	Sweet Sarsparilla	
Sterculiaceae	Lasiopetalum ferrugineum		
Thymelaeaceae	Pimelea linifolia	Slender Rice Flower	
Xanthorrhoeaceae	Xanthorrhoea media		
V. wide eee	Xyris gracilis		
Xyridaceae	Xyris operculata		

* Non-native species

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- R: Rare in Australia but does not have an identifiable threat
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- a: 1000 plants or more are known to occur within a conservation reserve(s)
- -: reserved population size is not accurately known

Appendix E: Vegetation monitoring raw data — Valley side swamp monitoring sites

E1: Vegetation structure, dominant species and estimated cover for each stratum – Valley side swamps

Valley Side Swamp monitoring sites – Autumn 2020

Swamp 16 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species	
Transect 1						
S16T1Q1A20	Т	9	10	10	Eucalyptus piperita	
	M1	0.6	3	25	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Leptospermum squarrosum	
	L1	0	0.5	30	Lomandra obliqua, Lepidosperma filiforme, Stylidium lineare	
S16T1Q2A20	M1	1	3	60	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum	
	L1	0	0.9	10	Lepidosperma filiforme, Lepyrodia scariosa, Lepidosperma neesii	
	Т	4	5	1	Hakea dactyloides	
S16T1Q3A20	M1	0.5	2.8	50	Leptospermum squarrosum, ++Pultenaea aristata ▲ 2V, Hakea teretifolia, Kunzea capitata	
	L1	0	1.2	15	Lepidosperma neesii, Ptilothrix deusta, Lepyrodia scariosa	
C1CT1O1120	M1	0.5	1.8		Banksia ericifolia subsp. ericifolia, Kunzea capitata	
S16T1Q4A20	L1	0	1.5	30	Chordifex dimorphus, Xanthorrhoea sp., Lepidosperma filiforme	
Transect 2				•		
	Т	7	7	10	Eucalyptus oblonga	
S16T2Q1A20	M1	0.2	2.2	50	Angophora hispida	
	L1	0	1.8	30	Lepidosperma limicola, Patersonia sericea	
C1CT2O2A20	M1	0.2	1.7	15	Banksia ericifolia subsp. ericifolia, Petrophile pulchella	
S16T2Q2A20	L1	0	0.5	5	Lomandra glauca, Lepidosperma limicola, Ptilothrix deusta	
C1CT2O2A20	M1	0.6	2	30	Banksia ericifolia subsp. ericifolia, Petrophile pulchella	
S16T2Q3A20	L1	0	0.5	10	Ptilothrix deusta, Lomandra glauca	
Transect 3				•		
	Т	8	10	10	Eucalyptus racemosa	
S16T3Q1A20	M1	0.5	3.5	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea dactyloides	
	L1	0	1.3	15	Lepyrodia scariosa, Schoenus brevifolius, Epacris microphylla	
C4.CT2.O2.4.2.0	M1	0.8	3	80	Angophora hispida, Banksia ericifolia subsp. ericifolia	
S16T3Q2A20	L1	0	1	5	Ptilothrix deusta, Lepyrodia scariosa	
C4.CT2.O2.4.2.0	M1	1.4	3.2	55	Hakea teretifolia, Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum	
S16T3Q3A20	L1	0	0.7	20	Xanthorrhoea sp., Ptilothrix deusta, Lepyrodia scariosa	
C1CT2O4420	M1	2.2	3.5	35	Angophora hispida, Banksia ericifolia subsp. ericifolia, Allocasuarina littoralis	
S16T3Q4A20	L1	0	0.5	25	Chordifex dimorphus, Kunzea capitata, Lepidosperma filiforme	
S16T3Q5A20	M1	0.7	2.7	50	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Kunzea capitata	
	L1	0	1.6	40	Chordifex fastigiatus, Ptilothrix deusta	

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

▲ RoTAP species:

2: Geographic range in Australia less than 100 km

V: Taxon not presently Endangered, but at risk over a longer period

Valley Side Swamp monitoring sites - Autumn 2020

Swamp 17 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species		
Transect 1							
S17T1Q1A20	M1	0.2	1.9	35	Petrophile pulchella, Banksia ericifolia subsp. ericifolia		
31711Q1A20	L1	0	1	10	Xanthorrhoea sp., Ptilothrix deusta, Lepidosperma filiforme		
S17T1Q2A20	M1	1	2.5	25	Petrophile pulchella, Banksia ericifolia subsp. ericifolia		
31/11Q2A20	L1	0	0.5	10	Ptilothrix deusta, Chordifex dimorphus		
C47T4 02 4 20	M1	0.8	2	40	Kunzea capitata, Petrophile pulchella, Isopogon anethifolius		
S17T1Q3A20	L1	0	0.8	5	Chordifex dimorphus, Lepyrodia scariosa		
Transect 2							
C17T2O1A2O	M1	1	2	30	Petrophile pulchella, Leptospermum squarrosum		
S17T2Q1A20	L1	0	1.3	10	Chordifex fastigiatus, Ptilothrix deusta		
S17T2Q2A20	Т	7	7	5	Eucalyptus racemosa		
	M1	0.7	2.2	30	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella		
	L1	0	1.3	5	Chordifex fastigiatus, Hibbertia riparia, Lepyrodia scariosa		
	Т	3	5	15	Eucalyptus oblonga		
S17T2Q3A20	M1	0.3	2	30	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Leptospermum squarrosum		
	L1	0	1	5	Lepidosperma filiforme, Lepyrodia scariosa		
S17T2Q4A20	M1	0.1	1.8	40	Banksia marginata, Hibbertia serpyllifolia		
31/12Q4A20	L1	0	1.2	3	Lepyrodia scariosa, Ptilothrix deusta		
C17T2OF A20	M1	0.3	2.5	30	Lambertia formosa, Banksia ericifolia subsp. ericifolia, Hibbertia riparia		
S17T2Q5A20	L1	0	1.1	10	Lepidosperma filiforme, Chordifex dimorphus, Lepyrodia scariosa		
C17T2OC12O	M1	0.5	2.2	25	Banksia ericifolia subsp. ericifolia, Angophora hispida, Kunzea capitata		
S17T2Q6A20	L1	0	0.8	15	Chordifex dimorphus, Lepidosperma filiforme, Ptilothrix deusta		
C17T2O7A2O	M1	0.2	3	40	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Leptospermum arachnoides		
S17T2Q7A20	L1	0	1	10	Chordifex fastigiatus, Lepyrodia scariosa, Ptilothrix deusta		
Transect 3							
	Т	9	9	2	Eucalyptus oblonga		
S17T3Q1A20	M1	1.3	6	35	Allocasuarina littoralis, Petrophile pulchella, Banksia ericifolia subsp. ericifolia		
	L1	0	1	10	Lepidosperma filiforme, Tetratheca neglecta ▲ 3RC-, Lomandra filiformis subsp. coriacea		
C17T2O2A20	M1	0.2	3.5	40	Leptospermum trinervium, Hakea dactyloides, Angophora hispida, Pultenaea stipularis		
S17T3Q2A20	L1	0	1	15	Lepidosperma filiforme, Ptilothrix deusta		
S17T3Q3A20	M1	1.2	1.8	60	Angophora hispida, Hakea teretifolia, Banksia ericifolia subsp. ericifolia		

Swamp 17 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
	L1	0	0.5	5	Lepyrodia scariosa, Ptilothrix deusta
S17T3Q4A20	M1	1	2	10	Banksia ericifolia subsp. ericifolia
31713Q4A20	L1	0	0.5	20	Lepidosperma filiforme
S17T3Q5A20	M1	0.5	3.5	40	Angophora hispida, Banksia ericifolia subsp. ericifolia, Kunzea capitata
31/13Q3A20	L1	0	1.2	5	Xanthorrhoea sp., Lepidosperma filiforme, Lepyrodia scariosa
C17T2OCA20	M1	0.3	0.5	25	Calytrix tetragona, Petrophile pulchella
S17T3Q6A20	L1	0	0.2	5	Lepyrodia scariosa, Ptilothrix deusta

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

▲ RoTAP species:

3: Geographic range in Australia more than 100 km

R: Rare in Australia but does not have an identifiable threat

C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve

-: reserved population size is not accurately known

Swamp 18 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1	'		, , ,		
S18T1Q1A20	M1	0.2	3	25	Kunzea capitata, Hibbertia serpyllifolia
31811Q1A20	L1	0	0.9	3	Chordifex dimorphus
S18T1Q2A20	M1	1.5	2	25	Isopogon anethifolius, Banksia ericifolia subsp. ericifolia
31811Q2A20	L1	0	1.2	10	Chordifex dimorphus, Xanthorrhoea sp., Chordifex fastigiatus
S18T1Q3A20	M1	0.6	1.8	30	Isopogon anethifolius, Petrophile pulchella, Hakea gibbosa
31611Q3A20	L1	0	1.1	5	Chordifex fastigiatus, Chordifex dimorphus
C10T104420	M1	0.2	3	50	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Kunzea capitata
S18T1Q4A20	L1	0	1	20	Chordifex fastigiatus, Ptilothrix deusta
C10T1OF A20	M1	1.2	2.5	30	Kunzea capitata, Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S18T1Q5A20	L1	0	1.2	20	Chordifex dimorphus, Lepyrodia scariosa, Lepidosperma neesii
C10T106A20	M1	0.2	2.1	50	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Kunzea capitata
S18T1Q6A20	L1	0	1.2	10	Chordifex fastigiatus
C10T107A20	M1	0.5	1.8	35	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Baeckea imbricata
S18T1Q7A20	L1	0	1.2	5	Chordifex fastigiatus, Lepyrodia scariosa, Ptilothrix deusta
	Т	5	5	10	Corymbia gummifera
S18T1Q8A20	M1	0.5	3.5	45	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Leucopogon microphyllus
	L1	0	1	15	Chordifex fastigiatus, Ptilothrix deusta
C10T100A20	M1	0.6	1.7	20	Kunzea capitata, Petrophile pulchella, Baeckea imbricata
S18T1Q9A20	L1	0	1.2	10	Chordifex fastigiatus, Hibbertia serpyllifolia
Transect 2					
C10T2O1A20	M1	0.1	2	35	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Calytrix tetragona
S18T2Q1A20	L1	0	1.3	10	Chordifex fastigiatus, Chordifex dimorphus
C10T2O2A20	M1	1	1.6	20	Kunzea capitata, Petrophile pulchella, Calytrix tetragona
S18T2Q2A20	L1	0	0.8	5	Chordifex fastigiatus, Lepyrodia scariosa, Baeckea imbricata
C10T2O2420	M1	0.4	1.7	30	Banksia ericifolia subsp. ericifolia, Kunzea capitata, Petrophile pulchella
S18T2Q3A20	L1	0	1.2	10	Chordifex fastigiatus, Ptilothrix deusta, Lepyrodia scariosa
C10T2O4A2O	M1	1	2	25	Petrophile pulchella, Banksia ericifolia subsp. ericifolia, Kunzea capitata
S18T2Q4A20	L1	0	1.2	5	Chordifex fastigiatus, Ptilothrix deusta
C10T2OE A2O	M1	0.4	1.8	15	Banksia ericifolia subsp. ericifolia, Kunzea capitata, Petrophile pulchella
S18T2Q5A20	L1	0	0.6	5	Chordifex fastigiatus, Lepyrodia scariosa

Swamp 18 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
C10T2OC420	M1	1	2.2	40	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia, Hakea teretifolia
S18T2Q6A20	L1	0	0.6	15	Empodisma minus, Lepidosperma filiforme, Ptilothrix deusta
S18T2Q7A20	M1	0.4	2	40	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia, Petrophile pulchella
31812Q/A2U	L1	0	1.2	20	Xanthorrhoea sp., Chordifex fastigiatus, Bauera microphylla
C10T2O0A2O	M1	0.1	1.8	15	Kunzea capitata, Baeckea imbricata
S18T2Q8A20	L1	0	1	5	Chordifex fastigiatus, Lepyrodia scariosa
C10T200420	M1	0.6	2	25	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Baeckea imbricata
S18T2Q9A20	L1	0	1.3	5	Chordifex fastigiatus, Lepyrodia scariosa
C40T2O40A20	M1	0.5	2.5	40	Leptospermum squarrosum, Callistemon citrinus, Banksia ericifolia subsp. ericifolia
S18T2Q10A20	L1	0	1.3	10	Chordifex fastigiatus, Lepyrodia scariosa, Bauera microphylla
Transect 3	•				
C10T2O1A2O	M1	1.2	3	60	Hakea teretifolia, Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S18T3Q1A20	L1	0	1	5	Chordifex fastigiatus, Ptilothrix deusta
C10T2O2A2O	M1	0.2	2	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Kunzea capitata
S18T3Q2A20	L1	0	1.2	5	Chordifex fastigiatus, Ptilothrix deusta, Lepyrodia scariosa
C40T2O2A2O	M1	0.7	1.8	25	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S18T3Q3A20	L1	0	1.2	5	Chordifex fastigiatus, Ptilothrix deusta
C10T2O4420	M1	0.3	2.5	30	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S18T3Q4A20	L1	0	1	5	Lepidosperma filiforme, Lepyrodia scariosa
C10T2OF 420	M1	0.3	1.8	45	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Epacris microphylla
S18T3Q5A20	L1	0	1	10	Lepidosperma filiforme, Lepyrodia scariosa, Actinotus minor

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

Swamp 24 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1					
C24T1O1A2O	M1	1.5	3.2	40	Hakea teretifolia, Kunzea capitata, Banksia ericifolia subsp. ericifolia
S24T1Q1A20	L1	0	0.9	25	Baloskion gracile, Leptocarpus tenax, Hibbertia serpyllifolia
C24T1O2A2O	M1	0.5	3	50	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Baeckea imbricata
S24T1Q2A20	L1	0	1	15	Empodisma minus, Schoenus brevifolius
C24T1O2A2O	M1	0.5	3	60	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S24T1Q3A20	L1	0	0.5	45	Empodisma minus, Xyris gracilis, Ptilothrix deusta
C24T1O4A20	M1	1.5	3	35	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum, Epacris obtusifolia
S24T1Q4A20	L1	0	1.4	10	Empodisma minus, Bauera microphylla, Leptocarpus tenax
C24T1OE A20	M1	1	2.5	40	Banksia ericifolia subsp. ericifolia, Banksia oblongifolia, Hakea teretifolia
S24T1Q5A20	L1	0	1.4	20	Chordifex fastigiatus, Empodisma minus, Xanthorrhoea resinosa
C24T1O6A20	M1	0.5	3	40	Banksia ericifolia subsp. ericifolia, Baeckea imbricata, Leptospermum squarrosum
S24T1Q6A20	L1	0	1	10	Empodisma minus, Schoenus brevifolius, Ptilothrix deusta
Transect 2					
	Т	5	8	40	Eucalyptus haemastoma, Corymbia gummifera
S24T2Q1A20	M1	1.5	3	80	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum
	L1	0	1.7	90	Empodisma minus, Chordifex dimorphus
C24T2O2A2O	M1	1.5	3	35	Hakea teretifolia, Leptospermum squarrosum, Kunzea capitata
S24T2Q2A20	L1	0	1.2	25	Baloskion gracile, Lepidosperma filiforme, Empodisma minus
C24T2O2A2O	M1	0.4	2.5	60	Banksia ericifolia subsp. ericifolia, Baeckea imbricata, Leptospermum arachnoides
S24T2Q3A20	L1	0	1.2	20	Chordifex fastigiatus, Lepidosperma filiforme, Empodisma minus
C24T2O4A2O	M1	1	2.5	70	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S24T2Q4A20	L1	0	1.5	45	Chordifex fastigiatus, Lepidosperma filiforme, Ptilothrix deusta
S24T2Q5A20	M1	1	3	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Baeckea imbricata
32412Q3A20	L1	0	1	10	Lepidosperma neesii, Schoenus brevifolius, Chordifex fastigiatus
Transect 3					
S24T3Q1A20	M1	0.7	2.5	20	Hakea teretifolia, Banksia ericifolia subsp. ericifolia, Kunzea capitata
32413Q1A2U	L1	0	1.2	7	Chordifex fastigiatus, Lepyrodia scariosa, Xanthorrhoea resinosa
S24T3Q2A20	M1	0.3	2.2	10	Kunzea capitata, Banksia ericifolia subsp. ericifolia, Baeckea imbricata
32413Q2A2U	L1	0	1	5	Lepidosperma filiforme, Chordifex fastigiatus
S24T3Q3A20	M1	0.3	2	30	Banksia ericifolia subsp. ericifolia, Kunzea capitata, Epacris microphylla

Swamp 24 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
	L1	0	0.4	5	Stylidium lineare, Lepyrodia scariosa, Lepidosperma filiforme
	Т	3	6	15	Corymbia gummifera
S24T3Q4A20	M1	0.5	1.5	5	Banksia ericifolia subsp. ericifolia, Acacia suaveolens
	L1	0	1.2	1	Xanthorrhoea resinosa, Lepidosperma neesii

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

Swamp 25 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1					
	Т	6	6	1	Eucalyptus luehmanniana ▲ 2RCa
S25T1Q1A20	M1	0.7	2.4	60	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Bauera microphylla
	L1	0	0.8	10	Empodisma minus, Leptocarpus tenax, Epacris microphylla
	Т	4	4	5	Eucalyptus luehmanniana ▲ 2RCa
S25T1Q2A20	M1	0.8	2.4	60	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
	L1	0	1.5	40	Xanthorrhoea resinosa, Empodisma minus, Ptilothrix deusta
C25T4 O2 A2O	M1	1.2	2.5	40	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Bauera microphylla
S25T1Q3A20	L1	0	0.4	5	Lepidosperma neesii
C25T4.O.4.A.2.O.	M1	1.8	3.5	50	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Leptospermum squarrosum
S25T1Q4A20	L1	0	1	1	Schoenus brevifolius, Empodisma minus
C2FT1OF A20	M1	1.1	2.3	35	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S25T1Q5A20	L1	0	1.2	5	Schoenus brevifolius, Chordifex fastigiatus, Lepyrodia scariosa
C2FT1OCA20	M1	0.8	2.3	45	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Baeckea imbricata
S25T1Q6A20	L1	0	0.7	5	Chordifex fastigiatus, Ptilothrix deusta
C25T4 O 7 A 2 O	M1	1	2.4	40	Banksia ericifolia subsp. ericifolia, Baeckea imbricata, Hakea teretifolia
S25T1Q7A20	L1	0	1	5	Chordifex fastigiatus, Schoenus brevifolius, Ptilothrix deusta
C25T4 O 0 A 2 O	M1	0.5	3	20	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S25T1Q8A20	L1	0	0.6	1	Chordifex fastigiatus, Lepyrodia scariosa, Schoenus brevifolius
Transect 2					
	Т	4	5	5	Corymbia gummifera
S25T2Q1A20	M1	1.6	3.5	45	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum
	L1	0	0.5	10	Empodisma minus, Hibbertia serpyllifolia, Ptilothrix deusta
S25T2Q2A20	L1	0	0.9	30	Chordifex fastigiata, Xanthorrhoea resinifera
C25T2O2A20	M1	0.5	2.5	30	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum
S25T2Q3A20	L1	0	1	10	Chordifex fastigiatus, Lepyrodia scariosa, Xanthorrhoea resinosa
C2FT2O4420	M1	1	3	50	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum
S25T2Q4A20	L1	0	1.5	10	Chordifex fastigiatus, Lepyrodia scariosa, Bauera microphylla
Transect 3					
S25T3Q1A20	Т	6	8	20	Eucalyptus haemastoma
32313Q1A2U	M1	1.2	4	35	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Persoonia pinifolia

Swamp 25 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
	L1	0	1.4	10	Xanthorrhoea resinosa, Empodisma minus, Ptilothrix deusta
	Т	8	8	1	Eucalyptus haemastoma
S25T3Q2A20	M1	1.5	4	50	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia, Petrophile pulchella
	L1	0	0.9	1	Xanthorrhoea resinosa, Entolasia stricta, Lepidosperma neesii
C2FT2O2A20	M1	3	4	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S25T3Q3A20	L1	0	0.6	1	Ptilothrix deusta, Lepidosperma neesii, Empodisma minus
C2FT2O4A20	M1	0.8	3.5	40	Hakea teretifolia, Leptospermum squarrosum, Petrophile pulchella
S25T3Q4A20	L1	0	1	15	Lepidosperma neesii, Empodisma minus, Schoenus brevifolius
	M1	1.2	2.5	30	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia, Hakea teretifolia
S25T3Q5A20	L1	0	1.3	20	Schoenus brevifolius, Empodisma minus, Lepyrodia scariosa

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- R: Rare in Australia but does not have an identifiable threat
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- a: 1000 plants or more are known to occur within a conservation reserve(s)

Swamp 101 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1					
S101T1Q1A20	M1	1.2	4	30	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Hakea teretifolia
310111Q1A20	L1	0	1.2	1	Empodisma minus, Lepidosperma neesii
	Т	5	5	1	Eucalyptus oblonga
S101T1Q2A20	M1	2	3.5	40	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia, Hakea teretifolia
	L1	0	1	5	Lepidosperma neesii, Ptilothrix deusta, Cyathochaeta diandra
S101T1Q3A20	M1	1	3.5	30	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
310111Q3A20	L1	0	0.5	5	Lepidosperma neesii, Leptocarpus tenax, Ptilothrix deusta
C101T104A20	M1	1.3	2.3	75	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S101T1Q4A20	L1	0	1.1	25	Lepidosperma neesii, Ptilothrix deusta, Schoenus brevifolius
C101T10F A20	M1	0.6	2	40	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia, Hakea teretifolia
S101T1Q5A20	L1	0	1.3	20	Lepidosperma neesii, Lepyrodia scariosa, Schoenus brevifolius
C101T106A20	M1	1.2	2.5	70	Hakea teretifolia, Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S101T1Q6A20	L1	0	1	5	Lepidosperma neesii, Ptilothrix deusta, Schoenus brevifolius
C101T107A20	M1	1	2.5	45	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S101T1Q7A20	L1	0	1.4	20	Lepidosperma neesii, Schoenus brevifolius, Ptilothrix deusta
C101T100A20	M1	1.2	3	35	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia, Hakea teretifolia
S101T1Q8A20	L1	0	0.8	10	Lepidosperma neesii, Ptilothrix deusta, Schoenus brevifolius
C101T100A20	M1	1.1	2	45	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S101T1Q9A20	L1	0	1	10	Lepidosperma neesii, Ptilothrix deusta, Schoenus brevifolius
C101T101010	M1	0.5	2.5	15	Petrophile pulchella, Hakea teretifolia, Banksia ericifolia subsp. ericifolia
S101T1Q10A20	L1	0	1.1	10	Lepidosperma filiforme, Lepidosperma neesii
Transect 2					
C101T2O1 A20	M1	1	3.5	20	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia
S101T2Q1A20	L1	0	0.8	5	Lepidosperma neesii, Schoenus brevifolius
C101T2O2A20	M1	0.2	2	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S101T2Q2A20	L1	0	0.8	5	Lepyrodia scariosa, Lepidosperma neesii, Ptilothrix deusta
C101T2O2A20	M1	1	2.5	30	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S101T2Q3A20	L1	0	0.5	50	Ptilothrix deusta, Lepidosperma neesii, Cyathochaeta diandra
C101T201120	M1	0.5	2.2	25	Petrophile pulchella, Hakea teretifolia, Leptospermum squarrosum
S101T2Q4A20	L1	0	0.5	10	Cyathochaeta diandra, Lepidosperma neesii, Ptilothrix deusta

Swamp 101 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
C101T2OF A20	M1	0.5	2.3	50	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S101T2Q5A20	L1	0	0.7	5	Lepidosperma neesii, Leptocarpus tenax, Ptilothrix deusta
C101T2OC120	M1	1.4	2.5	45	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum
S101T2Q6A20	L1	0	0.5	75	Ptilothrix deusta, Lepidosperma neesii, Cyathochaeta diandra
S101T2Q7A20	M1	0.2	2.5	25	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
310112Q/A20	L1	0	0.7	15	Cyathochaeta diandra, Lepidosperma neesii, Ptilothrix deusta
C101T2O9A20	M1	0.7	2.5	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S101T2Q8A20	L1	0	0.5	15	Cyathochaeta diandra, Lepidosperma neesii
C101T200A20	M1	1	2.5		Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S101T2Q9A20	L1	0	0.5	55	Lepidosperma neesii, Ptilothrix deusta, Xanthorrhoea resinosa
Transect 3					
S101T3Q1A20	M1	1.5	3	75	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
310113Q1A20	L1	0	0.5	20	Lepidosperma neesii, Ptilothrix deusta, Cyathochaeta diandra
S101T3Q2A20	M1	1	2.5	60	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Leptospermum squarrosum
310113Q2A20	L1	0	1	1	Lepidosperma neesii, Ptilothrix deusta, Lepyrodia scariosa
S101T3Q3A20	M1	1	2.5	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
310113Q3A20	L1	0	1.3	10	Lepidosperma neesii, Lepyrodia scariosa, Schoenus brevifolius
S101T3Q4A20	M1	1.2	2	75	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
310113Q4A20	L1	0	0.6	35	Lepidosperma neesii, Ptilothrix deusta, Leptocarpus tenax
S101T3Q5A20	M1	0.5	3	35	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
310113Q3A20	L1	0	1	5	Lepidosperma neesii, Lepyrodia scariosa
\$101T2O6A20	M1	0.8	2.3	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S101T3Q6A20	L1	0	1.2	10	Lepidosperma neesii, Lepyrodia scariosa, Ptilothrix deusta
S101T3Q7A20	M1	1.4	2.5	55	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
310113Q/A20	L1	0	1	5	Lepidosperma neesii, Schoenus brevifolius, Ptilothrix deusta
C101T2O0A20	M1	1.5	3	30	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S101T3Q8A20	L1	0	1.6	1	Lepidosperma neesii, Lepyrodia scariosa
S101T3Q9A20	M1	1.2	2.2	90	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Baeckea imbricata
310112Q3A20	L1	0	0.5	1	Lepidosperma neesii, Ptilothrix deusta
S101T3Q10A20	M1	0.8	2	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Baeckea imbricata
STOTISCIONZO	L1	0	1.2	5	Lepidosperma neesii, Ptilothrix deusta

Swamp 101 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
C101T2O11A20	M1	0.2	2	30	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Ptilothrix deusta
S101T3Q11A20	L1	0	0.8	20	Lepidosperma neesii, Lepyrodia scariosa

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

Swamp 111a – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1	'		` /		
C111-T101120	M1	0.5	1.5	30	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Epacris microphylla
S111aT1Q1A20	L1	0	1	25	Xanthorrhoea resinosa, Lepyrodia scariosa, Cyathochaeta diandra
C111aT102A20	M1	0.8	2.5	45	Petrophile pulchella, Hakea teretifolia
S111aT1Q2A20	L1	0	1	30	Chordifex fastigiatus, Xanthorrhoea resinosa, Ptilothrix deusta
C111aT102A20	M1	0.5	1.8	50	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Hakea gibbosa
S111aT1Q3A20	L1	0	1	20	Chordifex fastigiatus, Xanthorrhoea resinosa, Ptilothrix deusta
C111-T104430	M1	0.3	2	20	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Hakea gibbosa
S111aT1Q4A20	L1	0	0.4	5	Chordifex fastigiatus, Lepidosperma neesii, Lepyrodia scariosa
C111aT1OF A 20	M1	0.3	2	25	Petrophile pulchella, Hakea teretifolia
S111aT1Q5A20	L1	0	1	5	Chordifex fastigiatus, Xanthorrhoea resinosa
	Т	4	5	40	Eucalyptus sieberi
S111aT1Q6A20	M1	0.8	3	50	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
	L1	0	1.2	10	Xanthorrhoea resinosa, Lepidosperma neesii, Entolasia stricta
Transect 2					
	Т	6	7	1	Corymbia gummifera
S111aT2Q1A20	M1	1	2.5	30	Banksia ericifolia subsp. ericifolia, Petrophile pulchella
	L1	0	1.2	20	Xanthorrhoea resinosa, Empodisma minus, Lepidosperma neesii
S111aT2Q2A20	M1	1.4	2.5	50	Leptospermum squarrosum, Banksia ericifolia subsp. ericifolia
3111a12Q2A20	L1	0	0.6	5	Ptilothrix deusta, Empodisma minus, Lepidosperma neesii
C111-T2O2A20	M1	1	3	30	Leptospermum squarrosum, Petrophile pulchella, Hakea teretifolia
S111aT2Q3A20	L1	0	0.8	10	Chordifex fastigiatus, Schoenus brevifolius, Lepidosperma neesii
C111-T201120	M1	1.8	2.5	60	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S111aT2Q4A20	L1	0	0.8	1	Chordifex fastigiatus, Schoenus brevifolius
	Т	5	5	10	Eucalyptus racemosa
S111aT2Q5A20	M1	1	2.5	50	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
	L1	0	0.6	15	Lepidosperma neesii, Lepyrodia scariosa, Schoenus brevifolius
Transect 3					
	Т	8	10	5	Eucalyptus sieberi
S111aT3Q1A20	M1	0.8	2.5	40	Leptomeria acida, Banksia ericifolia subsp. ericifolia, Leptospermum trinervium
	L1	0	1	20	Xanthorrhoea resinosa, Cyathochaeta diandra, Lepidosperma neesii

Swamp 111a – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
C111aT2O2A2O	M1	0.5	2	20	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Baeckea imbricata
S111aT3Q2A20	L1	0	0.4	5	Chordifex fastigiatus, Chordifex dimorphus, Lepidosperma filiforme
C111-T2O2A20	M1	2	3	40	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Leptospermum squarrosum
S111aT3Q3A20	L1	0	0.4	5	Empodisma minus, Ptilothrix deusta
C111aT2O4A2O	M1	1	2.5	30	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum
S111aT3Q4A20	L1	0	0.5	10	Empodisma minus, Schoenus brevifolius, Cyathochaeta diandra
C111aT2OF A20	M1	1.5	2	50	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S111aT3Q5A20	L1	0	0.6	10	Empodisma minus, Ptilothrix deusta

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

Swamp 125 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1	,				
	Т	2	3.5	5	Allocasuarina distyla, Hakea teretifolia
S125T1Q1A20	M1	1	2	40	Banksia ericifolia subsp. ericifolia, Isopogon anethifolius, Leucopogon microphyllus
	L1	0	1	7	Chordifex fastigiatus, Lepidosperma filiforme, Ptilothrix deusta
C12FT102A20	M1	1.5	2.5	60	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S125T1Q2A20	L1	0	0.5	20	Chordifex fastigiatus
C12FT102A20	M1	0.8	2	50	Banksia ericifolia subsp. ericifolia, Isopogon anethifolius, Baeckea imbricata
S125T1Q3A20	L1	0	1	15	Lepidosperma filiforme, Chordifex fastigiatus, Cyathochaeta diandra
C12FT104A20	M1	0.5	1.7	40	Banksia ericifolia subsp. ericifolia, Isopogon anethifolius, Banksia oblongifolia
S125T1Q4A20	L1	0	1.2	30	Chordifex fastigiatus, Lepidosperma filiforme, Bauera microphylla
C12FT1OF 120	M1	1	2	40	Leptospermum squarrosum, Petrophile pulchella, Banksia ericifolia subsp. ericifolia
S125T1Q5A20	L1	0	0.4	5	Chordifex fastigiatus, Ptilothrix deusta
C12FT1O6 A20	M1	0.6	2	60	Banksia marginata, Persoonia pinifolia, Banksia ericifolia subsp. ericifolia
S125T1Q6A20	L1	0	1.2	30	Chordifex dimorphus, Chordifex fastigiatus, Lepidosperma filiforme
C12FT107A20	M1	0.3	1.7	30	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Baeckea imbricata
S125T1Q7A20	L1	0	1	10	Chordifex dimorphus, Chordifex fastigiatus, Lepidosperma filiforme
Transect 2					
	Т	2	2.5	1	Hakea teretifolia, Leptospermum squarrosum
S125T2Q1A20	M1	1.5	2	30	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
	L1	0	1.5	2	Chordifex fastigiatus, Lepidosperma neesii, Empodisma minus
C12FT2O2A2O	M1	0.5	2	65	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Baeckea imbricata
S125T2Q2A20	L1	0	0.7	10	Lepidosperma filiforme, Chordifex fastigiatus, Lepyrodia scariosa
C12FT2O2A20	M1	0.5	2.2	45	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Epacris obtusifolia
S125T2Q3A20	L1	0	1	5	Schoenus brevifolius, Chordifex fastigiatus, Lepidosperma filiforme
C42FT2O4A20	M1	0.5	1.8	50	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S125T2Q4A20	L1	0	1.1	5	Chordifex fastigiatus, Schoenus brevifolius, Lepidosperma filiforme
S125T2Q5A20	M1	1.5	2	25	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
JIZJIZQJAZU	L1	0	1.2	3	Lepidosperma filiforme, Chordifex fastigiatus
C12ET2O6 A 20	M1	1.3	2.5	60	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S125T2Q6A20	L1	0	1	15	Chordifex fastigiatus, Ptilothrix deusta, Lepidosperma neesii
S125T2Q7A20	M1	1	5	35	Hakea dactyloides, Leptospermum squarrosum, Allocasuarina distyla

Swamp 125 – Vegetation structure, dominant species and estimated cover for each stratum

c'. N. I	6	Lower Height	Upper Height	Percent Cover	
Site Number	Stratum	(m)	(m)	(%)	Dominant Species
	L1	0	1.2	40	Chordifex dimorphus, Chordifex fastigiatus
C12FT2O0A20	M1	1	2.4	25	Banksia ericifolia subsp. ericifolia, Petrophile pulchella, Leptospermum squarrosum
S125T2Q8A20	L1	0	1.3	15	Xanthorrhoea resinosa, Cyathochaeta diandra, Chordifex fastigiatus
Transect 3					
	Т	2	4	5	Eucalyptus racemosa, Allocasuarina distyla
S125T3Q1A20	M1	0.5	2	40	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Petrophile pulchella
	L1	0	0.8	20	Empodisma minus, Cyathochaeta diandra, Leptocarpus tenax
C42FT2O2A2O	M1	1	2.5	55	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Petrophile pulchella
S125T3Q2A20	L1	0	0.5	5	Empodisma minus, Ptilothrix deusta
C12FT2O2A20	M1	1.5	3	25	Banksia ericifolia subsp. ericifolia, Hakea teretifolia, Leptospermum squarrosum
S125T3Q3A20	L1	0	0.5	1	Ptilothrix deusta
C12FT2O4A20	M1	0.5	3	45	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Dillwynia floribunda
S125T3Q4A20	L1	0	1	5	Empodisma minus, Lepidosperma filiforme, Lepyrodia scariosa
C42FT2OF 420	M1	2	3	75	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Isopogon anethifolius
S125T3Q5A20	L1	0	0.4	10	Ptilothrix deusta, Empodisma minus, Lepidosperma neesii
C12FT2OC120	M1	1.5	2.5	80	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Hakea teretifolia
S125T3Q6A20	L1	0	1	5	Ptilothrix deusta, Lepidosperma neesii, Cyathochaeta diandra
C12FT2O7A20	M1	1.2	2.5	50	Leptospermum squarrosum, Hakea teretifolia, Banksia ericifolia subsp. ericifolia
S125T3Q7A20	L1	0	1.2	5	Cyathochaeta diandra, Chordifex fastigiatus, Ptilothrix deusta
	Т	8	8	10	Eucalyptus haemastoma
S125T3Q8A20	M1	1.3	3	40	Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum, Epacris microphylla
	L1	0	4	5	Cyathochaeta diandra, Ptilothrix deusta, Lepyrodia scariosa
	Т	14	14	5	Eucalyptus racemosa
S125T3Q9A20	M1	1.5	2.3	30	Banksia ericifolia subsp. ericifolia, Isopogon anethifolius, Hakea teretifolia
	L1	0	0.75	5	Lepyrodia scariosa, Ptilothrix deusta

Legend:

T: Upper storey
M1: Mid storey 1
L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

E2: Estimated cover/abundance data – Valley side swamps

Swamp 16 – Vegetation cover/abundance

			Tran	sect	1		Tran	sect	2		Trans	sect 3	3
Family	Species	S16T1Q1A20	S16T1Q2A20	S16T1Q3A20	S16T1Q4A20	S16T2Q1A20	S16T2Q2A20	S16T2Q3A20	S16T3Q1A20	S16T3Q2A20	S16T3Q3A20	S16T3Q4A20	S16T3Q5A20
Anthericaceae	Thysanotus juncifolius	Ŭ,	1	0,	0,	Ŭ,	Ŭ,	Ŭ,	Ŭ,	- 7	,	, ,	•
	Actinotus minor	1	1	2	2		1	1	2			3	
	Platysace linearifolia								1		2	1	
Apiaceae	Xanthosia pilosa						2		1				
	Xanthosia tridentata											2	2
Casuarinaceae	Allocasuarina littoralis		1		1							4	
Colchicaceae	Burchardia umbellata							2					
	Cyathochaeta diandra			1						1			
	Lepidosperma filiforme	4	4	2	4				2		2	4	1
	Lepidosperma laterale					5	2						
Cyperaceae	Lepidosperma neesii	1	3	3						2	1		
	Ptilothrix deusta	3	2	3	3	3	3	3	3	3	3	2	3
	Schoenus brevifolius		1	1	1				3	2			2
Dilleniaceae	Hibbertia serpyllifolia	1	1	2	2					1			
Droseraceae	Drosera peltata	1	2	2	2								
Elaeocarpaceae	Tetratheca neglecta ▲3RC-					1			1	1			
<u> </u>	Epacris microphylla		1	1	2			1	3	1	1	1	2
	Leucopogon esquamatus						1	1			1		
Ericaceae	Leucopogon microphyllus var. microphyllus	1	4	2	2			2	3		1		1
	Styphelia tubiflora											1	
	Daviesia corymbosa					4							
	Dillwynia floribunda											1	
	Gompholobium glabratum			1				2				1	
Fabaceae (Faboideae)	Mirbelia rubiifolia							1					
(,	++Pultenaea aristata ▲2V			4								1	1
	Pultenaea stipularis					2							
	Pultenaea tuberculata	1		4			1						
Fabaceae (Mimosoideae)		_					_		1				
Goodeniaceae	Dampiera stricta	2	2	1	2		1	1	1	1			
Haloragaceae	Gonocarpus tetragynus	2	2		_			1	_	1	1	2	
Iridaceae	Patersonia sericea	_	_			1		1		_	_		
Lauraceae	Cassytha glabella	1		1		_		1					2
Lindsaeaceae	Lindsaea linearis	_		_			2	2				3	_
	Lomandra cylindrica	1				2	1			1			
	Lomandra glauca						3	2		_			
Lomandraceae	Lomandra gracilis							_	1				
	Lomandra multiflora					2							
	Lomandra obliqua	4		2	1	_			1		1	3	1
	Angophora hispida	Ė	4	_		5			<u> </u>	6	_	4	_
	Baeckea imbricata		<u> </u>		2	<u> </u>				<u> </u>			
	Darwinia diminuta ▲ 2RCi	1	1		<u> </u>							1	1
	Eucalyptus oblonga	4	<u> </u>			4						$\overline{}$	_
Myrtaceae	Eucalyptus racemosa	Ė				Ė			4				
	Kunzea capitata		1	4	4			2	ŕ	1	3	4	3
	Leptospermum arachnoides		1	<u> </u>	Ļ			<u> </u>	1	Ė	Ť		
	Leptospermum squarrosum	1	4	4	1			2	4	1	4	1	3
	zeprospermam squarrosum	_ +	, →	_ →	_ +				_ ~	-	_ ~	. +	

Swamp 16 – Vegetation cover/abundance

			Tran	sect	1		Trans	sect	2	-	Trans	ect 3	3
Family	Species	S16T1Q1A20	S16T1Q2A20	S16T1Q3A20	S16T1Q4A20	S16T2Q1A20	S16T2Q2A20	S16T2Q3A20	S16T3Q1A20	S16T3Q2A20	S16T3Q3A20	S16T3Q4A20	S16T3Q5A20
	Leptospermum trinervium			4		2	1	1	1				
Orchidaceae	Genoplesium fimbriatum							1					
	Anisopogon avenaceus									1			
Poaceae	Entolasia stricta	1	2					2	2	2			
	Microlaena stipoides										1		
	Banksia ericifolia subsp. ericifolia	4	5	4	4		4	4	5	4	4	4	4
	Grevillea oleoides	1										1	
	Hakea dactyloides	1	1	1				2	4		1	1	
	Hakea teretifolia			4	1				1		5	4	1
Proteaceae	Isopogon anethifolius									1			
	Lambertia formosa			4									
	Persoonia pinifolia			1								1	
	Petrophile pulchella	4		1	1	1	1	3	2		2	1	1
	Petrophile sessilis												1
	Chordifex dimorphus	2		2	4							4	4
Restionaceae	Leptocarpus tenax			1	1								
	Lepyrodia scariosa		3	3	2			1	4	3	3	1	
Rutaceae	Boronia parviflora	1											
Stylidiaceae	Stylidium lineare	3		1	3			2	1			3	2
Xanthorrhoeaceae	Xanthorrhoea resinosa			1	4				2		4	1	1
xanthorrnoeaceae	Xanthorrhoea sp.							1					
Xyridaceae	Xyris gracilis											2	1
TOTAL		24	22	30	22	12	13	25	25	18	18	29	20

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

▲ RoTAP species

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve R: Rare in Australia but does not have an identifiable threat
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- -: reserved population size is not accurately known
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 17 – Vegetation cover/abundance

		Tra	nsec	t 1	Tra	nsec	ct 2					Tra	nsec	t 3			
Family	Species	S17T1Q1A20	S17T1Q2A20	S17T1Q3A20	S17T2Q1A20	S17T2Q2A20	S17T2Q3A20	S17T2Q4A20	S17T2Q5A20	S17T2Q6A20	S17T2Q7A20	S17T3Q1A20	S17T3Q2A20	S17T3Q3A20	S17T3Q4A20	S17T3Q5A20	S17T3Q6A20
	Actinotus minor	2	2	2	2		1				1	1	2	1	1		
	Platysace linearifolia												2		1		
Apiaceae	Xanthosia pilosa	1						1	1							1	
	Xanthosia tridentata									1							
Casuarinaceae	Allocasuarina littoralis	1		1								4					
Colchicaceae	Burchardia umbellata														1		
	Cyathochaeta diandra	1	2									2	1				
	Lepidosperma filiforme	2	1	1			3	2	4	3		4	4		4	2	
Cyperaceae	Lepidosperma neesii					2		2				1	1		1	1	
- /	Ptilothrix deusta	3	4	3	3	3		2	2	3	3		3	2	2	2	3
	Schoenus brevifolius	+	<u> </u>	Ť	Ť			<u> </u>	_	Ť	1		Ť	_	_	<u> </u>	
	Hibbertia riparia				1	2			3		2						
Dilleniaceae	Hibbertia serpyllifolia	1			_			2		2						\vdash	
	Drosera peltata	+			1									2		\vdash	1
Droseraceae	· ·	+		1													<u> </u>
<u> </u>	Drosera spatulata	1		1								3	1				-
Elaeocarpaceae	Tetratheca neglecta ▲3RC-	1	_			4		4	_		_	3	1	4			4
	Epacris microphylla	_	2	1		1	3	1	2		1			1		2	1
	Leucopogon esquamatus	1														\vdash	_
Ericaceae	Leucopogon microphyllus var. microphyllus	2	1	3		2	3				2	1					2
	Monotoca scoparia	2						1				4			1		
	Styphelia tubiflora															1	
	Bossiaea scolopendria						1			1	1					1	
	Daviesia corymbosa			1													
	Dillwynia sp.												1				
Eabaceae (Eabeideae)	Gompholobium glabratum	1		1													
Fabaceae (Faboideae)	Mirbelia rubiifolia		1	1	1			1									
	++Pultenaea aristata ▲ 2V		2		1	1	2		1	1							
	Pultenaea stipularis												4			1	
	Pultenaea tuberculata		2	1													
Fabaceae	Acacia sp.																1
(Mimosoideae)	Acacia suaveolens						1										
Goodeniaceae	Dampiera stricta					1	1		1								
Haloragaceae	Gonocarpus tetragynus							1					2				
Iridaceae	Patersonia sericea														1		
Lauraceae	Cassytha glabella	3							1			1	2		_		
Ladiaceae	Lomandra cylindrica	+							_			_	_		1	\Box	
	Lomandra glauca											3	2				
Lomandraceae	Lomandra gracilis	+			_										2		
	Lomandra obliqua	+		1											2		
	Angophora hispida			1						4			4	5	1	5	
	Baeckea imbricata	+	_	_	2		2	-	_	4	_		4	2	т_		<u> </u>
				_	_		-										_
Myrtaceae	Calytrix tetragona	-	_	2	3	_	1			_	1		_	3			3
	Darwinia diminuta ▲ 2RCi	-				3	-		1			1				\vdash	_
	Eucalyptus oblonga	-				_	4	_				2					<u> </u>
	Eucalyptus sp.	1															

Swamp 17 – Vegetation cover/abundance

		Tra	nsec	t 1	Tra	nsec	t 2					Tra	nsec	t 3			
Family	Species	S17T1Q1A20	S17T1Q2A20	S17T1Q3A20	S17T2Q1A20	S17T2Q2A20	S17T2Q3A20	S17T2Q4A20	S17T2Q5A20	S17T2Q6A20	S17T2Q7A20	S17T3Q1A20	S17T3Q2A20	S17T3Q3A20	S17T3Q4A20	S17T3Q5A20	S17T3Q6A20
	Kunzea capitata	1	3	4	3		1		2	4	3			3		2	1
	Leptospermum arachnoides	1		1			2				4					1	1
	Leptospermum squarrosum		3		4	1	3		1		1						1
	Leptospermum trinervium	2					1						5			1	
Poaceae	Anisopogon avenaceus												1				
	Banksia ericifolia subsp. ericifolia	4	3	4	1	5	5	1	4	4	5	4		4	4	4	
	Banksia marginata			1				5									
	Grevillea oleoides	1		1			1										
	Hakea dactyloides			1									4			1	
Proteaceae	Hakea gibbosa												1				
	Hakea teretifolia									4				4			
	Isopogon anemonifolius	2			1												
	Isopogon anethifolius			1						1							
	Lambertia formosa								4								
	Petrophile pulchella	4	4	4	4	4	3	1	1	2	4	4	1				1
	Chordifex dimorphus		3	3	3		1	2	2	4							
Dartia arang	Chordifex fastigiatus				4	3	1		3		4						
Restionaceae	Empodisma minus																1
	Lepyrodia scariosa			3	3	3	3	3	2		3	2	1	3		2	3
Schizaeaceae	Schizaea bifida	1															
Stylidiaceae	Stylidium lineare	1		1		2	1							1			
Xanthorrhoeaceae	Xanthorrhoea resinosa	4	3	1						2		1	2			4	
TOTAL							22	14	17	14	15	16	20	12	13	16	12

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- -: reserved population size is not accurately known
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

46

47

Valley Side Swamp monitoring sites – Autumn 2020

Swamp 18 – Vegetation cover/abundance

					Tra	ansec	t 1								Trans	sect 2						Tra	ansec	t 3	
Family	Species	S18T1Q1A20	S18T1Q2A20	S18T1Q3A20	S18T1Q4A20	S18T1Q5A20	S18T1Q6A20	S18T1Q7A20	S18T1Q8A20	S18T1Q9A20	S18T2Q1A20	S18T2Q2A20	S18T2Q3A20	S18T2Q4A20	S18T2Q5A20	S18T2Q6A20	S18T2Q7A20	S18T2Q8A20	S18T2Q9A20	S18T2Q10A20	S18T3Q1A20	S18T3Q2A20	S18T3Q3A20	S18T3Q4A20	S18T3Q5A20
Apiaceae	Actinotus minor	2			1			2	1	1	2	1	1	1		1	3	2		2		3			3
Casusiasasas	Allocasuarina distyla	4								1															
Casuarinaceae	Allocasuarina littoralis																1								
Cunoniaceae	Bauera microphylla															3	3	3		4					
	Lepidosperma filiforme							3							1	3			2	2		2		3	4
C	Lepidosperma neesii					2			1								2		1	2					
Cyperaceae	Ptilothrix deusta		2	3	3	2	1	3	2	2	3	3	3	2	2	3	2	2	2	2	3	3	3	1	2
	Schoenus brevifolius				1												2								1
Dillaniana	Hibbertia riparia		1	2	1				3	3			1		1							2			
Dilleniaceae	Hibbertia serpyllifolia	4		1				2			2		1												
Droseraceae	Drosera peltata							1				2			1	1			1			1	1		
	Epacris microphylla	2	1			1		2		2	2		1	2		3		2		1	3	2	1	3	3
Educati	Epacris obtusifolia							1									2	2		2					
Ericaceae	Leucopogon esquamatus																			2				2	
	Leucopogon microphyllus var. microphyllus	1	1	2	3			1	4	1	2	1	3	2						1	3	3	1		
	Bossiaea scolopendria																							1	
Fabaceae (Faboideae)	Gompholobium glabratum												1											1	
	++Pultenaea aristata ▲ 2V						2	2	1	1	1		1	2		1				4		2	1	2	1
Fabaceae (Mimosoideae)	Acacia sp.																				1	1			
Goodeniaceae	Dampiera stricta						1			1			1							3		1			
Haloragaceae	Gonocarpus teucrioides																								1
Lauraceae	Cassytha glabella				1		1		1								1	1						2	
Lomandraceae	Lomandra obliqua										1														
	Baeckea imbricata			2	4	1	2	4	2	3	2	2	2	2	3		1	3	3	1		3	2		
N. A. water a series	Callistemon citrinus																			4					
Myrtaceae	Calytrix tetragona			2							3	1	1		1										
	Corymbia gummifera	1							4																\Box

Swamp 18 – Vegetation cover/abundance

					Tra	ansec	t 1								Trans	ect 2	2					Tra	nsec	t 3	
Family	Species	S18T1Q1A20	S18T1Q2A20	S18T1Q3A20	S18T1Q4A20	S18T1Q5A20	S18T1Q6A20	S18T1Q7A20	S18T1Q8A20	S18T1Q9A20	S18T2Q1A20	S18T2Q2A20	S18T2Q3A20	S18T2Q4A20	S18T2Q5A20	S18T2Q6A20	S18T2Q7A20	S18T2Q8A20	S18T2Q9A20	S18T2Q10A20	S18T3Q1A20	S18T3Q2A20	S18T3Q3A20	S18T3Q4A20	S18T3Q5A20
	Darwinia diminuta ▲ 2RCi								1		1	1													
	Kunzea capitata	4	1	3	4	4	4	4	4	4	3	4	4	3	4			3	1	1	3	3		1	3
	Leptospermum arachnoides			1				1		1		1	1												
	Leptospermum squarrosum	2	1		1	1	4	4	4	1	1		1	1	1	5	5	2	4	4	3	4	1	4	4
	Leptospermum trinervium										1														
Poaceae	Entolasia stricta																			1					
	Banksia ericifolia subsp. ericifolia	2	4	4	5	4	4	5	5	2	4		4	4	4	4	4	2	4	4	4	4	4	4	5
	Banksia oblongifolia						4						1												
	Hakea dactyloides	2			1				4																
Proteaceae	Hakea gibbosa			4	1												1								
	Hakea teretifolia	2				1	2	1	1	1	1			1	1	4			1		5	1	1	4	
	Isopogon anethifolius		1	4	1																1			1	1
	Petrophile pulchella	1	4	4	4	1			1	2	4	4	3	4	2	1	4	1	1	3	1	3	1	1	
	Baloskion gracile										1														
	Chordifex dimorphus	3	3	3			2				2														
Dastianasas	Chordifex fastigiatus		2	4	4	3	4	3	4	4	3	3	4	4	3	3	4	4	3	4	4	3	3		
Restionaceae	Empodisma minus															4	3				1				
	Leptocarpus tenax																						1		
	Lepyrodia scariosa			2	1	2		3	1	3	2	3	2	1	2	3	2	3	3	3		2	1	2	3
Stylidiaceae	Stylidium lineare							1		1	1	1	1	1				2	1						
Xanthorrhoeaceae	Xanthorrhoea resinosa		1	1	1	1		1	1	2		1				3	4	1		2	1			1	
TOTAL		13	12	16	17	12	12	19	19	19	21	14	20	14	13	15	17	15	13	21	13	18	13	16	12

Cover Abundance Scale (Modified Braun Blanquet):

1 = cover less than 5% of site and rare

2 = cover less than 5% of site and uncommon

= cover less than 5% of site and uncommo

3 = cover of less than 5% and common

4 = cover of 5-20% of site

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)

5 = cover of 21-50% of site

6 = cover of 51-75% of site

7 = cover of greater than 75%

⁺⁺ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 24 – Vegetation cover/abundance

			1	rans	ect	1			Tra	nse	ct 2		1	Frans	sect	3
Family	Species	S24T1Q1A20	S24T1Q2A20	S24T1Q3A20	S24T1Q4A20	S24T1Q5A20	S24T1Q6A20	S24T2Q1A20	S24T2Q2A20	S24T2Q3A20	S24T2Q4A20	S24T2Q5A20	S24T3Q1A20	S24T3Q2A20	S24T3Q3A20	S24T3Q4A20
	Laxmannia gracilis	0,	S	V)	<i>V</i> 3	S	<i>V</i> 3	<i>V</i> 3	<i>V</i> 3	S	65	S	S	S	<i>-</i> 6 1	2
Anthericaceae	Thysanotus juncifolius									1						
	Actinotus minor		2	2		2										1
Apiaceae	Platysace linearifolia				1			3								
	Xanthosia tridentata															1
Casuarinaceae	Allocasuarina littoralis										1					
	Bauera microphylla				3	3			2	2						
Cunoniaceae	Bauera rubioides			3	2						3					
	Lepidosperma filiforme					3			2	4	4			2	2	1
	Lepidosperma neesii			1							3	4		1		2
Cyperaceae	Ptilothrix deusta	3	3	3	3		3	3	2	2	3	3		2		
	Schoenus brevifolius		3		1	3	3				1	3				
	Schoenus ericetorum															2
Dilleniaceae	Hibbertia serpyllifolia	4	1					1								
	Drosera peltata		1						1					2	1	
Droseraceae	Drosera spatulata						1				3					
	Epacris microphylla	2	1	2		1		2	1				3		4	1
	Epacris obtusifolia	2		1	2	3	3	2	2	3	1	1				
	Leucopogon amplexicaulis							1								
Ericaceae	Leucopogon esquamatus												1			
	Leucopogon microphyllus var. microphyllus	2											2	1	2	1
	Sprengelia incarnata										1					
	Gompholobium glabratum		1					2								
Fabaceae	Gompholobium sp.	1	Ī					<u> </u>								
(Faboideae)	Mirbelia rubiifolia	+-			1				1		1	1				
(,	Pultenaea tuberculata	1	1		_			1	_		-	-				
Fabaceae	Acacia myrtifolia		<u> </u>			1		_								
(Mimosoideae)	Acacia suaveolens					-										4
Goodeniaceae	Dampiera stricta	1	2	2	3	3	1	3	1	1						1
Lauraceae	Cassytha glabella	1	2				1		2	1						
Lindsaeaceae	Lindsaea linearis	3	_		2		_	1		_						
Lindsdeddedd	Lomandra cylindrica							_								1
Lomandraceae	Lomandra glauca															1
Lomanaraceae	Lomandra obliqua												1		1	2
	Baeckea imbricata	2	4	3	2	3	4		2	4	4	4	-	3	1	
	Corymbia gummifera		-				_	5		-	-	-		, J	_	4
	Darwinia diminuta ▲ 2RCi														1	
Myrtaceae	Eucalyptus haemastoma	+		_	_		_	5	_						1	
iviyi taceae		3	4	_	2	1	3	3	1	3	3	1	2	4	4	
	Kunzea capitata Leptospermum arachnoides	1	1			1				4	3	1		1	3	
		1	1	4	3	3	4	4	4	1	5	4		1	1	1
Orchidacaaa	Cruptostylis gracta	+	1	4		3	-4	4	4	<u> </u>	٥	4	1	1		<u> </u>
Orchidaceae	Cryptostylis erecta	1		_	_	_	_	_	_	_	_		1		_	
Poaceae	Entolasia stricta	2				1										2
Duntan	Tetrarrhena turfosa	+-	-	_	_	1		_	_	_	_	-	_	_	_	_
Proteaceae	Banksia ericifolia subsp. ericifolia	5	5	5	5	5	4	5	4	4	5	5	4	4	4	2

Swamp 24 – Vegetation cover/abundance

			1	rans	ect :	1			Tra	nse	ct 2		1	rans	ect 3	3
Family	Species	S24T1Q1A20	S24T1Q2A20	S24T1Q3A20	S24T1Q4A20	S24T1Q5A20	S24T1Q6A20	S24T2Q1A20	S24T2Q2A20	S24T2Q3A20	S24T2Q4A20	S24T2Q5A20	S24T3Q1A20	S24T3Q2A20	S24T3Q3A20	S24T3Q4A20
	Banksia oblongifolia			3		3			1	1						
	Grevillea oleoides														1	1
	Hakea teretifolia	4	4	4	4	3	4	4	1	4	4	2	4			
	Isopogon anemonifolius		1													
	Petrophile pulchella									1	1	1		1		
	Symphionema paludosum							1		1	1					
	Baloskion gracile	4	3			1		1	4				1			
	Chordifex dimorphus							4								
Bti	Chordifex fastigiatus					4			2	4	5	3	3	3	1	
Restionaceae	Empodisma minus	3	4	5	4	4	4	5	3	2	2					
	Leptocarpus tenax	3	2	2	3	1	2	1	3			2				
	Lepyrodia scariosa		2				2	2		1	1		3		2	1
Rhamnaceae	Cryptandra ericoides		1													
Selaginellaceae	Selaginella uliginosa				1	1		2								
Stylidiaceae	Stylidium lineare	3	1	3	2			3	3	1	3	1	2	3	3	
Xanthorrhoeaceae	Xanthorrhoea resinosa	1	1			2			1	1	2		1	1		2
Xyridaceae	Xyris gracilis		1	3				3	1							
TOTAL		22	25	16	18	21	14	25	22	21	22	14	13	14	15	20

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- R: Rare in Australia but does not have an identifiable threat
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- i: less than 1000 plants are known to occur within a conservation reserve(s)

Swamp 25 – Vegetation cover/abundance

					Trans	sect 1					Tran	sect 2			Т	ransect	3	
Family	Species	S25T1Q1A20	S25T1Q2A20	S25T1Q3A20	S25T1Q4A20	S25T1Q5A20	S25T1Q6A20	S25T1Q7A20	S25T1Q8A20	S25T2Q1A20	S25T2Q2A20	S25T2Q3A20	S25T2Q4A20	S25T3Q1A20	S25T3Q2A20	S25T3Q3A20	S25T3Q4A20	S25T3Q5A20
Apiaceae	Actinotus minor	1	2							1	1							
Casuarinaceae	Allocasuarina distyla				1				1	1		1						
Colchicaceae	Burchardia umbellata	1		3				1					2					
Companiana	Bauera microphylla	2	4	3						1			3					
Cunoniaceae	Bauera rubioides											1						
	Cyathochaeta diandra									1	3		1					
	Lepidosperma filiforme				1	1						2	4					
Cyperaceae	Lepidosperma neesii			3											2	2	3	2
	Ptilothrix deusta	3	3	3			3	3	1	3	3		3	3		2		
	Schoenus brevifolius				2	3	1	3	1		2		1				2	4
Dilleniaceae	Hibbertia serpyllifolia	2								2	2			3				
D	Drosera peltata						1		1		1		3					
Droseraceae	Drosera spatulata								1									
Education	Epacris microphylla	2	1				2			2			1					
Ericaceae	Epacris obtusifolia		1	2		2		2	1			1	1					
F-b (F-b-:d)	Dillwynia floribunda	1		3		1				1								2
Fabaceae (Faboideae)	++Pultenaea aristata ▲ 2V											1	1					
Goodeniaceae	Dampiera stricta							1		1	1	1	1					
Lauraceae	Cassytha glabella							1				1						
	Baeckea imbricata		2			3	4	4	3		2	3	3					2
	Corymbia gummifera									1								
	Eucalyptus luehmanniana ▲ 2RCa	1	1							1								
	Eucalyptus racemosa													5	1			
Myrtaceae	Kunzea capitata	1	2							2	1	3						
	Leptospermum arachnoides					1					2	1						
	Leptospermum squarrosum	1	4	3	4	4	5	3	4	3		4	2		4	4	4	4
	Leptospermum trinervium									1								
Poaceae	Entolasia stricta													2	3		1	

Swamp 25 – Vegetation cover/abundance

					Trans	sect 1					Trans	sect 2			Т	ransect	3	
Family	Species	S25T1Q1A20	S25T1Q2A20	S25T1Q3A20	S25T1Q4A20	S25T1Q5A20	S25T1Q6A20	S25T1Q7A20	S25T1Q8A20	S25T2Q1A20	S25T2Q2A20	S25T2Q3A20	S25T2Q4A20	S25T3Q1A20	S25T3Q2A20	S25T3Q3A20	S25T3Q4A20	S25T3Q5A20
	Banksia ericifolia subsp. ericifolia	5	5	4	5	5	5	5	4	4		4	5	5	5	4	2	4
	Hakea teretifolia	1		2	1	4	3	4	4	4		4	4	4		3	4	3
Proteaceae	Lambertia formosa													1				
	Persoonia pinifolia	1								2			1	4				
	Petrophile pulchella	5	4	4	4	1	2	1	1		1	2		4	1	1	2	2
	Chordifex dimorphus		1							1			3					
	Chordifex fastigiatus					3	4	3	2		3	4	3					
Restionaceae	Empodisma minus	2	3	3	2				1	3				3	2	2	3	3
	Leptocarpus tenax	3								2			2	2				1
	Lepyrodia scariosa		2			2			2		1	3	3	2				3
Stylidiaceae	Stylidium lineare		3	1						1		1	3					
Xanthorrhoeaceae	Xanthorrhoea resinosa	1	4	1				1		1	3	2	1	4	1	1		
TOTAL		17	16	13	8	12	10	13	14	22	14	18	22	13	8	8	8	11

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- a: 1000 plants or more are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 101 – Vegetation cover/abundance

					•	Tran	sect	1							Tra	ansed	t 2								Tra	anse	ct 3				
Family	Species	S101T1Q1A20	S101T1Q2A20	S101T1Q3A20	S101T1Q4A20	S101T1Q5A20	S101T1Q6A20	S101T1Q7A20	S101T1Q8A20	S101T1Q9A20	S101T1Q10A20	S101T2Q1A20	S101T2Q2A20	S101T2Q3A20	S101T2Q4A20	S101T2Q5A20	S101T2Q6A20	S101T2Q7A20	S101T2Q8A20	S101T2Q9A20	S101T3Q1A20	S101T3Q2A20	S101T3Q3A20	S101T3Q4A20	S101T3Q5A20	S101T3Q6A20	S101T3Q7A20	S101T3Q8A20	S101T3Q9A20	S101T3Q10A20	S101T3Q11A20
Anthericaceae	Thysanotus juncifolius					Ĭ																	1			2					
Aninana	Actinotus minor												1	1	2	2	1				2					2					1
Apiaceae	Platysace linearifolia												1																		
Casuarinaceae	Allocasuarina littoralis													1							4										
Colchicaceae	Burchardia umbellata					1				1										1										1	
	Bauera microphylla									2	1			2						3						1	1	1	1		
Cunoniaceae	Bauera rubioides	1													2																
	Chorizandra cymbaria											1																			
	Cyathochaeta diandra	1	3								1			4	4	2	4	4	4	3	3							1			
	Lepidosperma filiforme										4		3																П	П	
Cyperaceae	Lepidosperma neesii	3	4	3	4	4	3	4	4	4	3	3		4	3	3	4	3	4	4	4	3	4	4	3	4	3	3	3	3	4
	Ptilothrix deusta		3	3	4	3	3	3	3	4	2		3	4	3	3	5	3	3	4	4	2		4	2	3	3	3	3	3	3
	Schoenus brevifolius	2			3	3	3	4	3	3	2	3	3		3	3			3	1			3	2	2	3	3	2	1	1	3
Dilleniaceae	Hibbertia serpyllifolia																				1										
Droseraceae	Drosera peltata								1		1	3	2				1														2
	Epacris microphylla	1																2	2	1	1	2									
Ericaceae	Epacris obtusifolia													1		2	2			2		2		2		2	1			2	
	Dillwynia floribunda										1																				
Fabaceae (Faboideae)	Mirbelia rubiifolia													1														1			1
	++Pultenaea aristata ▲ 2V																	1													
Goodeniaceae	Dampiera stricta													1				1			2					1					2
Lauraceae	Cassytha glabella			1		1			1		1		2	2	1	2	1	2		3	2			3		1			1	1	1
Lindsaeaceae	Lindsaea linearis												1		2					2											
	Baeckea imbricata				1	2	4	2	2	1			2	1	3			1	2		1	2		2					4	4	4
N.A. unta a a a a	Eucalyptus oblonga		1																												
Myrtaceae	Leptospermum arachnoides												1																		
	Leptospermum squarrosum	3	4	3	5	5	4	4	4	4	3	5	5	4	3	5	4	4	5	4	4	3	4	5	4	4	4	4	6	3	4

Swamp 101 – Vegetation cover/abundance

					7	Frans	sect	1							Tra	anse	t 2								Tra	anse	ct 3				
Family	Species	S101T1Q1A20	S101T1Q2A20	S101T1Q3A20	S101T1Q4A20	S101T1Q5A20	S101T1Q6A20	S101T1Q7A20	S101T1Q8A20	S101T1Q9A20	S101T1Q10A20	S101T2Q1A20	S101T2Q2A20	S101T2Q3A20	S101T2Q4A20	S101T2Q5A20	S101T2Q6A20	S101T2Q7A20	S101T2Q8A20	S101T2Q9A20	S101T3Q1A20	S101T3Q2A20	S101T3Q3A20	S101T3Q4A20	S101T3Q5A20	S101T3Q6A20	S101T3Q7A20	S101T3Q8A20	S101T3Q9A20	S101T3Q10A20	S101T3Q11A20
Orchidaceae	Genoplesium fimbriatum												1							Ĭ											
	Anisopogon avenaceus												2		1	1			1												
Poaceae	Entolasia stricta			1		2										1		2	1						1	2		1			
	Tetrarrhena turfosa															1										1					
	Banksia ericifolia subsp. ericifolia	5	4	5	5	4	5	5	4	5	3	4	5	4	3	5	5	4	4	4	5	5	5	6	4	5	5	4	6	5	5
	Banksia oblongifolia			1			2																								
Proteaceae	Hakea teretifolia	4	4	3	4	3	5	4	4	3	3	3	3		4	3	4	3	3	4	3	3	3	1	4	3	4	4	2		1
	Persoonia pinifolia												1																		
	Petrophile pulchella	3	1	3	2	2	3	2		3	4	1	3	4	5	3	3	2	3	4	4	4	4		1	3	1	1			
	Empodisma minus	3			1							1	3												2			2			
Restionaceae	Leptocarpus tenax	1		3	2	2	2	2	3	2				3		3	2			2	2		2	4	1		2			1	1
	Lepyrodia scariosa	1	1	2		4			2	2		2	4	3	2	2	2	3	2	2	3	2	3	3	3	1	2	3	2		4
Rutaceae	Boronia parviflora																													1	
Stylidiaceae	Stylidium lineare						1					2	2	1	3		3		1											2	
Thymelaeaceae	Pimelea linifolia					1																									
Xanthorrhoeaceae	Xanthorrhoea resinosa					1							2		1			1	1	4		1	2					1			
TOTAL		12	9	11	10	15	11	9	11	12	13	11	21	17	17	16	14	15	15	17	16	11	10	11	11	16	11	14	10	12	14

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

RoTAP species:

- 2: Geographic range in Australia less than 100 km
- V: Taxon not presently Endangered, but at risk over a longer period
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 111a – Vegetation cover/abundance

			Т	rans	sect	1			Tra	nsed	t 2			Tra	nse	ct 3	
Family	Species	S111aT1Q1A20	S111aT1Q2A20	S111aT1Q3A20	S111aT1Q4A20	S111aT1Q5A20	S111aT1Q6A20	S111aT2Q1A20	S111aT2Q2A20	S111aT2Q3A20	S111aT2Q4A20	S111aT2Q5A20	S111aT3Q1A20	S111aT3Q2A20	S111aT3Q3A20	S111aT3Q4A20	S111aT3Q5A20
	Actinotus minor		3	3			2	3					2				
Apiaceae	Platysace linearifolia	1					2						3				
	Xanthosia pilosa							2									
Casuarinaceae	Allocasuarina littoralis								1								
Colchicaceae	Burchardia umbellata							2									
Cunoniaceae	Bauera microphylla															2	2
	Cyathochaeta diandra	3	2					2					3	1		2	
	Lepidosperma filiforme													2			
Cyperaceae	Lepidosperma neesii			2	3		3	3	4	2	2	4	3	1			3
	Ptilothrix deusta	3	3	3	2			3	4	2			3	2	4	2	4
	Schoenus brevifolius				2				3	3	2	3			3	2	2
Dilleniaceae	Hibbertia riparia	2		1									2				
Droseraceae	Drosera peltata				2						1						
	Epacris microphylla	3	3	2	2	1	2						2	1			\vdash
	Epacris obtusifolia	+				1							2	2		2	
Ericaceae	Leucopogon esquamatus			3	2								_	_		_	\vdash
	Leucopogon microphyllus var. microphyllus	2		2													
	Hovea linearis							1									
Fabaceae (Faboideae)	Mirbelia rubiifolia						1						1				\vdash
,	++Pultenaea aristata ▲ 2V			1									1				\vdash
Fabaceae (Mimosoideae)	Acacia myrtifolia				1												
Goodeniaceae	Dampiera stricta			1										1			\vdash
Lauraceae	Cassytha glabella	1	3	1				1									\vdash
Lindsaeaceae	Lindsaea linearis												1				\vdash
Lomandraceae	Lomandra obliqua							1									\vdash
	Baeckea imbricata		2		1	1		_	2	2			1	3	2	2	1
	Corymbia gummifera		_		-			1	_	_			_		_	_	H
	Darwinia diminuta ▲ 2RCi			1				_									\vdash
	Eucalyptus haemastoma			-								4					\vdash
Myrtaceae	Eucalyptus sieberi						5					_	4				\vdash
	Leptospermum arachnoides	2	1	1		1								1			\vdash
	Leptospermum squarrosum	-	_	-	1	1	4		5	4	4	4		2	4	2	4
	Leptospermum trinervium				-	1	_	1			_	_	4		-		-
	Genoplesium fimbriatum				1	_							-				\vdash
Orchidaceae	Microtis sp.				1	\vdash											\vdash
Doggoog	Entolasia stricta		1		1	\vdash	3	3									\vdash
Poaceae	Banksia ericifolia subsp.		1			\vdash	3	3									\vdash
	ericifolia	5	2	4	4	1	4	5	4		4	4	5	4	4	4	4
	Banksia oblongifolia		2	1										2			
	Banksia serrata	1					1										\vdash
Proteaceae	Grevillea oleoides	+			2	\vdash	\exists	\vdash									\vdash
	Hakea gibbosa	1	1	4	3	\vdash	1	\vdash		1			2				\vdash
		+-		-	_	\vdash	-	_	_		_	H-			_	4	1
	Hakea teretifolia		3	7	1	フリ		1 1				4					
	Hakea teretifolia Petrophile pulchella	4	3 5	3	4	4	4	4	3	3	2	4	3	3	3	-	3

Swamp 111a – Vegetation cover/abundance

			Т	rans	ect	1			Tra	nsed	:t 2			Tra	nsed	:t 3	
Family	Species	S111aT1Q1A20	S111aT1Q2A20	S111aT1Q3A20	S111aT1Q4A20	S111aT1Q5A20	S111aT1Q6A20	S111aT2Q1A20	S111aT2Q2A20	S111aT2Q3A20	S111aT2Q4A20	S111aT2Q5A20	S111aT3Q1A20	S111aT3Q2A20	S111aT3Q3A20	S111aT3Q4A20	S111aT3Q5A20
	Chordifex dimorphus												1	3			
	Chordifex fastigiatus		5	4	3	4	2		2	3	3	2		3		1	2
	Empodisma minus						3	3	4				1		4	3	4
	Leptocarpus tenax	3															
	Lepyrodia scariosa	3			2		2	2	2	1	1	3	3				
Santalaceae	Leptomeria acida												4				
Xanthorrhoeaceae	Xanthorrhoea resinosa	4	4	4		2	4	4					4				
TOTAL		16	15	19	18	11	16	18	12	10	9	8	22	15	8	11	11

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 125 – Vegetation cover/abundance

				Tr	ranse	ct 1						Trans	sect 2							Tra	ansec	t 3			
Family	Species	S125T1Q1A20	S125T1Q2A20	S125T1Q3A20	S125T1Q4A20	S125T1Q5A20	S125T1Q6A20	S125T1Q7A20	S125T2Q1A20	S125T2Q2A20	S125T2Q3A20	S125T2Q4A20	S125T2Q5A20	S125T2Q6A20	S125T2Q7A20	S125T2Q8A20	S125T3Q1A20	S125T3Q2A20	S125T3Q3A20	S125T3Q4A20	S125T3Q5A20	S125T3Q6A20	S125T3Q7A20	S125T3Q8A20	S125T3Q9A20
Anthericaceae	Thysanotus juncifolius				2																				
A:	Actinotus minor	2		1	2		2	1			1		1	3	1	1	2				3	1	3		1
Apiaceae	Platysace linearifolia		2				3	1																	
Carraninasasas	Allocasuarina distyla	1													4		4								
Casuarinaceae	Allocasuarina littoralis								1																
Colchicaceae	Burchardia umbellata															1									
Cunoniaceae	Bauera microphylla				4									1											
	Chorizandra cymbaria										1									1					
	Cyathochaeta diandra			3				3							1	3	3					2	3	3	2
	Gahnia sieberiana										1														
Cyperaceae	Lepidosperma filiforme	1		4	3		3	3	2	4	3	3	2							3			1		
	Lepidosperma neesii	2				2			2	2			1	3		2	2				3	4			
	Ptilothrix deusta	2	2	2	3	3							2	4	2	2	3	4	2		4	4	3	3	3
	Schoenus brevifolius									3	3	3							1	2					
D.II .	Hibbertia riparia							1																	
Dilleniaceae	Hibbertia serpyllifolia			1												2	2								
	Epacris microphylla				3			2					1		1	1	1							3	1
	Epacris obtusifolia							1		1	3														
Ericaceae	Leucopogon esquamatus	1			2																				
Littaceae	Leucopogon microphyllus var. microphyllus	1		1			3	2								1									1
	Sprengelia incarnata														1							2			
	Dillwynia floribunda	1		1	3		1			3		2					1			3			1		
Fabaceae (Faboideae)								1																	
	Pultenaea tuberculata							1																	1
Goodeniaceae	Dampiera stricta							2			1					1	1								1
Haloragaceae	Gonocarpus tetragynus													1		1									
Lauraceae	Cassytha glabella	1	1		1			1		1			1	1		1	2				2			1	

Swamp 125 – Vegetation cover/abundance

				Tı	ranse	ct 1						Tran	sect 2	2						Tr	ansec	t 3			
Family	Species	S125T1Q1A20	S125T1Q2A20	S125T1Q3A20	S125T1Q4A20	S125T1Q5A20	S125T1Q6A20	S125T1Q7A20	S125T2Q1A20	S125T2Q2A20	S125T2Q3A20	S125T2Q4A20	S125T2Q5A20	S125T2Q6A20	S125T2Q7A20	S125T2Q8A20	S125T3Q1A20	S125T3Q2A20	S125T3Q3A20	S125T3Q4A20	S125T3Q5A20	S125T3Q6A20	S125T3Q7A20	S125T3Q8A20	S125T3Q9A20
Lindsaeaceae	Lindsaea linearis							1								1	1					2			3
Loganiaceae	Mitrasacme polymorpha															1									
Lomandraceae	Lomandra obliqua	2					2							1	1										
	Angophora costata							1																	
	Angophora hispida		1				1																		
	Baeckea imbricata		1	4	1	2			1	4	2			2						2					
	Darwinia diminuta ▲ 2RCi				1		2							1	1	1									
Myrtaceae	Darwinia fascicularis				2																				
	Eucalyptus racemosa																1							4	4
	Leptospermum arachnoides		2	1	1								1			4									
	Leptospermum squarrosum	1	4	1	2	5			4	5	4	4	4	4	4	4	3	4	3	4	4	4	4	4	
	Leptospermum trinervium	1						1																	
D	Anisopogon avenaceus						1																		
Poaceae	Entolasia stricta																2								
	Banksia ericifolia subsp. ericifolia	5	5	5	5	3	3	5	4	5	5	5	4	5		4	4	5	4	5	5	5	4	5	5
	Banksia marginata						6	1																	
	Banksia oblongifolia	1	1		3																				
	Hakea dactyloides						1								5										
Doctor	Hakea gibbosa		1	1	1	1	1			1													1	1	
Proteaceae	Hakea teretifolia	1	1	1		1		1	1	4	1	3		3	1	1	4		1	1	2	4	4		1
	Isopogon anethifolius	4	2	4	4	2	2	1	1		2	2		2	2	1	3	1		1	4	3	3		4
	Lomatia silaifolia						1																		
	Persoonia pinifolia						4									1								1	
	Petrophile pulchella					2	1	4	1	1		1			2	4	4	4							
	Chordifex dimorphus						4	4							5										
Restionaceae	Chordifex fastigiatus	2		4	4	4	4	3	2	4	3	3	2	4	4	3							3		
	Empodisma minus								2	3							3	4	2	3	3	1	2		

Swamp 125 – Vegetation cover/abundance

				Tr	ranse	ct 1						Trans	ect 2							Tra	ansec	t 3			
Family	Species	S125T1Q1A20	S125T1Q2A20	S125T1Q3A20	S125T1Q4A20	S125T1Q5A20	S125T1Q6A20	S125T1Q7A20	S125T2Q1A20	S125T2Q2A20	S125T2Q3A20	S125T2Q4A20	S125T2Q5A20	S125T2Q6A20	S125T2Q7A20	S125T2Q8A20	S125T3Q1A20	S125T3Q2A20	S125T3Q3A20	S125T3Q4A20	S125T3Q5A20	S125T3Q6A20	S125T3Q7A20	S125T3Q8A20	S125T3Q9A20
	Leptocarpus tenax	2			1		1	1								1	3			1			2	1	1
	Lepyrodia scariosa			2	1		1		2	3	2	2	2			2	2	1	2	2				2	3
Selaginellaceae	Selaginella uliginosa							2																	
Stylidiaceae	Stylidium lineare			3			1	1						2											1
Xanthorrhoeaceae	Xanthorrhoea resinosa				5	1			1		1		1	2	1	4					2		1		
TOTAL		18	12	17	22	11	22	25	13	15	15	10	12	16	16	25	21	7	7	12	10	11	14	11	15

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- i: less than 1000 plants are known to occur within a conservation reserve(s)

Species which recorded an increase in average cover/abundance (from spring 2019)

Longwall and Control Sites	Longwall Sites Only	Control Sites Only
	Acacia suaveolens	-
Actinotus minor		Allocasuarina distyla
Banksia ericifolia subsp. ericifolia	Angophora hispida	Allocasuarina littoralis
Burchardia umbellata	Bauera microphylla	Baeckea imbricata
Cassytha glabella	Bauera rubioides	Banksia oblongifolia
Chordifex fastigiatus	Chordifex dimorphus	Darwinia fascicularis
Dampiera stricta	Corymbia gummifera	Dillwynia floribunda
Entolasia stricta	Darwinia diminuta ▲ 2RCi	Eucalyptus sieberi
Epacris obtusifolia	Daviesia corymbosa	Grevillea oleoides
Hakea teretifolia	Drosera peltata	Platysace linearifolia
Lepidosperma neesii	Empodisma minus	Xanthosia pilosa
Leptocarpus tenax	Eucalyptus oblonga	
Leptospermum arachnoides	Gompholobium glabratum	
Leptospermum trinervium	Gonocarpus tetragynus	
Leucopogon esquamatus	Hakea dactyloides	
Lindsaea linearis	Hakea gibbosa	
Lomandra obliqua	Hibbertia serpyllifolia	
Petrophile pulchella	Isopogon anemonifolius	
Ptilothrix deusta	Kunzea capitata	
Schoenus brevifolius	Lepidosperma filiforme	
Stylidium lineare	Lepyrodia scariosa	
Xanthorrhoea resinosa	Leucopogon microphyllus var. microphyllus	
	Lomandra glauca	
	++Pultenaea stipularis ▲ 2V	
	Pultenaea tuberculata	
	Schoenus ericetorum	
	Xanthosia tridentata	
	Xyris gracilis	

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Species which recorded a decrease in average cover/abundance (from spring 2019)

Longwall and Control Sites	Longwall Sites Only	Control Sites Only
		Control Sites Only
Actinotus minor	Allocasuarina distyla	Anisopogon avenaceus
Baeckea imbricata	Angophora hispida	Bauera microphylla
Banksia ericifolia subsp. ericifolia	Baloskion gracile	Bauera rubioides
Banksia marginata	Boronia parviflora	Darwinia diminuta ▲ 2RCi
Banksia oblongifolia	Bossiaea scolopendria	Gonocarpus tetragynus
Chordifex dimorphus	Calytrix tetragona	Hakea gibbosa
Chordifex fastigiatus	Corymbia gummifera	Leptospermum trinervium
Cyathochaeta diandra	Dampiera stricta	Tetrarrhena turfosa
Empodisma minus	Dillwynia floribunda	
Entolasia stricta	Drosera peltata	
Epacris microphylla	Eucalyptus oblonga	
Epacris obtusifolia	Grevillea oleoides	
Eucalyptus racemosa	Hibbertia riparia	
Hakea dactyloides	Kunzea capitata	
Hakea teretifolia	Leptocarpus tenax	
Hibbertia serpyllifolia	Lepyrodia scariosa	
Isopogon anethifolius	Leucopogon esquamatus	
Lepidosperma filiforme	Leucopogon microphyllus var. microphyllus	
Lepidosperma neesii	Lomandra cylindrica	
Leptospermum arachnoides	Lomandra glauca	
Leptospermum squarrosum	Lomandra obliqua	
Lepyrodia scariosa	Patersonia sericea	
Leucopogon esquamatus	Platysace linearifolia	
Leucopogon microphyllus var. microphyllus	Ptilothrix deusta	
Mirbelia rubiifolia	++Pultenaea aristata ▲ 2V	
Persoonia pinifolia	Sprengelia incarnata	
Petrophile pulchella	Stylidium lineare	
Schoenus brevifolius	Thysanotus juncifolius	
Xanthorrhoea resinosa	Xanthosia pilosa	

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

E3: Vegetation condition – Valley side swamps

Swamp 16 – Vegetation condition

			Tran	sect :	L	Tra	nsec	t 2		Tra	nsec	t 3	
Family	Species	S16T1Q1A20	S16T1Q2A20	S16T1Q3A20	S16T1Q4A20	S16T2Q1A20	S16T2Q2A20	S16T2Q3A20	S16T3Q1A20	S16T3Q2A20	S16T3Q3A20	S16T3Q4A20	S16T3Q5A20
Anthericaceae	Thysanotus juncifolius		5										
	Actinotus minor	5	5	5	5		5	5	5			5	
	Platysace linearifolia								5		5	5	
Apiaceae	Xanthosia pilosa						5		5				
	Xanthosia tridentata											5	5
Casuarinaceae	Allocasuarina littoralis		5		5							5	
Colchicaceae	Burchardia umbellata							5					
	Cyathochaeta diandra			5						5			
	Lepidosperma filiforme	5	5	5	4				5		5	5	5
	Lepidosperma laterale					5	5						
Cyperaceae	Lepidosperma neesii	5	5	5						5	5		
	Ptilothrix deusta	5	5	5	5	5	5	5	5	5	5	5	5
	Schoenus brevifolius		5	5	5				5	5			5
Dilleniaceae	Hibbertia serpyllifolia	5	5	5	5					5			
Droseraceae	Drosera peltata	5	5	5	5								
Elaeocarpaceae	Tetratheca neglecta ▲3RC-					5			5	5			
P	Epacris microphylla		5	5	5			5	5	3	5	5	4
	Leucopogon esquamatus						4	5			5		
Ericaceae	Leucopogon microphyllus var. microphyllus	5	5	5	5			5	5		5		5
	Styphelia tubiflora											5	
	Daviesia corymbosa					3							
	Dillwynia floribunda											5	
	Gompholobium glabratum			5				5				5	
Fabaceae (Faboideae)	Mirbelia rubiifolia							3					
	++Pultenaea aristata ▲ 2V			5								5	4
	Pultenaea stipularis			Ť		5							
	Pultenaea tuberculata	5		4			5						
Fabaceae (Mimosoideae)	Acacia suaveolens								5				
Goodeniaceae	Dampiera stricta	5	5	5	5		5	5	5	5			
Haloragaceae	Gonocarpus tetragynus	5	5	Ť				5		5	5	5	
Iridaceae	Patersonia sericea					5		5					
Lauraceae	Cassytha glabella	5		5				5					5
Lindsaeaceae	Lindsaea linearis						5	5				5	
	Lomandra cylindrica	5				5	5			5			
	Lomandra glauca	+					5	5					
Lomandraceae	Lomandra gracilis								5				
	Lomandra multiflora					5							
	Lomandra obliqua	3		5	5				5		5	5	5
	Angophora hispida		5	, ,		5				5	Ť	5	
	Baeckea imbricata				5								
	Darwinia diminuta ▲ 2RCi	5	5									5	5
Myrtaceae	Eucalyptus oblonga	5				5							
iviyitaccac	Eucalyptus racemosa					,			5			-	
	Kunzea capitata		5	5	5			5		5	5	5	5
	Leptospermum arachnoides		5					, J	5	,			
	Leptospermum uracimolaes		_ >						_ ɔ				

Swamp 16 – Vegetation condition

			Tran	sect :	1	Tra	ansec	t 2		Tra	nsec	t 3	
Family	Species	S16T1Q1A20	S16T1Q2A20	S16T1Q3A20	S16T1Q4A20	S16T2Q1A20	S16T2Q2A20	S16T2Q3A20	S16T3Q1A20	S16T3Q2A20	S16T3Q3A20	S16T3Q4A20	S16T3Q5A20
	Leptospermum squarrosum	5	5	5	5			5	5	5	5	5	5
	Leptospermum trinervium			5		5	5	5	5				
Orchidaceae	Genoplesium fimbriatum							5					
	Anisopogon avenaceus									5			
Poaceae	Entolasia stricta	5	5					5	5	5			
	Microlaena stipoides										5		
	Banksia ericifolia subsp. ericifolia	5	5	5	5		4	5	4	5	5	5	5
	Grevillea oleoides	5										5	
	Hakea dactyloides	5	5	5				5	5		5	5	
	Hakea teretifolia			5	5				5		5	5	5
Proteaceae	Isopogon anethifolius									5			
	Lambertia formosa			5									
	Persoonia pinifolia			5								5	
	Petrophile pulchella	5		5	4	5	4	4	5		5	5	5
	Petrophile sessilis												5
	Chordifex dimorphus	5		4	5							5	5
Restionaceae	Leptocarpus tenax			5	5								
	Lepyrodia scariosa		5	5	5			5	5	5	5	5	
Rutaceae	Boronia parviflora	5											
Stylidiaceae	Stylidium lineare	5		5	5			5	5			5	5
Vantharrhanass	Xanthorrhoea resinosa			4	5				5		5	5	4
Xanthorrhoeaceae	Xanthorrhoea sp.							5					
Xyridaceae	Xyris gracilis											5	5
TOTAL		24	22	30	22	12	13	25	25	18	18	29	20

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve R: Rare in Australia but does not have an identifiable threat
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- -: reserved population size is not accurately known
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 17 – Vegetation condition

		Tra	anse	ct 1			Tra	anse	ct 2				•	Trans	sect 3	3	
Family	Species	S17T1Q1A20	S17T1Q2A20	S17T1Q3A20	S17T2Q1A20	S17T2Q2A20	S17T2Q3A20	S17T2Q4A20	S17T2Q5A20	S17T2Q6A20	S17T2Q7A20	S17T3Q1A20	S17T3Q2A20	S17T3Q3A20	S17T3Q4A20	S17T3Q5A20	S17T3Q6A20
	Actinotus minor	5	5	5	5		5				4	5	5	5	5		
	Platysace linearifolia												5		5		
Apiaceae	Xanthosia pilosa	5						5	5							5	
	Xanthosia tridentata									5							
Casuarinaceae	Allocasuarina littoralis	5		5								5					
Colchicaceae	Burchardia umbellata														5		
	Cyathochaeta diandra	5	5									5	5				
	Lepidosperma filiforme	5	5	5			4	5	4	4		5	5		3	5	
Cyperaceae	Lepidosperma neesii					5		5				5	5		5	5	
	Ptilothrix deusta	5	5	5	5	5		5	5	5	5		5	5	5	5	5
	Schoenus brevifolius										4						
	Hibbertia riparia				5	5			5		5						
Dilleniaceae	Hibbertia serpyllifolia	5						5		5							
	Drosera peltata				5									5			4
Droseraceae	Drosera spatulata			5													
Elaeocarpaceae	Tetratheca neglecta ▲ 3RC-	5										5	5				
Liacoca, paccae	Epacris microphylla		5	5		5	4	5	5		5			5		5	5
	Leucopogon esquamatus	5					·										
	Leucopogon microphyllus																
Ericaceae	var. microphyllus	5	5	5		5	5				5	5					5
	Monotoca scoparia	5						5				5			4		
	Styphelia tubiflora															5	
	Bossiaea scolopendria						3			5	5					5	
	Daviesia corymbosa			5													
	Dillwynia sp.												5				
Fabaceae	Gompholobium glabratum	5		5													
(Faboideae)	Mirbelia rubiifolia		5	5	5			5									
,	++Pultenaea aristata ▲ 2V		5		5	5	4		5	5							
	Pultenaea stipularis		-			_	_						5			5	
	Pultenaea tuberculata		5	5													
Fabaceae	Acacia sp.																5
(Mimosoideae)	Acacia suaveolens						5										
Goodeniaceae	Dampiera stricta					5	5		5								
Haloragaceae	Gonocarpus tetragynus							5					5				
Iridaceae	Patersonia sericea														5		
Lauraceae	Cassytha glabella	2							5			5	5				
Lauraceae	Lomandra cylindrica								,						5		
	Lomandra glauca											5	5				
Lomandraceae	Lomandra gracilis)	3		5		<u> </u>
	Lomandra obliqua			5											5		\vdash
)						5				5	5	5	\vdash
	Angophora hispida									٦			Э.		٥		
	Baeckea imbricata			_	5		5				_			5			<u>-</u>
Myrtaceae	Calytrix tetragona			5	5	_	5		_		5	_		5			5
	Darwinia diminuta ▲ 2RCi					5	_		5			5					-
	Eucalyptus oblonga	_					5					5					_
	Eucalyptus sp.	5															

Swamp 17 – Vegetation condition

		Tra	anse	ct 1			Tra	ansec	t 2				-	Trans	ect 3	3	
Family	Species	S17T1Q1A20	S17T1Q2A20	S17T1Q3A20	S17T2Q1A20	S17T2Q2A20	S17T2Q3A20	S17T2Q4A20	S17T2Q5A20	S17T2Q6A20	S17T2Q7A20	S17T3Q1A20	S17T3Q2A20	S17T3Q3A20	S17T3Q4A20	S17T3Q5A20	S17T3Q6A20
	Kunzea capitata	5	5	5	5		5		5	5	5			5		5	5
	Leptospermum arachnoides	5		5			5				5					5	5
	Leptospermum squarrosum		5		5	5	5		5		5						5
	Leptospermum trinervium	5					5						5			5	
Poaceae	Anisopogon avenaceus												5				
	Banksia ericifolia subsp. ericifolia	3	3	5	5	5	5	5	5	5	3	5		5	5	5	
	Banksia marginata			5				5									
	Grevillea oleoides	5		5			5										
	Hakea dactyloides			5									5			5	
Proteaceae	Hakea gibbosa												5				
	Hakea teretifolia									5				5			
	Isopogon anemonifolius	5			5												
	Isopogon anethifolius			5						5							
	Lambertia formosa								5								
	Petrophile pulchella	4	5	5	5	5	5	5	5	5	5	5	5				5
	Chordifex dimorphus		5	3	5		5	5	4	4							
Dantin un anna	Chordifex fastigiatus				5	5	5		4		5						
Restionaceae	Empodisma minus																5
	Lepyrodia scariosa			5	5	5	5	5	5		5	5	5	5		5	5
Schizaeaceae	Schizaea bifida	2															
Stylidiaceae	Stylidium lineare	5		5		5	5							5			
Xanthorrhoeaceae	Xanthorrhoea resinosa	4	5	5						5		5	5			5	
TOTAL		24	15	25	16	14	22	14	17	14	15	16	20	12	13	16	12

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve R: Rare in Australia but does not have an identifiable threat
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- -: reserved population size is not accurately known
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

67

Valley Side Swamp monitoring sites - Autumn 2020

Swamp 18 – Vegetation condition

						Trans	sect 1	L							Tra	ansec	t 2					Tr	anse	ct 3	
Family	Species	S18T1Q1A20	S18T1Q2A20	S18T1Q3A20	S18T1Q4A20	S18T1Q5A20	S18T1Q6A20	S18T1Q7A20	S18T1Q8A20	S18T1Q9A20	S18T2Q1A20	S18T2Q2A20	S18T2Q3A20	S18T2Q4A20	S18T2Q5A20	S18T2Q6A20	S18T2Q7A20	S18T2Q8A20	S18T2Q9A20	S18T2Q10A20	S18T3Q1A20	S18T3Q2A20	S18T3Q3A20	S18T3Q4A20	S18T3Q5A20
Apiaceae	Actinotus minor	5			5			5	5	5	5	5	5	5		5	5	5		5		5			5
Canadinasaa	Allocasuarina distyla	5								5															
Casuarinaceae	Allocasuarina littoralis																5								
Cunoniaceae	Bauera microphylla															5	3	4		3					
	Lepidosperma filiforme							3							4	5			5	5		5		5	5
Cunarasaa	Lepidosperma neesii					5			5								5		5	5					
Cyperaceae	Ptilothrix deusta		5	5	5	5	5	5	5	5	5	3	5	5	5	5	5	5	5	5	5	5	5	5	5
	Schoenus brevifolius				5												5								4
Dillaniasas	Hibbertia riparia		5	5	5				5	5			5		5							5			
Dilleniaceae	Hibbertia serpyllifolia	4		5				5			5		5												
Droseraceae	Drosera peltata							5				5			5	5			5			5	5		
	Epacris microphylla	3	2			5		3		5	4		5	5		5		5		5	5	5	5	5	5
Fui	Epacris obtusifolia							5									5	5		5					
Ericaceae	Leucopogon esquamatus																			5				5	
	Leucopogon microphyllus var. microphyllus	3	5	5	5			5	5	3	5	5	5	5						5	5	5	5		
	Bossiaea scolopendria																							4	
Fabaceae (Faboideae)	Gompholobium glabratum												5											5	
	++Pultenaea aristata ▲ 2V						5	5	5	5	5		5	5		5				5		5	5	5	4
Fabaceae (Mimosoideae)	Acacia sp.																				5	5			
Goodeniaceae	Dampiera stricta						5			5			5							5		5			
Haloragaceae	Gonocarpus teucrioides																								5
Lauraceae	Cassytha glabella				5		5		5								2	5						5	
Lomandraceae	Lomandra obliqua										5														
	Baeckea imbricata			5	5	5	5	5	5	5	5	5	5	5	5		5	5	5	5		5	5		
	Callistemon citrinus																			5					
Myrtaceae	Calytrix tetragona			5							5	5	5		5										
	Corymbia gummifera	5							5																
	Darwinia diminuta ▲ 2RCi								5		5	5													

Swamp 18 – Vegetation condition

						Trans	sect 1	l.							Tra	nsec	:t 2					Tra	ansed	:t 3	
Family	Species	S18T1Q1A20	S18T1Q2A20	S18T1Q3A20	S18T1Q4A20	S18T1Q5A20	S18T1Q6A20	S18T1Q7A20	S18T1Q8A20	S18T1Q9A20	S18T2Q1A20	S18T2Q2A20	S18T2Q3A20	S18T2Q4A20	S18T2Q5A20	S18T2Q6A20	S18T2Q7A20	S18T2Q8A20	S18T2Q9A20	S18T2Q10A20	S18T3Q1A20	S18T3Q2A20	S18T3Q3A20	S18T3Q4A20	S18T3Q5A20
	Kunzea capitata	5	5	5	5	5	5	5	5	5	5	4	5	5	5			5	5	5	5	5		5	5
	Leptospermum arachnoides			5				5		5		5	5												
	Leptospermum squarrosum	5	5		5	5	5	5	5	5	5		5	5	5	5	5	5	5	5	5	5	5	5	5
	Leptospermum trinervium										5														
Poaceae	Entolasia stricta																			5					
	Banksia ericifolia subsp. ericifolia	5	5	5	5	5	5	5	5	3	4		5	5	3	5	5	5	5	5	5	5	5	5	5
	Banksia oblongifolia						5						5												
Dantaga	Hakea dactyloides	5			5				5																
Proteaceae	Hakea gibbosa			4	2												5								
	Hakea teretifolia	5				5	5	5	5	3	5			5	5	5			5		5	5	5	3	
	Isopogon anethifolius		5	5	5																5			5	5
	Petrophile pulchella	5	5	5	5	5			5	5	5	5	4	5	3	1	5	5	5	5	5	4	5	5	
	Baloskion gracile										5														
	Chordifex dimorphus	3	4	5			5				5														
Restionaceae	Chordifex fastigiatus		5	4	4	5	4	4	5	4	4	5	4	4	5	5	4	5	5	4	5	5	5		
Restionaceae	Empodisma minus															5	5				5				
	Leptocarpus tenax																						5		
	Lepyrodia scariosa			5	5	5		4	4	5	5	5	5	4	5	5	4	5	5	5		5	5	5	5
Stylidiaceae	Stylidium lineare							5		5	5	5	4	5				5	5						
Xanthorrhoeaceae	Xanthorrhoea resinosa		5	5	5	5		5	5	5		5				5	4	5		3	5			5	
TOTAL		13	12	16	17	12	12	19	19	19	21	14	20	14	13	15	17	15	13	21	13	18	13	16	12

Condition Scale:

- 1 = severe damage/dieback
 - 4 = minor damage
- 2 = many dead stems
- 5 = healthy
- 3 = some dead branches

conservation reserve
R: Rare in Australia but does not have an

C: Reserved in that at least one population is

found in a national park or other proclaimed

RoTAP species:

identifiable threat

- 2: Geographic range in Australia less than 100 km $\,$ V: Taxon not presently Endangered, but at
 - risk over a longer period i: less than 1000 plants are known to occur within a conservation reserve(s)
- + Species listed as Vulnerable under NSW
 Biodiversity Conservation Act (2016) and
 Commonwealth Environment Protection
 and Biodiversity Conservation Act (1999)

Swamp 24 – Vegetation condition

				Trans	sect 1	L			Tra	anse	ct 2			Tran	sect	3
Family	Species	S24T1Q1A20	S24T1Q2A20	S24T1Q3A20	S24T1Q4A20	S24T1Q5A20	S24T1Q6A20	S24T2Q1A20	S24T2Q2A20	S24T2Q3A20	S24T2Q4A20	S24T2Q5A20	S24T3Q1A20	S24T3Q2A20	S24T3Q3A20	S24T3Q4A20
Austhoniosoco	Laxmannia gracilis															5
Anthericaceae	Thysanotus juncifolius									5						
	Actinotus minor		5	5		5										5
Apiaceae	Platysace linearifolia				5			5								
	Xanthosia tridentata															5
Casuarinaceae	Allocasuarina littoralis										5					
Compania and	Bauera microphylla				5	5			5	5						
Cunoniaceae	Bauera rubioides			5	5						5					
	Lepidosperma filiforme					5			5	5	5			5	5	4
	Lepidosperma neesii			5							5	4		5		5
Cyperaceae	Ptilothrix deusta	5	5	5	5		5	5	5	5	5	5		5		
	Schoenus brevifolius		5		5	5	5				5	4				
	Schoenus ericetorum															5
Dilleniaceae	Hibbertia serpyllifolia	5	5					5								
	Drosera peltata		5						5					5	5	
Droseraceae	Drosera spatulata						5				5			_		
	Epacris microphylla	5	5	5		4		5	5		_		5		5	5
	Epacris obtusifolia	5		5	5	5	5	5	5	5	5	5				Ť
	Leucopogon amplexicaulis							5								
Ericaceae	Leucopogon esquamatus												5			
	Leucopogon microphyllus var.															
	microphyllus	5											4	5	5	5
	Sprengelia incarnata										4					
	Gompholobium glabratum		5					5								
Fabaceae	Gompholobium sp.	5														
(Faboideae)	Mirbelia rubiifolia				5				5		5	5				
	Pultenaea tuberculata	5	5					5								
Fabaceae	Acacia myrtifolia					5										
(Mimosoideae)	Acacia suaveolens															5
Goodeniaceae	Dampiera stricta	5	5	5	5	5	5	5	5	5						5
Lauraceae	Cassytha glabella	5	5				5		5	5						
Lindsaeaceae	Lindsaea linearis	3			5			5								
	Lomandra cylindrica															5
Lomandraceae	Lomandra glauca															5
	Lomandra obliqua												5		2	5
	Baeckea imbricata	5	4	5	5	5	5		5	5	5	5		5	5	
	Corymbia gummifera							5								5
	Darwinia diminuta ▲ 2RCi														3	Ť
Myrtaceae	Eucalyptus haemastoma							5								
,	Kunzea capitata	5	5		5	5	5	5	5	5	5	5	5	4	5	
	Leptospermum arachnoides	5	5					٦		5			,	5	5	
	Leptospermum squarrosum	5	5	5	5	5	5	5	4		5	5		5	4	5
Orchidaceae	Cryptostylis erecta	ر	ر	ر ا	ر ا	ر ا	ر	ر	4	٦	٠	ر ا	5	ر ا	4	<u>ر</u>
Orchidatede	Entolasia stricta	5)			5
Poaceae)				5										_ <u></u>
	Tetrarrhena turfosa Banksia ericifolia subsp.					5										
Proteaceae	ericifolia	4	5	5	5	5	5	5	4	5	5	5	5	5	5	4

Swamp 24 – Vegetation condition

				Trans	sect 1	l.			Tr	anse	ct 2			Tran	sect 3	3
Family	Species	S24T1Q1A20	S24T1Q2A20	S24T1Q3A20	S24T1Q4A20	S24T1Q5A20	S24T1Q6A20	S24T2Q1A20	S24T2Q2A20	S24T2Q3A20	S24T2Q4A20	S24T2Q5A20	S24T3Q1A20	S24T3Q2A20	S24T3Q3A20	S24T3Q4A20
	Banksia oblongifolia			5		3			4	5						
	Grevillea oleoides														5	5
	Hakea teretifolia	5	5	5	5	3	5	5	5	3	5	5	5			
	Isopogon anemonifolius		5													
	Petrophile pulchella									5	5	5		5		
	Symphionema paludosum							5		5	5					
	Baloskion gracile	5	5			5		5	4				5			
	Chordifex dimorphus							5								
D. atiana and	Chordifex fastigiatus					4			4	5	5	4	5	5	5	
Restionaceae	Empodisma minus	5	5	5	3	4	5	5	5	5	5					
	Leptocarpus tenax	3	5	5	5	5	5	5	5			5				
	Lepyrodia scariosa		5				5	5		5	5		5		5	5
Rhamnaceae	Cryptandra ericoides		5													
Selaginellaceae	Selaginella uliginosa				5	5		5								
Stylidiaceae	Stylidium lineare	5	5	5	5			5	5	5	5	5	5	5	5	
Xanthorrhoeaceae	Xanthorrhoea resinosa	5	5			5			4	5	5		5	5		5
Xyridaceae	Xyris gracilis		5	5				5	5							
TOTAL		22	25	16	18	21	14	25	22	21	22	14	13	14	15	20

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

▲ RoTAP species:

- $2\colon$ Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- i: less than 1000 plants are known to occur within a conservation reserve(s)

Swamp 25 – Vegetation condition

					Tran	sect 1					Tran	sect 2			Tı	ansec	t 3	
Family	Species	S25T1Q1A20	S25T1Q2A20	S25T1Q3A20	S25T1Q4A20	S25T1Q5A20	S25T1Q6A20	S25T1Q7A20	S25T1Q8A20	S25T2Q1A20	S25T2Q2A20	S25T2Q3A20	S25T2Q4A20	S25T3Q1A20	S25T3Q2A20	S25T3Q3A20	S25T3Q4A20	S25T3Q5A20
Apiaceae	Actinotus minor	5	5							5	5							
Casuarinaceae	Allocasuarina distyla				5				5	5		5						
Colchicaceae	Burchardia umbellata	5		5				5					5					
Cunaninana	Bauera microphylla	5	5	5						5			5					
Cunoniaceae	Bauera rubioides											5						
	Cyathochaeta diandra									5	5		5					
	Lepidosperma filiforme				5	4						5	5					
Cyperaceae	Lepidosperma neesii			5											5	5	5	5
	Ptilothrix deusta	5	5	5			5	4	5	5	5		5	4		5		
	Schoenus brevifolius				5	4	5	4	4		5		5				4	3
Dilleniaceae	Hibbertia serpyllifolia	5								5	5			5				
D	Drosera peltata						5		5		5		5					
Droseraceae	Drosera spatulata								5									
Edinaria	Epacris microphylla	5	5				5			5			5					
Ericaceae	Epacris obtusifolia		5	5		5		4	5			5	5					
Fahaaaa (Fahaidaaa)	Dillwynia floribunda	5		5		5				5								5
Fabaceae (Faboideae)	++Pultenaea aristata ▲2V											5	5					
Goodeniaceae	Dampiera stricta							5		5	5	5	5					
Lauraceae	Cassytha glabella							5				5						
	Baeckea imbricata		5			5	5	4	5		5	5	5					5
	Corymbia gummifera									5								
	Eucalyptus luehmanniana ▲ 2RCa	5	5							5								
D. 4	Eucalyptus racemosa													4	5			
Myrtaceae	Kunzea capitata	5	5							5	5	5						
	Leptospermum arachnoides					2					5	5						
	Leptospermum squarrosum	5	5	5	5	5	5	5	5	5		5	5		5	5	5	5
	Leptospermum trinervium									5								
Poaceae	Entolasia stricta													5	5		5	

Swamp 25 – Vegetation condition

					Trans	sect 1					Tran	sect 2			Tr	ansect	: 3	
Family	Species	S25T1Q1A20	S25T1Q2A20	S25T1Q3A20	S25T1Q4A20	S25T1Q5A20	S25T1Q6A20	S25T1Q7A20	S25T1Q8A20	S25T2Q1A20	S25T2Q2A20	S25T2Q3A20	S25T2Q4A20	S25T3Q1A20	S25T3Q2A20	S25T3Q3A20	S25T3Q4A20	S25T3Q5A20
	Banksia ericifolia subsp. ericifolia	5	5	5	5	5	5	5	5	5		5	5	5	5	5	5	5
	Hakea teretifolia	5		5	5	5	5	5	3	5		5	3	5		5	5	5
Proteaceae	Lambertia formosa													5				
	Persoonia pinifolia	5								5			5	5				
	Petrophile pulchella	4	5	5	5	5	5	5	5		5	5		5	5	5	5	5
	Chordifex dimorphus		4							5			5					
	Chordifex fastigiatus					4	4	4	5		5	5	4					
Restionaceae	Empodisma minus	5	5	5	3				5	5				3	5	5	4	5
	Leptocarpus tenax	5								5			5	5				5
	Lepyrodia scariosa		5			5			5		5	5	5	5				5
Stylidiaceae	Stylidium lineare		5	5						5		5	5					
Xanthorrhoeaceae	Xanthorrhoea resinosa	5	5	5				3		5	5	5	5	3	5	5		
TOTAL		17	16	13	8	12	10	13	14	22	14	18	22	13	8	8	8	11

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- a: 1000 plants or more are known to occur within a conservation reserve(s)

++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 101 – Vegetation condition

						Tran	sect	1							Tra	nse	ct 2								Tra	nsec	t 3				
Family	Species	S101T1Q1A20	S101T1Q2A20	S101T1Q3A20	S101T1Q4A20	S101T1Q5A20	S101T1Q6A20	S101T1Q7A20	S101T1Q8A20	S101T1Q9A20	S101T1Q10A20	S101T2Q1A20	S101T2Q2A20	S101T2Q3A20	S101T2Q4A20	S101T2Q5A20	S101T2Q6A20	S101T2Q7A20	S101T2Q8A20	S101T2Q9A20	S101T3Q1A20	S101T3Q2A20	S101T3Q3A20	S101T3Q4A20	S101T3Q5A20	S101T3Q6A20	S101T3Q7A20	S101T3Q8A20	S101T3Q9A20	S101T3Q10A20	S101T3Q11A20
Anthericaceae	Thysanotus juncifolius																						5			5					
A	Actinotus minor												5	5	5	5	5				5					5					5
Apiaceae	Platysace linearifolia												5																		
Casuarinaceae	Allocasuarina littoralis													5							5										
Colchicaceae	Burchardia umbellata					5				5										5										5	
•	Bauera microphylla									5	5			5						5						5	5	5	5		
Cunoniaceae	Bauera rubioides	5													5																
	Chorizandra cymbaria											5																			
	Cyathochaeta diandra	5	5								5			5	5	4	5	5	5	5	5							5			
•	Lepidosperma filiforme										5		5																		
Cyperaceae	Lepidosperma neesii	5	5	5	5	4	5	5	5	5	5	5		5	5	4	5	5	5	5	5	5	4	5	5	4	5	5	5	5	5
	Ptilothrix deusta		5	5	5	5	5	5	5	5	5		5	5	5	5	5	5	5	5	5	5		5	5	5	5	5	5	5	5
	Schoenus brevifolius	5			5	5	5	5	5	5	5	5	4		5	5			5	5			4	5	5	5	5	5	5	4	4
Dilleniaceae	Hibbertia serpyllifolia																				5										
Droseraceae	Drosera peltata								5		5	5	5				5														5
	Epacris microphylla	5																3	5	5	5	5									
Ericaceae	Epacris obtusifolia													5		5	5			5		5		5		5	5			3	
	Dillwynia floribunda										5																				
Fabaceae (Faboideae)	Mirbelia rubiifolia													5														5			5
	++Pultenaea aristata ▲ 2V																	5													
Goodeniaceae	Dampiera stricta													5				5			5					5					5
Lauraceae	Cassytha glabella			5		5			5		5		5	5	5	5	5	5		5	5			5		5			5	5	5
Lindsaeaceae	Lindsaea linearis												5		5					5											
	Baeckea imbricata				5	5	5	4	5	5			5	5	5			5	5		5	5		5					5	4	5
N de unha a a a a	Eucalyptus oblonga		5																												
Myrtaceae	Leptospermum arachnoides												5																		
	Leptospermum squarrosum	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5

Swamp 101 – Vegetation condition

						Tran	sect	1							Tra	nsed	ct 2								Tra	nsec	t 3				
Family	Species	S101T1Q1A20	S101T1Q2A20	S101T1Q3A20	S101T1Q4A20	S101T1Q5A20	S101T1Q6A20	S101T1Q7A20	S101T1Q8A20	S101T1Q9A20	S101T1Q10A20	S101T2Q1A20	S101T2Q2A20	S101T2Q3A20	S101T2Q4A20	S101T2Q5A20	S101T2Q6A20	S101T2Q7A20	S101T2Q8A20	S101T2Q9A20	S101T3Q1A20	S101T3Q2A20	S101T3Q3A20	S101T3Q4A20	S101T3Q5A20	S101T3Q6A20	S101T3Q7A20	S101T3Q8A20	S101T3Q9A20	S101T3Q10A20	S101T3Q11A20
Orchidaceae	Genoplesium fimbriatum												5																		
	Anisopogon avenaceus												5		5	5			5												
Poaceae	Entolasia stricta			5		5										5		5	5						5	3		5			
	Tetrarrhena turfosa															5										5					
	Banksia ericifolia subsp. ericifolia	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	4	4	5	5	5	4
	Banksia oblongifolia			5			5																								
Proteaceae	Hakea teretifolia	5	5	5	5	4	5	5	5	5	5	5	5		5	5	5	4	5	5	5	5	5	5	5	5	5	5	5		5
	Persoonia pinifolia												5																		
	Petrophile pulchella	5	5	5	5	5	5	5		5	5	5	5	5	5	5	5	5	5	5	5	5	5		5	5	5	5			
	Empodisma minus	5			5							5	5												5			5			
Restionaceae	Leptocarpus tenax	5		5	5	5	5	5	5	5				5		5	5			5	5		5	5	5		5			5	5
	Lepyrodia scariosa	5	5	5		5			5	5		5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5		5
Rutaceae	Boronia parviflora																													5	
Stylidiaceae	Stylidium lineare						5					5	5	5	5		5		5											5	
Thymelaeaceae	Pimelea linifolia					5																									
Xanthorrhoeaceae	Xanthorrhoea resinosa					4							4		5			5	5	5		5	4					5			
TOTAL		12	9	11	10	15	11	9	11	12	13	11	21	17	17	16	14	15	15	17	16	11	10	11	11	16	11	14	10	12	14

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

RoTAP species:

- 2: Geographic range in Australia less than 100 km
- V: Taxon not presently Endangered, but at risk over a longer period
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 111a – Vegetation condition

Aplaceae Platysace linearifolia 5 5 5 5 5 5 5 5 5					Tran	sect	1			Tra	nse	ct 2			Tra	nse	:t 3	
Apiaceae Platysace linearifolia 5	Family	Species	S111aT1Q1A20	S111aT1Q2A20	S111aT1Q3A20	S111aT1Q4A20	S111aT1Q5A20	S111aT1Q6A20	S111aT2Q1A20	S111aT2Q2A20	S111aT2Q3A20	S111aT2Q4A20	S111aT2Q5A20	S111aT3Q1A20	S111aT3Q2A20	S111aT3Q3A20	S111aT3Q4A20	S111aT3Q5A20
Xanthosia pilosa		Actinotus minor		5	5			5	5					5				
Casuarinaceae Allocosuarina littoralis	Apiaceae	Platysace linearifolia	5					5						5				
Colchicaceae Burchardia umbellata		Xanthosia pilosa							5									
Cunoniaceae Bauera microphylla	Casuarinaceae	Allocasuarina littoralis								5								
Cyperaceae Cyathochaeta diandra 5 5 8 1 4 4 1 5 5 5 3 5 <th< td=""><td>Colchicaceae</td><td>Burchardia umbellata</td><td></td><td></td><td></td><td></td><td></td><td></td><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></th<>	Colchicaceae	Burchardia umbellata							5									
Cyperaceae Lepidosperma neiliforme	Cunoniaceae	Bauera microphylla															5	5
Cyperaceae Lepidosperma neiliforme			5	5					4					5	5		5	
Cyperaceae Lepidosperma neesii S															3			
Ptilothrix deusta S S S S S S S S S	Cyperaceae				5	5		3	5	5	5	5	5	5	5			5
Schoenus brevifolius	,,		5	5	_	5				_	_				5	5	5	5
Dilleniaceae Hibbertia riparia 5 5 5 5 5 6 6 6 7 7 7 7 7 7 7						5				_	4	3	4			5	5	5
Droseraceae Drosera peltata S S S S S S S S S	Dilleniaceae	-	5		5					_	_		1	5				
Ericaceae Epacris microphylla 5 5 5 5 5 5 5 5 5		-	+			5						5						
Ericaceae Equation Equation	Diosciaceae		5	5	5	_	5	5						5	5			
Ericaceae Leucopogon esquamatus			+				_										5	
Leucopagon microphyllus var.	Ericaceae		+		5	5	_										<u> </u>	
Hovea linearis		Leucopogon microphyllus var.	5															
Fabaceae (Faboideae) Mirbelia rubiifolia									5									
Haboideae			+					5						5				
Fabaceae (Mimosoideae) Acacia myrtifolia S S S S S S S S S	(Faboideae)		+-		5													
Goodeniaceae Dampiera stricta S S S S S S S S S					, J	5								J				
Lauraceae Cassytha glabella 5 5 5 5 6 6 6 6 6 7 8 7 8 7 8 7 8 7 8 7 8 7 8 8 8 8 8 8 8 9 8 8 8 9 </td <td></td> <td>Dampiera stricta</td> <td></td> <td></td> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>5</td> <td></td> <td></td> <td></td>		Dampiera stricta			5										5			
Lindsaeaceae Lindsaea linearis Image: square linearis		· ·	5	5	_				5									
Lomandraceae Lomandra obliqua 5														5				
Myrtaceae Baeckea imbricata 5 </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td>									5									
Myrtaceae Corymbia gummifera 5<		-		5		5	5			5	5			5	5	5	5	5
Myrtaceae Eucalyptus haemastoma 5 <td< td=""><td></td><td></td><td>+</td><td><u> </u></td><td></td><td></td><td>Ť</td><td></td><td>5</td><td>Ť</td><td>Ť</td><td></td><td></td><td></td><td></td><td>Ť</td><td></td><td>Ť</td></td<>			+	<u> </u>			Ť		5	Ť	Ť					Ť		Ť
Myrtaceae Eucalyptus haemastoma Image: control of the properties of the propertie		, , , ,			5													
Myrtaceae Eucalyptus sieberi 5 </td <td></td> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td>													5					
Leptospermum arachnoides 5 5 5 5 5 5 5 5 5	Myrtaceae							5						5				
Leptospermum squarrosum 5			5	5	5		5								5			
Leptospermum trinervium			+			5	_	5		5	5	5	5			5	5	5
Orchidaceae Genoplesium fimbriatum 5 5 6 7 8 7 8 8 9 <		<u> </u>							5					5				
Orchidaceae Microtis sp. 5 5 6 6 7 8 9			+			5	_											
Poaceae Entolasia stricta 5	Orchidaceae		+			-												
Banksia ericifolia subsp. ericifolia 5	Doggoog	-	+	Е)		Е										
Banksia oblongifolia 5 5 3 Banksia serrata 5 5 5 Grevillea oleoides 5 5 6	roaceae	Banksia ericifolia subsp.	5		5	5	5			5		5	5	5	5	5	5	5
Proteaceae Banksia serrata 5 5 5 5 6 6 6 6 6 7 7 7 7 7 7 7 7 7 7 7			+	5	5										2			
Proteaceae Grevillea oleoides 5			 															
	Proteaceae		+ 3					٦										
			 													_		
			5	-		_) 			-	_)			-	_
			+-	_				_			_	_	5	_	_	5	5	5

Swamp 111a – Vegetation condition

			-	Trans	sect	1			Transect 2					Tra	nsec	:t 3	
Family	Species	S111aT1Q1A20	S111aT1Q2A20	S111aT1Q3A20	S111aT1Q4A20	S111aT1Q5A20	S111aT1Q6A20	S111aT2Q1A20	S111aT2Q2A20	S111aT2Q3A20	S111aT2Q4A20	S111aT2Q5A20	S111aT3Q1A20	S111aT3Q2A20	S111aT3Q3A20	S111aT3Q4A20	S111aT3Q5A20
	Baloskion gracile	5															
	Chordifex dimorphus												5	5			
Destinance	Chordifex fastigiatus		5	5	5	5	5		5	5	5	5		5		5	5
Restionaceae	Empodisma minus						3	3	5				5		5	3	4
	Leptocarpus tenax	5															
	Lepyrodia scariosa	5			5		5	4	5	5	5	5	5				
Santalaceae	Leptomeria acida												5				
Xanthorrhoeaceae	Xanthorrhoea resinosa	1	5	5		5	4	5					1				
TOTAL		16	15	19	18	11	16	18	12	10 9 8 22 15 8 11		11	11				

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Swamp 125 – Vegetation condition

				Tr	ansec	t 1						Trans	sect 2							Tra	ansec	t 3			
Family	Species	S125T1Q1A20	S125T1Q2A20	S125T1Q3A20	S125T1Q4A20	S125T1Q5A20	S125T1Q6A20	S125T1Q7A20	S125T2Q1A20	S125T2Q2A20	S125T2Q3A20	S125T2Q4A20	S125T2Q5A20	S125T2Q6A20	S125T2Q7A20	S125T2Q8A20	S125T3Q1A20	S125T3Q2A20	S125T3Q3A20	S125T3Q4A20	S125T3Q5A20	S125T3Q6A20	S125T3Q7A20	S125T3Q8A20	S125T3Q9A20
Anthericaceae	Thysanotus juncifolius				5																				
A	Actinotus minor	5		5	5		5	5			5		5	5	5	5	5				5	5	5		5
Apiaceae	Platysace linearifolia		5				5	5																	
Canada	Allocasuarina distyla	5													5		5								
Casuarinaceae	Allocasuarina littoralis								5																
Colchicaceae	Burchardia umbellata															5									
Cunoniaceae	Bauera microphylla				5									5											
	Chorizandra cymbaria										1									2					
	Cyathochaeta diandra			5				5							5	5	5					5	5	4	3
	Gahnia sieberiana										4														
Cyperaceae	Lepidosperma filiforme	5		5	4		4	5	5	4	3	5	3							5			4		
	Lepidosperma neesii	5				5			5	5			5	5		5	5				5	5			
	Ptilothrix deusta	5	5	5	5	5							5	5	5	5	5	5	5		5	5	5	5	4
	Schoenus brevifolius									5	4	3							2	3					
Dilla minana	Hibbertia riparia							5																	
Dilleniaceae	Hibbertia serpyllifolia			5												5	5								
	Epacris microphylla				5			5					5		5	5	5							5	5
	Epacris obtusifolia							5		5	4														
Ericaceae	Leucopogon esquamatus	5			5																				
	Leucopogon microphyllus var. microphyllus	5		5			5	5								5									5
	Sprengelia incarnata														5							5			
	Dillwynia floribunda	5		5	5		5			5		5					5			5			5		
Fabaceae (Faboideae)	Mirbelia rubiifolia							5																	
(Fabbluede)	Pultenaea tuberculata							5																	5
Goodeniaceae	Dampiera stricta							5			5					5	5								5
Haloragaceae	Gonocarpus tetragynus													5		5									\Box
Lauraceae	Cassytha glabella	5	5		5			5		5			5	5		5	5				5			5	

Swamp 125 – Vegetation condition

				Tr	ansec	t 1						Trans	sect 2							Tr	ansec	t 3			
Family	Species	S125T1Q1A20	S125T1Q2A20	S125T1Q3A20	S125T1Q4A20	S125T1Q5A20	S125T1Q6A20	S125T1Q7A20	S125T2Q1A20	S125T2Q2A20	S125T2Q3A20	S125T2Q4A20	S125T2Q5A20	S125T2Q6A20	S125T2Q7A20	S125T2Q8A20	S125T3Q1A20	S125T3Q2A20	S125T3Q3A20	S125T3Q4A20	S125T3Q5A20	S125T3Q6A20	S125T3Q7A20	S125T3Q8A20	S125T3Q9A20
Lindsaeaceae	Lindsaea linearis							5								5	5					5			5
Loganiaceae	Mitrasacme polymorpha															5									
Lomandraceae	Lomandra obliqua	5					5							5	5										
	Angophora costata							5																	
	Angophora hispida		5				5																		
	Baeckea imbricata		5	5	5	5			5	5	5			5						5					
	Darwinia diminuta ▲ 2RCi				5		5							5	5	5									
Myrtaceae	Darwinia fascicularis				5																				
	Eucalyptus racemosa																5							5	5
	Leptospermum arachnoides		5	5	5								5			5									
	Leptospermum squarrosum	5	5	5	5	5			5	5	5	5	5	5	5	5	5	5	3	5	5	5	5	5	
	Leptospermum trinervium	5						5																	
Poaceae	Anisopogon avenaceus						5																		
Poaceae	Entolasia stricta																5								
	Banksia ericifolia subsp. ericifolia	4	5	5	5	5	5	5	4	5	5	5	5	5		5	5	5	3	5	5	5	5	5	5
	Banksia marginata						5	3																	
	Banksia oblongifolia	5	5		4																				
	Hakea dactyloides						5								5										
Duntanana	Hakea gibbosa		5	5	5	5	5			5													5	5	
Proteaceae	Hakea teretifolia	4	5	5		5		5	5	5	5	5		5	5	5	5		5	5	5	5	5		5
	Isopogon anethifolius	4	5	5	5	5	5	5	5		5	5		5	5	5	5	5		5	5	5	5		5
	Lomatia silaifolia						5																		
	Persoonia pinifolia						5									5								5	
	Petrophile pulchella					5	5	5	3	5		5			5	5	4	5							
	Chordifex dimorphus						4	5							5										
Restionaceae	Chordifex fastigiatus	5		4	4	4	4	5	5	5	5	4	5	3	5	5							4		
	Empodisma minus								5	5							4	5	5	5	5	4	4		

Swamp 125 – Vegetation condition

				Tra	ansec	t 1						Trans	ect 2							Tra	ansec	t 3			
Family	Species	S125T1Q1A20	S125T1Q2A20	S125T1Q3A20	S125T1Q4A20	S125T1Q5A20	S125T1Q6A20	S125T1Q7A20	S125T2Q1A20	S125T2Q2A20	S125T2Q3A20	S125T2Q4A20	S125T2Q5A20	S125T2Q6A20	S125T2Q7A20	S125T2Q8A20	S125T3Q1A20	S125T3Q2A20	S125T3Q3A20	S125T3Q4A20	S125T3Q5A20	S125T3Q6A20	S125T3Q7A20	S125T3Q8A20	S125T3Q9A20
	Leptocarpus tenax	5			5		5	5								5	5			5			4	5	4
	Lepyrodia scariosa			5	4		5		5	5	5	4	5			5	5	5	5	5				5	4
Selaginellaceae	Selaginella uliginosa							5																	
Stylidiaceae	Stylidium lineare			5			5	5						5											5
Xanthorrhoeaceae	Xanthorrhoea resinosa				5	5			5		5		5	5	5	5					5		4		
TOTAL		18	12	17	22	11	22	25	13	15	15	10	12	16	16	25	21	7	7	12	10	11	14	11	15

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- i: less than 1000 plants are known to occur within a conservation reserve(s)

Upland Swamp monitoring sites – Autumn 2020

Species which recorded an increase in average condition (from spring 2019)

Longwall and Control Sites	Longwall Sites Only	Control Sites Only
Baeckea imbricata	Actinotus minor	Banksia oblongifolia
Bauera microphylla	Banksia ericifolia subsp. ericifolia	Epacris microphylla
Cassytha glabella	Dampiera stricta	Hakea gibbosa
Chordifex dimorphus	Entolasia stricta	Petrophile pulchella
Chordifex fastigiatus	Eucalyptus oblonga	Ptilothrix deusta
Cyathochaeta diandra	Hakea teretifolia	Schoenus brevifolius
Empodisma minus	Hibbertia riparia	
Epacris obtusifolia	Hibbertia serpyllifolia	
Isopogon anethifolius	Kunzea capitata	
Leptocarpus tenax	Lepidosperma filiforme	
Lepyrodia scariosa	Leptospermum arachnoides	
Leucopogon esquamatus	Leucopogon microphyllus var. microphyllus	
Platysace linearifolia	Lomandra obliqua	
Xanthorrhoea resinosa	Pultenaea stipularis	

Upland Swamp monitoring sites - Autumn 2020

Species which recorded a decrease in average condition (from spring 2019)

Longwall and Control Sites	Longwall Sites only	Control Sites Only
Baeckea imbricata	Actinotus minor	Banksia marginata
Banksia ericifolia subsp. ericifolia	Baloskion gracile	Chorizandra cymbaria
Banksia oblongifolia	Bauera microphylla	Cyathochaeta diandra
Chordifex fastigiatus	Bossiaea scolopendria	Entolasia stricta
Empodisma minus	Cassytha glabella	
Epacris microphylla	Chordifex dimorphus	
Epacris obtusifolia	Darwinia diminuta ▲ 2RCi	
Hakea teretifolia	Daviesia corymbosa	
Lepidosperma filiforme	Drosera peltata	
Lepidosperma neesii	Eucalyptus racemosa	
Leptocarpus tenax	Hakea gibbosa	
Leptospermum squarrosum	Hibbertia serpyllifolia	
Lepyrodia scariosa	Kunzea capitata	
Petrophile pulchella	Leucopogon microphyllus var. microphyllus	
Ptilothrix deusta	Lindsaea linearis	
Schoenus brevifolius	Lomandra obliqua	
Xanthorrhoea resinosa	Mirbelia rubiifolia	
	Monotoca scoparia	
	++Pultenaea aristata ▲ 2V	
	Pultenaea tuberculata	
	Schoenus brevifolius	
	Sprengelia incarnata	
	Stylidium lineare	

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- V: Taxon not presently Endangered, but at risk over a longer period
- i: less than 1000 plants are known to occur within a conservation reserve(s)
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

E4: Indicator species data – Valley side swamps

Longwall Sites – Condition and Reproductive Rating for Swamp Indicator Species

_			Coord	linates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 18	Epacris obtusifolia	l21	309745.35	6214889.00	2	1
Swamp 18	Epacris obtusifolia	122	309755.21	6214874.11	1	1
Swamp 18	Epacris obtusifolia	123	309766.02	6214884.75	1	1
Swamp 18	Epacris obtusifolia	124	309740.20	6214889.32	4	1
Swamp 18	Epacris obtusifolia	125	309759.57	6214884.61	1	1
Swamp 18	Epacris obtusifolia	126	309757.69	6214889.79	1	1
Swamp 18	Epacris obtusifolia	127	309757.66	6214882.81	1	1
Swamp 18	Epacris obtusifolia	128	309765.46	6214887.55	1	1
Swamp 18	Epacris obtusifolia	129	309756.95	6214894.27	1	1
Swamp 18	Epacris obtusifolia	130	309748.31	6214891.85	1	1
Swamp 18	Epacris obtusifolia	l31	309761.38	6214879.94	2	1
Swamp 18	Epacris obtusifolia	132	309753.47	6214882.74	1	1
Swamp 18	Epacris obtusifolia	133	309771.60	6214890.14	1	1
Swamp 18	Epacris obtusifolia	134	309745.61	6214881.52	1	1
Swamp 18	Epacris obtusifolia	135	309750.72	6214893.67	1	1
Swamp 18	Epacris obtusifolia	136	309759.24	6214899.28	1	1
Swamp 18	Epacris obtusifolia	137	309753.92	6214899.90	1	1
Swamp 18	Epacris obtusifolia	138	309780.01	6214888.92	2	1
Swamp 18	Epacris obtusifolia	139	309771.92	6214885.49	2	1
Swamp 18	Epacris obtusifolia	140	309750.30	6214881.37	2	1
Swamp 18	++Pultenaea aristata ▲ 2V	j1	309736.15	6214891.68	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j2	309731.60	6214888.88	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j3	309729.01	6214890.78	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j4	309727.22	6214893.59	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j5	309731.83	6214894.48	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j6	309733.48	6214891.72	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j7	309736.15	6214885.13	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j8	309738.31	6214880.41	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j9	309742.47	6214883.90	3	1
Swamp 18	++Pultenaea aristata ▲ 2V	j10	309735.03	6214899.04	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j11	309740.09	6214900.37	3	1
Swamp 18	++Pultenaea aristata ▲ 2V	j12	309759.91	6214892.80	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j13	309761.85	6214891.58	3	1
Swamp 18	++Pultenaea aristata ▲ 2V	j14	309765.95	6214891.93	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j15	309774.57	6214889.16	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j16	309772.06	6214880.41	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j17	309767.52	6214878.11	4	1
Swamp 18	++Pultenaea aristata ▲ 2V	j18	309760.01	6214880.59	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j19	309750.96	6214868.38	1	1
Swamp 18	++Pultenaea aristata ▲ 2V	j20	309745.53	6214861.77	1	1
			I			
Swamp 24	Epacris obtusifolia	l61	311321.01	6214040.33	1	1
Swamp 24	Epacris obtusifolia	162	311352.64	6214019.14	1	1
Swamp 24	Epacris obtusifolia	163	311348.84	6214023.33	1	1
Swamp 24	Epacris obtusifolia	164	311354.23	6214026.69	1	1
Swamp 24	Epacris obtusifolia	165	311322.06	6214030.18	1	1
Swamp 24	Epacris obtusifolia	166	311339.31	6214024.32	4	1
Swamp 24	Epacris obtusifolia	167	311319.10	6214040.40	1	3

Longwall Sites – Condition and Reproductive Rating for Swamp Indicator Species

			Coord	linates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 24	Epacris obtusifolia	168	311307.62	6214046.55	1	1
Swamp 24	Epacris obtusifolia	169	311334.73	6214026.96	3	1
Swamp 24	Epacris obtusifolia	170	311324.15	6214033.62	1	1
Swamp 24	Epacris obtusifolia	171	311314.76	6214044.04	1	1
Swamp 24	Epacris obtusifolia	172	311331.66	6214013.21	2	1
Swamp 24	Epacris obtusifolia	173	311325.90	6214018.39	4	1
Swamp 24	Epacris obtusifolia	174	311328.67	6214028.78	4	1
Swamp 24	Epacris obtusifolia	175	311321.10	6214035.26	1	1
Swamp 24	Epacris obtusifolia	176	311358.00	6214018.91	4	1
Swamp 24	Epacris obtusifolia	177	311343.00	6214028.12	3	1
Swamp 24	Epacris obtusifolia	178	311344.05	6214012.04	1	1
Swamp 24	Epacris obtusifolia	179	311347.30	6214017.11	1	1
Swamp 24	Epacris obtusifolia	180	311346.19	6214026.99	4	1
Swamp 24	++Pultenaea aristata ▲ 2V	J81	311317.85	6214014.35	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J82	311320.95	6214011.73	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J83	311320.95	6214009.69	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J84	311323.18	6214012.95	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J85	311323.21	6214010.20	4	1
Swamp 24	++Pultenaea aristata ▲ 2V	J86	311322.08	6214009.51	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J87	311323.78	6214011.69	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J88	311325.90	6214013.48	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J89	311325.13	6214010.41	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J90	311326.05	6214011.15	5	1
Swamp 24	++Pultenaea aristata ▲ 2V	J91	311325.40	6214009.35	2	1
Swamp 24	++Pultenaea aristata ▲ 2V	J92	311328.50	6214009.04	4	1
Swamp 24	++Pultenaea aristata ▲ 2V	J93	311329.26	6214007.20	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J94	311329.77	6214006.70	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J95	311331.93	6214004.00	5	1
Swamp 24	++Pultenaea aristata ▲ 2V	J96	311329.17	6214005.20	1	1
Swamp 24	++Pultenaea aristata ▲ 2V	J97	311325.15	6214006.78	3	1
Swamp 24	++Pultenaea aristata ▲ 2V	J98	311323.98	6214006.66	4	1
Swamp 24	++Pultenaea aristata ▲ 2V	199	311324.29	6214006.20	4	1
Swamp 24	++Pultenaea aristata ▲ 2V	J100	311325.05	6214005.96	1	1
Swamp 24	Sprengelia incarnata	k41	311342.19	6214021.21	1	1
Swamp 24	Sprengelia incarnata	k42	311342.30	6214024.33	1	1
Swamp 24	Sprengelia incarnata	k43	311342.89	6214023.74	1	1
Swamp 24	Sprengelia incarnata	k44	311338.46	6214023.11	5	1
Swamp 24	Sprengelia incarnata	k45	311341.26	6214027.46	1	1
Swamp 24	Sprengelia incarnata	k46	311334.09	6214028.64	3	1
Swamp 24	Sprengelia incarnata	k47	311331.18	6214031.38	1	1
Swamp 24	Sprengelia incarnata	k48	311330.12	6214035.02	3	1
Swamp 24	Sprengelia incarnata	k49	311328.37	6214036.09	1	1
Swamp 24	Sprengelia incarnata	k50	311327.76	6214029.59	1	1
Swamp 24	Sprengelia incarnata	k51	311325.96	6214026.55	1	1
Swamp 24	Sprengelia incarnata	k52	311320.67	6214027.68	1	1
Swamp 24	Sprengelia incarnata	k53	311317.12	6214026.46	1	1
Swamp 24	Sprengelia incarnata	k54	311317.08	6214030.60	3	1

Longwall Sites – Condition and Reproductive Rating for Swamp Indicator Species

		Species Tag Coordinates				Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 24	Sprengelia incarnata	k55	311318.48	6214033.61	1	1
Swamp 24	Sprengelia incarnata	k56	311322.46	6214037.38	4	1
Swamp 24	Sprengelia incarnata	k57	311322.75	6214034.57	1	1
Swamp 24	Sprengelia incarnata	k58	311323.85	6214030.70	1	1
Swamp 24	Sprengelia incarnata	k59	311326.40	6214029.80	4	1
Swamp 24	Sprengelia incarnata	k60	311329.54	6214032.29	1	1
	, ,		ı			1
Swamp 25	Epacris obtusifolia	l81	311161.21	6214008.39	1	1
Swamp 25	Epacris obtusifolia	182	311163.86	6214007.40	1	1
Swamp 25	Epacris obtusifolia	183	311165.89	6214005.05	1	1
Swamp 25	Epacris obtusifolia	184	311176.38	6214011.42	4	1
Swamp 25	Epacris obtusifolia	185	311183.08	6214008.28	1	1
Swamp 25	Epacris obtusifolia	186	311185.64	6214015.17	1	1
Swamp 25	Epacris obtusifolia	187	311181.28	6214025.18	1	1
Swamp 25	Epacris obtusifolia	188	311174.79	6214030.71	1	1
Swamp 25	Epacris obtusifolia	189	311167.55	6214034.75	1	1
Swamp 25	Epacris obtusifolia	190	311170.04	6214038.65	1	1
Swamp 25	Epacris obtusifolia	191	311160.10	6214043.29	1	1
Swamp 25	Epacris obtusifolia	192	311144.17	6214074.19	1	1
Swamp 25	Epacris obtusifolia	193	311138.06	6214083.13	1	1
Swamp 25	Epacris obtusifolia	194	311130.50	6214090.37	1	1
Swamp 25	Epacris obtusifolia	195	311128.61	6214100.60	1	1
Swamp 25	Epacris obtusifolia	196	311128.01	6214105.65	1	1
Swamp 25	Epacris obtusifolia	190	311133.19	6214118.08	1	1
Swamp 25	-	198	311132.84	6214123.28		
<u> </u>	Epacris obtusifolia Epacris obtusifolia	198	311131.90	6214123.28	1	1 1
Swamp 25	Epacris obtusifolia	1100		6214124.94		
Swamp 25	Epachs obtasijona	1100	311122.50	0214124.94	1	1
Curama 2F	L. Dultangag gristata A 21/	:41	211152 20	6214052.66	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j41	311153.20	6214052.66	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j42	311144.83	6214062.96	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j43	311146.83	6214069.98	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j44	311132.83	6214085.49	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j45	311142.36	6214076.40	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j46	311153.77	6214054.84	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j47	311139.58	6214072.32	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j48	311145.30	6214065.07	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j49	311150.07	6214056.66	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j50	311129.26	6214095.85	5	1
Swamp 25	++Pultenaea aristata ▲ 2V	j51	311146.68	6214072.87	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j52	311148.60	6214059.91	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j53	311134.84	6214082.75	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j54	311153.12	6214050.94	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j55	311122.10	6214097.21	1	1
Swamp 25	++Pultenaea aristata ▲ 2V	j56	311143.58	6214073.80	1	1
Swamp 25	++Pultenaea aristata ▲2V	j57	311125.18	6214103.18	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j58	311140.71	6214077.98	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j59	311137.87	6214080.64	3	1
Swamp 25	++Pultenaea aristata ▲ 2V	j60	311126.77	6214099.19	1	1

NB: Shaded rows indicate dead individuals

Condition Scale: Reproductive Status:

1 = severe damage/dieback 1 = nil

2 = many dead stems
2 = sparse (occasional flowers only)
3 = some dead branches
3 = low (under 25 percent of potential)
4 = minor damage
4 = moderate (25 to 75 percent of potential)
5 = healthy
5 = high (over 75 percent of potential flowering)

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- V: Taxon not presently Endangered, but at risk over a longer period
- ++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Control Sites – Condition and reproductive status for swamp indicator species

	s – Condition and reproduct		1	linates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 101	Epacris obtusifolia	141	308696.94	6216573.06	1	1
Swamp 101	Epacris obtusifolia	142	308698.29	6216572.77	4	1
Swamp 101	Epacris obtusifolia	143	308699.65	6216575.72	4	1
Swamp 101	Epacris obtusifolia	144	308703.22	6216570.71	1	1
Swamp 101	Epacris obtusifolia	145	308706.29	6216567.89	1	1
Swamp 101	Epacris obtusifolia	146	308710.24	6216572.26	4	1
Swamp 101	Epacris obtusifolia	147	308714.22	6216577.04	1	1
Swamp 101	Epacris obtusifolia	148	308720.99	6216580.27	2	1
Swamp 101	Epacris obtusifolia	149	308732	6216587.19	1	1
Swamp 101	Epacris obtusifolia	150	308735.89	6216589.07	3	1
Swamp 101	Epacris obtusifolia	l51	308739.86	6216595.96	1	1
Swamp 101	Epacris obtusifolia	152	308772.54	6216611.41	1	1
Swamp 101	Epacris obtusifolia	153	308775.64	6216619.19	1	1
Swamp 101	Epacris obtusifolia	154	308771.78	6216626.48	1	1
Swamp 101	Epacris obtusifolia	155	308781.96	6216625.59	1	1
Swamp 101	Epacris obtusifolia	156	308788.75	6216627.48	1	1
Swamp 101	Epacris obtusifolia	157	308777.29	6216633.46	3	1
Swamp 101	Epacris obtusifolia	158	308727.68	6216613.98	3	1
Swamp 101	Epacris obtusifolia	159	308720.75	6216619.83	3	1
Swamp 101	Epacris obtusifolia	160	308719.39	6216626.02	1	1
•			I			
Swamp 101	++Pultenaea aristata ▲ 2V	j21	308832.7	6216613.16	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j22	308834.07	6216633.1	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j23	308831.72	6216629.96	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j24	308840.62	6216615.02	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j25	308773.28	6216625.16	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j26	308847.39	6216623.03	2	1
Swamp 101	++Pultenaea aristata ▲ 2V	j27	308836.48	6216637.63	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j28	308786.6	6216631.24	2	1
Swamp 101	++Pultenaea aristata ▲ 2V	j29	308847.25	6216615.33	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j30	308846.08	6216628.88	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j31	308822.35	6216606.11	1	1
Swamp 101	++Pultenaea aristata ≜ 2V	j32	308845.52	6216619.22	1	1
Swamp 101	++Pultenaea aristata ≜ 2V	j33	308814.53	6216599.17	4	1
Swamp 101	++Pultenaea aristata ▲ 2V	j34	308843.93	6216634.7	1	1
Swamp 101	++Pultenaea aristata ≜ 2V	j35	308826.15	6216609.29	1	1
Swamp 101	++Pultenaea aristata ≜ 2V	j36	308799.6	6216629.66	2	1
Swamp 101	++Pultenaea aristata ≜ 2V	j37	308843.86	6216631.98	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j38	308801.91	6216634.58	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j39	308797.82	6216631.93	1	1
Swamp 101	++Pultenaea aristata ▲ 2V	j40	308770.53	6216620.87	1	1
Swamp 101	Sprengelia incarnata	k21	308700.41	6216577.94	1	1
Swamp 101	Sprengelia incarnata	k22	308703.65	6216570.92	1	1
Swamp 101	Sprengelia incarnata	k23	308705.98	6216573.59	1	1
Swamp 101	Sprengelia incarnata	k24	308697.24	6216572.99	1	1
Swamp 101	Sprengelia incarnata	k25	308701.31	6216571.4	1	1
Swamp 101	Sprengelia incarnata	k26	308700.59	6216571.96	1	1
Swamp 101	Sprengelia incarnata	k27	308701.09	6216576.7	4	1
		*				·

Control Sites – Condition and reproductive status for swamp indicator species

			Coord	linates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 101	Sprengelia incarnata	k28	308707.17	6216569.08	1	1
Swamp 101	Sprengelia incarnata	k29	308702.97	6216572.37	1	1
Swamp 101	Sprengelia incarnata	k30	308693.67	6216576.57	1	1
Swamp 101	Sprengelia incarnata	k31	308715.79	6216581.56	1	1
Swamp 101	Sprengelia incarnata	k32	308708.71	6216565.97	1	1
Swamp 101	Sprengelia incarnata	k33	308708.48	6216568.81	1	1
Swamp 101	Sprengelia incarnata	k34	308707.62	6216569.96	1	1
Swamp 101	Sprengelia incarnata	k35	308707.12	6216573.38	1	1
Swamp 101	Sprengelia incarnata	k36	308706.15	6216574.23	5	1
Swamp 101	Sprengelia incarnata	k37	308704.25	6216575.22	1	1
Swamp 101	Sprengelia incarnata	k38	308703.14	6216577.72	1	1
Swamp 101	Sprengelia incarnata	k39	308704.35	6216577.59	1	1
Swamp 101	Sprengelia incarnata	k40	308702.33	6216578.12	3	1
	, ,					
Swamp 111a	Epacris obtusifolia	1101	308879.03	6217102.41	1	1
Swamp 111a	Epacris obtusifolia	1102	308884.33	6217099.34	1	1
Swamp 111a	Epacris obtusifolia	1103	308885.64	6217102.97	2	1
Swamp 111a	Epacris obtusifolia	1104	308889	6217095.55	3	1
Swamp 111a	Epacris obtusifolia	1105	308883.4	6217092.17	1	1
Swamp 111a	Epacris obtusifolia	1106	308880.87	6217085.68	1	1
Swamp 111a	Epacris obtusifolia	1107	308873.96	6217083.2	1	1
Swamp 111a	Epacris obtusifolia	1108	308876.43	6217073.33	1	1
Swamp 111a	Epacris obtusifolia	1109	308881.63	6217062.49	3	2
Swamp 111a	Epacris obtusifolia	l110	308883.68	6217056.98	1	1
Swamp 111a	Epacris obtusifolia	1111	308881.73	6217052	2	1
Swamp 111a	Epacris obtusifolia	l112	308870.83	6217049.36	1	1
Swamp 111a	Epacris obtusifolia	l113	308881.9	6217044.02	1	1
Swamp 111a	Epacris obtusifolia	l114	308882.18	6217040.11	1	1
Swamp 111a	Epacris obtusifolia	l115	308876.55	6217027.23	1	1
Swamp 111a	Epacris obtusifolia	l116	308865.24	6217021.44	1	1
Swamp 111a	Epacris obtusifolia	1117	308865.58	6217003.63	1	1
Swamp 111a	Epacris obtusifolia	l118	308873.01	6217003.43	5	1
Swamp 111a	Epacris obtusifolia	1119	308871.37	6216996.23	1	1
Swamp 111a	Epacris obtusifolia	1120	308866.31	6216985.2	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j61	308882.29	6217106.78	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j62	308885.23	6217110.52	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j63	308874.69	6217092.26	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j64	308874.07	6217086.92	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j65	308857.29	6216994.64	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j66	308859.13	6216988.2	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j67	308883.17	6217077.08	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j68	308887.61	6217090.67	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j69	308882.01	6217102.81	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j70	308877.67	6217099.07	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j71	308883.45	6217070.03	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j72	308870.7	6217018.82	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j73	308889.33	6217103.26	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j74	308866.44	6217011.86	1	1

Control Sites – Condition and reproductive status for swamp indicator species

	Species Tag Coordinates	linates		Reproductive		
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 111a	++Pultenaea aristata ▲ 2V	j75	308864.11	6217006.18	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j76	308883.14	6217114.36	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j77	308858.89	6216981.25	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j78	308890.24	6217115.29	1	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j79	308856.76	6217001.14	3	1
Swamp 111a	++Pultenaea aristata ▲ 2V	j80	308871.34	6217052.52	1	1
•		,	ı			I .
Swamp 125	Epacris obtusifolia	l1	309717.56	6218871.68	3	1
Swamp 125	Epacris obtusifolia	12	309699.12	6218867.19	2	1
Swamp 125	Epacris obtusifolia	13	309695.68	6218858.68	1	1
Swamp 125	Epacris obtusifolia	14	309719.64	6218868.25	1	1
Swamp 125	Epacris obtusifolia	15	309704.76	6218877.7	5	1
Swamp 125	Epacris obtusifolia	16	309714.38	6218871.99	4	1
Swamp 125	Epacris obtusifolia	17	309701.58	6218870.57	1	1
Swamp 125	Epacris obtusifolia	18	309696.02	6218860.99	1	1
Swamp 125	Epacris obtusifolia	19	309701.63	6218865.22	1	1
Swamp 125	Epacris obtusifolia	l10	309704.28	6218860.33	1	1
Swamp 125	Epacris obtusifolia	l11	309697.54	6218855.47	1	1
Swamp 125	Epacris obtusifolia	l12	309708.63	6218861.34	1	1
Swamp 125	Epacris obtusifolia	l13	309694.21	6218852.71	1	1
Swamp 125	Epacris obtusifolia	114	309719.81	6218859.24	1	1
Swamp 125	Epacris obtusifolia	l15	309722.54	6218857.19	1	1
Swamp 125	Epacris obtusifolia	l16	309702.71	6218857.51	2	1
Swamp 125	Epacris obtusifolia	l17	309698.59	6218839.05	1	1
Swamp 125	Epacris obtusifolia	l18	309698.98	6218864.21	3	1
Swamp 125	Epacris obtusifolia	l19	309710.72	6218872.64	1	1
Swamp 125	Epacris obtusifolia	120	309728.52	6218860.19	3	1
			ı			
Swamp 125	Sprengelia incarnata	k1	309696.01	6218850.47	1	1
Swamp 125	Sprengelia incarnata	k2	309688.13	6218853.83	1	1
Swamp 125	Sprengelia incarnata	k3	309711.09	6218865.83	1	1
Swamp 125	Sprengelia incarnata	k4	309699.11	6218852.97	1	1
Swamp 125	Sprengelia incarnata	k5	309695.77	6218854.6	1	1
Swamp 125	Sprengelia incarnata	k6	309692.79	6218852.81	1	1
Swamp 125	Sprengelia incarnata	k7	309698.88	6218841.35	1	1
Swamp 125	Sprengelia incarnata	k8	309698.11	6218855.27	1	1
Swamp 125	Sprengelia incarnata	k9	309710.98	6218867.15	1	1
Swamp 125	Sprengelia incarnata	k10	309707.83	6218868.02	1	1
Swamp 125	Sprengelia incarnata	k11	309691.02	6218855.1	1	1
Swamp 125	Sprengelia incarnata	k12	309702.97	6218856.42	1	1
Swamp 125	Sprengelia incarnata	k13	309690.97	6218854.15	1	1
Swamp 125	Sprengelia incarnata	k14	309696.42	6218847.88	1	1
Swamp 125	Sprengelia incarnata	k15	309695.72	6218843.07	1	1
Swamp 125	Sprengelia incarnata	k16	309703.93	6218856.28	1	1
Swamp 125	Sprengelia incarnata	k17	309695.97	6218851.16	1	1
Swamp 125	Sprengelia incarnata	k18	309693.33	6218847.63	1	1
Swamp 125	Sprengelia incarnata	k19	309709.69	6218868.81	1	1
Swamp 125	Sprengelia incarnata	k20	309704.1	6218861.7	1	1

NB: Shaded rows indicate dead individuals

Condition Scale:

1 = severe damage/dieback

2 = many dead stems

3 = some dead branches

4 = minor damage 5 = healthy Reproductive Status:

1 = nil

2 = sparse (occasional flowers only)

3 = low (under 25 percent of potential)

4 = moderate (25 to 75 percent of potential)

5 = high (over 75 percent of potential flowering)

▲ RoTAP species:

2: Geographic range in Australia less than 100 km

V: Taxon not presently Endangered, but at risk over a longer period

++ Species listed as Vulnerable under NSW Biodiversity Conservation Act (2016) and Commonwealth Environment Protection and Biodiversity Conservation Act (1999)

Appendix F: Vegetation monitoring raw data — Tea tree thicket swamp monitoring sites

F1: Vegetation structure, dominant species and estimated cover for each stratum – Tea tree thicket swamps

Swamp 20 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1	'				
C20T4 O4 420	M1	0.6	3.5	40	Banksia ericifolia subsp. ericifolia, Hakea dactyloides, Leptospermum squarrosum
S20T1Q1A20	L1	0	0.6	10	Xanthorrhoea resinosa, Empodisma minus
C20T4 O2 A20	M1	1.7	4.5	45	Hakea teretifolia, Banksia ericifolia subsp. ericifolia
S20T1Q2A20	L1	0	2	5	Bauera rubioides, Xanthorrhoea resinosa
C20T4 O2 A20	M1	2	6	25	Leptospermum juniperinum, Banksia robur, Hakea teretifolia
S20T1Q3A20	L1	0	2	20	Bauera rubioides, Empodisma minus
C20T4 O 4 4 2 0	M1	1.5	2	10	Banksia robur
S20T1Q4A20	L1	0	1	5	Empodisma minus
C20T1OF A20	M1	1.5	3.5	10	Baeckea linifolia, Leptospermum juniperinum
S20T1Q5A20	L1	0	0.3	5	Bossiaea sp., Empodisma minus
C2074.0.C.4.2.0	M1	1.6	3	15	Hakea teretifolia, Banksia ericifolia subsp. ericifolia, Leptospermum squarrosum
S20T1Q6A20	L1	0	1.5	85	Bauera rubioides, Empodisma minus
C2074 O 7 4 2 0	M1	0.5	2	20	Leptospermum grandifolium, Banksia ericifolia subsp. ericifolia
S20T1Q7A20	L1	0	1	50	Bauera rubioides
Transect 2	·				
C20T2O4 A20	M1	5	5	60	Banksia ericifolia subsp. ericifolia
S20T2Q1A20	L1	0	2	20	Bauera rubioides, Empodisma minus
C20T2O2A20	M1	1.3	6	40	Hakea teretifolia, Leptospermum grandifolium, Melaleuca squarrosa
S20T2Q2A20	L1	0	2.5	90	Bauera rubioides, Gleichenia microphylla, Empodisma minus
C20T202420	M1	2.2	3.5	40	Banksia robur, Hakea teretifolia, Leptospermum juniperinum
S20T2Q3A20	L1	0	2	30	Bauera rubioides, Gleichenia microphylla
520 - 204420	M1	1.6	6	50	Banksia robur, Leptospermum juniperinum, Leptospermum squarrosum
S20T2Q4A20	L1	0	2.5	70	Bauera rubioides, Gleichenia microphylla, Empodisma minus
C20T20F420	M1	1.5	4	60	Banksia robur, Leptospermum juniperinum, Melaleuca squarrosa
S20T2Q5A20	L1	0	2	50	Bauera rubioides, Gleichenia microphylla
C20T20C420	M1	2	4	20	Baeckea linifolia, Banksia robur
S20T2Q6A20	L1	0	2	60	Bauera rubioides, Empodisma minus, Gleichenia dicarpa
	M1	2.5	5	50	Banksia robur, Leptospermum squarrosum, Leptospermum juniperinum
S20T2Q7A20	L1	2	3	80	Bauera rubioides, Gleichenia microphylla
S20T2Q8A20	M1	1.5	3	30	Banksia robur, Melaleuca squarrosa

Swamp 20 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
	L1	0	2.2	90	Bauera rubioides, Gleichenia microphylla, Empodisma minus
C20T200420	M1	1.6	5	20	Leptospermum squarrosum, Melaleuca squarrosa, Baeckea imbricata
S20T2Q9A20	L1	0	2.5	95	Bauera rubioides, Gleichenia microphylla, Gahnia sieberiana
C20T2O10A20	M1	1.5	3	5	Baeckea linifolia, Hakea teretifolia
S20T2Q10A20	L1	0	1.6	80	Bauera rubioides, Gleichenia dicarpa
C20T2O11A20	M1	1.2	4.5	40	Leptospermum juniperinum, Banksia ericifolia subsp. ericifolia, Banksia robur
S20T2Q11A20	L1	0	1.8	40	Gleichenia microphylla, Bauera rubioides, Schoenus melanostachys
C20T2O42A20	M1	3	6	5	Leptospermum juniperinum
S20T2Q12A20	L1	0	1.3	75	Gleichenia microphylla, Bauera rubioides, Gahnia sieberiana
C20T2O42A20	M1	2	4.5	25	Banksia robur, Leptospermum juniperinum
S20T2Q13A20	L1	0	1.2	50	Gleichenia microphylla, Gahnia sieberiana, Bauera rubioides
C20T2O44420	M1	2.5	2.5	1	Banksia robur
S20T2Q14A20	L1	0	1.1	75	Gleichenia microphylla, Gahnia sieberiana
Transect 3					
C20T2O1A20	M1	4	5.5	25	Banksia ericifolia subsp. ericifolia, Melaleuca squarrosa
S20T3Q1A20	L1	0	2.5	30	Bauera rubioides, Gahnia sieberiana, Banksia robur
C20T2O2A20	M1	3	3	5	Banksia robur
S20T3Q2A20	L1	0	2	75	Bauera rubioides
C20T2O2A20	M1	2.2	4	40	Melaleuca squarrosa, Banksia robur
S20T3Q3A20	L1	0	1.8	95	Bauera rubioides, Gahnia sieberiana
C20T2O 4420	M1	1.5	2	10	Banksia robur, Melaleuca squarrosa
S20T3Q4A20	L1	0	1.7	80	Bauera rubioides
C20T2OF 420	M1	3	3	5	Acacia longifolia
S20T3Q5A20	L1	0	2	100	Gahnia sieberiana, Banksia robur, Bauera rubioides, Gleichenia dicarpa
C20T2OC420	M1	1.2	1.2	1	Banksia robur
S20T3Q6A20	L1	0	2	85	Gahnia sieberiana, Gleichenia microphylla, Bauera rubioides
S20T3Q7A20	M1	1.6	3	40	Gleichenia microphylla, Gahnia sieberiana, Bauera rubioides
	L1	0	1.6	65	Leptospermum juniperinum, Banksia robur
C20T200420	M1	3	5	5	Acacia longifolia, Banksia robur, Leptospermum juniperinum
S20T3Q8A20	L1	0	0.1	80	Bauera rubioides, Gleichenia microphylla
S20T3Q9A20	M1	3.5	6	20	Leptospermum juniperinum, Banksia robur

Swamp 20 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
	L1	0	2	20	Bauera rubioides, Gleichenia dicarpa
S20T3Q10A20	M1	2	4	30	Banksia robur, Leptospermum juniperinum
32013Q10A20	L1	0	2.2	80	Bauera rubioides, Gleichenia microphylla
C20T2O11A20	M1	1	2	1	Hakea teretifolia
S20T3Q11A20	L1	0	1.3	75	Gleichenia microphylla, Bauera rubioides, Schoenus melanostachys
C20T2042A20	M1	1.2	4	50	Acacia longifolia, Leptospermum juniperinum, Banksia robur
S20T3Q12A20	L1	0	1.6	60	Gleichenia microphylla, Bauera rubioides
S20T3Q13A20	M1	1.3	5.5	20	Leptospermum juniperinum, Banksia robur
	L1	0	2.5	95	Bauera rubioides, Gleichenia microphylla

Legend:

M1: Mid storey 1 L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

Woronora River 1 – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species		
Transect 1							
	Т	12	12	30	Eucalyptus haemastoma		
WORT1Q1A20	M1	2	5	30	Hakea teretifolia, Banksia ericifolia subsp. ericifolia, Petrophile pulchella		
	L1	0	1.8	5	Lepidosperma limicola, Gleichenia microphylla, Empodisma minus		
WODT102420	M1	1	3.5	40	Melaleuca squarrosa, Banksia ericifolia subsp. ericifolia		
WORT1Q2A20	L1	0	1	5	Gleichenia microphylla, Lepidosperma quadrangulatum		
WORT1Q3A20	L1	0	0.1	1	Empodisma minus		
WODT4 0 4 4 2 0	M1	2	4	10	Leptospermum juniperinum		
WORT1Q4A20	L1	0	0.4	1	Gleichenia microphylla, Lepidosperma quadrangulatum		
WORT1Q5A20	M1	0.4	3	70	Persoonia pinifolia, Hakea teretifolia, Bauera microphylla		
	L1	0	0.3	1	Gleichenia microphylla, Lepidosperma quadrangulatum		
WORT1Q6A20	Т	15	15	5	Eucalyptus sieberi		
	M1	1.8	4	50	Banksia ericifolia subsp. ericifolia, Persoonia pinifolia, Leptospermum juniperinum		
	L1	0	1.6	1	Bauera rubioides, Lepidosperma quadrangulatum		

Legend:

T: Upper storeyM1: Mid storey 1L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

Woronora River South Arm – Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
Transect 1					
WORST 174 04 4 20	M1	1.3	5	50	Banksia ericifolia subsp. ericifolia, Leptospermum grandifolium, Hakea teretifolia
WORSTHT1Q1A20	L1	0	1.5	60	Gleichenia microphylla, Lepidosperma limicola, Chorizandra cymbaria
MODETHT 02420	M1	1.5	3	5	Banksia robur, Leptospermum juniperinum, Hakea teretifolia
WORSTHT1Q2A20	L1	0	1.2	1	Lepidosperma limicola, Empodisma minus, Gleichenia microphylla
MODETHT102420	M1	1.2	2.5	40	Hakea teretifolia, Banksia robur, Epacris paludosa
WORSTHT1Q3A20	L1	0	2	70	Gahnia sieberi, Empodisma minus, Gleichenia microphylla
WORSTHT1Q4A20	M1	2	4	55	Banksia robur, Callistemon citrinus, Leptospermum juniperinum
	L1	0	1.3	15	Gleichenia microphylla, Chorizandra cymbaria, Epacris paludosa
WORSTHT1Q5A20	M1	1.2	2.5	40	Leptospermum juniperinum, Epacris paludosa, Leptospermum grandifolium
	L1	0	2	60	Gahnia sieberi, Chorizandra cymbaria, Gleichenia microphylla
WORSTHT1Q6A20	M1	1.3	4	90	Persoonia pinifolia, Hakea teretifolia, Banksia ericifolia subsp. ericifolia
	L1	0	1.6	5	Gleichenia microphylla, Chorizandra cymbaria, Lepidosperma limicola
WORSTHT1Q7A20	M1	4	6	50	Banksia ericifolia subsp. ericifolia
	L1	0	1.2	5	Gleichenia microphylla, Schoenus brevifolius, Chorizandra cymbaria

Legend:

M1: Mid storey 1 L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

Dahlia Swamp – Vegetation structure, dominant species, and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species		
Transect 1							
DALIT4.04.420	M1	1.2	3	40	Callistemon citrinus, Epacris paludosa, Hakea teretifolia		
DAHT1Q1A20	L1	0	2	60	Gleichenia microphylla, Empodisma minus, Baumea sp.		
DAHT1Q2A20	M1	1.5	3.5	35	Melaleuca squarrosa, Banksia robur, Hakea teretifolia		
DAHTIQZAZU	L1	0	1.6	75	Gleichenia microphylla, Schoenus brevifolius		
DAHT1Q3A20	M1	1.1	3	50	Hakea teretifolia, Callistemon citrinus		
DAHTIQ3AZU	L1	0	1.8	80	Gleichenia microphylla, Lepidosperma limicola		
DAHT1Q4A20	M1	1.3	3	10	Melaleuca squarrosa, Banksia robur		
DAHT1Q4A20	L1	0	1.6	50	Gleichenia microphylla, Chorizandra cymbaria		
DAHT1Q5A20	M1	2	4	30	Melaleuca squarrosa, Leptospermum juniperinum, Banksia robur		
DAHTIQSAZU	L1	0	1.2	90	Gleichenia microphylla		
DAHT1Q6A20	M1	1.7	5	55	Melaleuca squarrosa, Leptospermum grandifolium		
DAHTIQOAZU	L1	0	1	15	Gleichenia microphylla, Chorizandra cymbaria		
DAHT1Q7A20	M1	0.2	4	40	Callistemon citrinus, Leptospermum juniperinum, Melaleuca squarrosa		
DAHTIQ/AZU	L1	0	1.1	40	Gleichenia microphylla, Baumea sp.		
DAHT1Q8A20	M1	0.4	4	40	Banksia robur, Leptospermum juniperinum		
DAHTIQOAZU	L1	0	1.4	90	Gleichenia microphylla, Veronica plebeia, Empodisma minus		
DAHT1Q9A20	M1	2.5	4	35	Callistemon citrinus, Leptospermum juniperinum		
DAHTIQ9AZU	L1	0	2	95	Gleichenia microphylla, Sporadanthus gracilis		
DALIT4.040A20	M1	2.5	4	10	Melaleuca squarrosa, Banksia robur		
DAHT1Q10A20	L1	0	1.8	95	Gleichenia microphylla		
DAHT1Q11A20	M1	1.3	2.1	5	Acacia sp., Banksia robur		
DAITIQITAZU	L1	0	1.5	65	Gleichenia microphylla		

Legend:

M1: Mid storey 1 L1: Lower stratum 1

Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur.

Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

F2: Estimated cover/abundance data – Tea tree thicket swamps

Tea Tree Thicket monitoring sites – Autumn 2020 Swamp 20 – Vegetation cover/abundance

		Tran	sect 1					Tran	sect 2													Trans	ect3											
Family	Species	SZOTIQIAZO	OCASOLIOS OCASOLIOS	SOUTOWAN	CAQUIOS SOUTH	SZOTICGAZO	SZOTICZ/AZO	SZOTZCJAZO	SZOTZQZAZO	2012Q8A20	201204420	2012Q5A20	20120,6420	201207/420	2012Q8420	201209420	2012010420	2012011/20	20120212420	SZOTZQ13AZO	2012014420	SOTECIAZO	201302/420	2013Q8A20	SZOTBOAMZO	20130,5420	20130,6420	2013Q7A20	20130,8420	201309420	2013010420	20130,11420	2013Q12A20	OCASIO FIDE
Colchicaceae	Burchardia umbellata	0,		, ,			0,	1				•	•	•				•	•	0,	0,	0,		•	0,		•	0,					O)	
Cunoniaceae	Bauera rubioides		2 4	4		6	6	4	7	4	6	5	6	7	7	7	7	4	4	1		4	6	7	7	5	4	2	7	7	7	5	4	6
	Baumea sp.	1			1			1									1														1	1		
	Chorizandra cymbaria		1																															
Grommo	Gahnia sieberiana														1	1			4	4	1	1		1		5	5	4				1	2	1
Cyperaceae	Lepidospermaneesii	1																																
	Ptilothrix deusta	1																																
	Schoenusmelanostachys																	3														2		
Droseraceae	Drosera binata			1																														
Frimana	Epacris obtusifolia					2																												
Ericaceae	Sprengelia incamata					1																												
Fabaceae (Faboideae)	Bossiaea sp.				3																													
Fabaceae (Mimosoideae)	Acacia longifolia subsp. longifolia									1														4	1	4			3				5	
Gleicheniaceae	Gleichenia dicarpa			1																														
GIEIU IEI IIduede	Gleicheniamiarophylla								2	3	2	4	3	1	4	4	4	5	6	5	7		1	4		5	4	5	1	5	4	5	5	4
	Baedkea linifolia			2	4	4	1			1	3		4	2		4	4																	1
	Callistemon citrinus	1			1	1							1			2		1																
	Eucalyptus piperita			1																														
Myrtaceae	Leptospernumgrandifolium					1	4		4																									
•	Leptospermum juniperinum		!	5	4		1		1	4	4	4		3				5	1	4				1				5	1	4	4		5	
	Leptospermum squarrosum	4				1					4			4		4				1														
	Melaleuca squarrosa								4	1	2	4		2	4	4						4	1	5	1						1			
Poaceae	Tetranhena turfosa				1																													
	Banksia ericifolia subsp. ericifolia	5	5		1	4	4	6	1	1						1	1	4				4												
	Banksia robur		1 4	4 4	1				2	4	5	5	1	5	4	1	1	4	2	4	1	1	1	4	4	5	1	4	1	1	4		4	7
Destauran	Hakea daatyloides	4																																
Proteaceae	Hakea teretifolia		5	2		4			4	4		1					4															1		
	Persoonia pinifolia		4						1																									
	Petrophile pulchella							1																										
Doctionacca	Empodismaminus	2	1 3	3 3	2	3		1	2	1	2	1	3		2																			
Restionaceae	Leptocarpus tenax		1																															
Xanthorrhoeaceae	Xanthorhoea resinosa	4	1																															
TOTAL	'	9	9 (5 5	9	10	5	6	10	10	8	7	6	7	6	9	7	7	5	6	3	5	4	7	4	5	4	5	5	4	6	6	6	F

Cover Abundance Scale (Modified Braun Blanquet):
1 = cover less than 5% of site and rare
2 = cover less than 5% of site and uncommon
3 = cover of less than 5% and common
4 = cover of 5-20% of site
5 = cover of 21-50% of site
6 = cover of 51-75% of site
7 = cover of greater than 75%

Woronora River 1 – Vegetation cover/abundance

				Trans	sect 1		
Family	Species	WORT1Q1A20	WORT1Q2A20	WORT1Q3A20	WORT1Q4A20	WORT1Q5A20	WORT1Q6A20
Cunoniaceae	Bauera rubioides					3	3
Cumaragaa	Lepidosperma limicola	3	1				
Cyperaceae	Lepidosperma quadrangulatum	3	3		2	1	2
Fabaceae (Mimosoideae)	Acacia sp.				1		
Gleicheniaceae	Gleichenia microphylla	3	3		2	2	
	Eucalyptus haemastoma	4					
NA water a second	Eucalyptus sieberi						1
Myrtaceae	Leptospermum juniperinum				4		4
	Melaleuca squarrosa		5				
	Banksia ericifolia subsp. ericifolia	3	1				4
	Banksia robur				1		
Proteaceae	Hakea teretifolia	4				4	
	Persoonia pinifolia					6	4
	Petrophile pulchella	2					
Restionaceae	Empodisma minus	3	1	1			
TOTAL		8	6	1	5	5	6

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

Woronora River south arm – Vegetation cover/abundance

					Transect 1	Ĺ		
Family	Species	WORSTHT1Q1A20	WORSTHT1Q2A20	WORSTHT1Q3A20	WORSTHT1Q4A20	WORSTHT1Q5A20	WORSTHT1Q6A20	WORSTHT1Q7A20
Casuarinaceae	Allocasuarina littoralis	4						
Cunoniaceae	Bauera microphylla	3						
	Chorizandra cymbaria	3	1	2	3	4	3	2
	Gahnia sieberi			6		5		
Cumorosoo	Lepidosperma limicola	3	3				2	
Cyperaceae	Lepidosperma neesii	2						2
	Ptilothrix deusta							1
	Schoenus brevifolius		1	2			1	3
Ericaceae	Epacris paludosa			2	3	4	1	
Gleicheniaceae	Gleichenia microphylla	5	3	5	4	4	3	2
	Callistemon citrinus				4			
N 4	Leptospermum grandifolium	5			1	4	4	
Myrtaceae	Leptospermum juniperinum		1		4	4	3	
	Melaleuca squarrosa				1			
Poaceae	Tetrarrhena turfosa					1		
	Banksia ericifolia subsp. ericifolia	5					5	6
	Banksia oblongifolia	3						
Ductoro	Banksia robur		2	4	5	3	1	
Proteaceae	Grevillea oleoides	2						
	Hakea teretifolia	4	1	5			5	1
	Persoonia pinifolia						5	
D. His areas	Empodisma minus		3	3	2	2		
Restionaceae	Leptocarpus tenax	2		2				
Xanthorrhoeaceae	Xanthorrhoea resinosa							1
TOTAL		12	8	9	9	9	11	8

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%

Dahlia Swamp – Vegetation cover/abundance

Family	Species	DAHT1Q1A20	DAHT1Q2A20	DAHT1Q3A20	DAHT1Q4A20	DAHT1Q5A20	DAHT1Q6A20	DAHT1Q7A20	DAHT1Q8A20	DAHT1Q9A20	DAHT1Q10A20	DAHT1Q11A20
Apiaceae	Hydrocotyle laxiflora							3				
Asteraceae	Conyza sp.*							1				
	Chorizandra cymbaria	2	1	1	2	1	2	2	3	2	1	
	Lepidosperma limicola	3	2	3								
Cyperaceae	Schoenus brevifolius		3	1								
	Tetraria capillaris							2				
	Baumea sp.	3	2	2	2			3				
Dicksoniaceae	Calochlaena dubia							2				
Dryopteridaceae	Lastreopsis sp.							1				
Ericaceae	Epacris paludosa	4			1							
Fabaceae (Mimosoideae)	Acacia rubida											1
Gleicheniaceae	Gleichenia microphylla	5	6	6	6	7	4	5	7	7	7	6
Haloragaceae	Gonocarpus micranthus							2				
	Baeckea linifolia				1						1	1
	Callistemon citrinus	5	1	5			1	5		5	1	
Myrtaceae	Leptospermum grandifolium				1		4		1			
	Leptospermum juniperinum		3			4	1	4	5	4		1
	Melaleuca squarrosa		5		4	4	6	4		1	4	
Plantaginaceae	Veronica plebeia								4			
	Entolasia stricta	1										
Poaceae	Plinthanthesis paradoxa		1									
	Tetrarrhena turfosa							2				
	Banksia ericifolia subsp. ericifolia		1									
Proteaceae	Banksia robur	2	4		4	4			5	1	1	1
	Hakea teretifolia	4	4	5								
	Baloskion gracile							1				
	Empodisma minus	3		2	2			1	3			
Restionaceae	Eurychorda complanata	1										
	Leptocarpus tenax	1		2								
	Sporadanthus gracilis									4		
TOTAL	·	12	12	9	9	5	6	15	7	7	6	5

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%
- * Non-native species

F3: Vegetation condition – Tea tree thicket swamps

Tea Tree Thicket monitoring sites – Autumn 2020Swamp 20 – Vegetation condition

Surresponded Control Contr						Trans	æd1									Tra	nsect	:2											Т	ransec	t3					
Cachinosee Burbachouteklots S S S S S S S S S	Family	Species	2011Q1A20	SOLICEASO	ZOTICBAZO	201104420	201105420	20110,6420	201107/420	201201420	ZOTZQ2AZO	ZOTZQBAZO	201204420	201205420	20120,6420	201207/420	201208420	201209420	2012030420	2012011/420	ZOTZQ12AZ0	2012013420	2012014420	201301/420	ZOTBORAZO	201308420	ZOTBOANZO	20130,5420	20130,6420	201307/420	201308420	201309420	20130,10420	20130,11/420	20130,12420	2013013420
Surresponded Control Contr	Colchicaceae	Burchardia umbellata		()		0)	()	()	0,	5	O ,	()	0 ,	()	O ,	· ·	()	0 ,	()	()	()	U)	()	()	U)	()	()	O ,	U)	0)	()	O)	V)	0)	0)	V)
Cyprocese	Cunoniaceae	Bauera rubioides		5	3			5	5	5	5	5	5	5	5	5	5	5	5	5	5	5		4	5	5	5	5	5	5	5	5	5	5	5	5
Comparation			5				5			5									5														4	5		
Comparation		Chorizandra cymbaria		5																																
Pilothrix desids	G mormono																4	3			5	4	5	5		5		5	4	5				5	4	3
Scherusmetrostachys Diosenational Scherusmetrostachys Diosenational Scherusmetrostachys Scherusmet	Сурегашей	Lepidosperma neesii	4																																	
Disceracione Disceracionato Disceracionato Disceracione Epropos obtusificito Servegia incorrato Serv		Ptilothrix deusta	4																																	
Efracese Fraces chusiplic		Schoenusmelanostachys																		5														5		
Enclose Spergelia instantal	Droseraceae	Drosera binata				5																														
Retacesee (Fatoricitesee) Aracia Ingrigilia Sassieras, Sassier		Epaaris obtusifolia						5																												
Fabocese (Fabocese (Fabo	Ericaceae	Sprengelia incamata						3																												
Fabocese (Minosoidese) Acada Inngifolia Stap, Inngifolia S S S S S S S S S	Fabaceae (Faboideae)						5																													
Geicheniaceae Geicheniaciticipa		Acacia longifolia subsp. longifolia										5														5	5	5			5				5	
Bederlandring	,					5																														
Beelea Inifolia	Gleicheniaœae	Gleichenia microphylla									5	5	5	5	5	5	5	5	5	5	5	4	5		5	5		5	5	4	5	5	4	5	5	5
Mytaceae Callistemancitrinus 5					5		5	5	5			5	5		5	5		5	5																	5
Mytaceae Leptcopermmgrandifolium			5												5					4																
Mytaceae Leptcopermmgrandifolium		Eucalyptus piperita				5																														
Leptospermmy, injectinum	Myrtaceae							5	5		5																									
Leptospernum squarrosum	,	Leptospermum juniperinum			5		5				5	5	5	5		5				5	5	5				5				5	5	5	5		5	5
Metaleuca squariosa			5					4										5																		
Poaceae Tetrorrhera turfosa											5	5	5	5		5	5	5						5	5	5	5						5			
Banksia ericifolia subsp. ericifolia 5 5 5 5 5 5 5 5 5	Poaceae						5																													
Banksia robur			5	5			5	5	5	5	5	5						5	5	5				5												
Proteaceae					5	4							5	4	5	5	5				5	5	5		4	5	4	5	5	5	5	5	5		5	5
Halkea terétifolia			5																																	
Persoonia pinifolia	Proteaceae			5	5			5			5	5		2					5															5		
Petrophile pulchella														_																						
Restionaceae Empodismaminus 3 5 5 4 5 5 5 5 5 5 5 Xanthorrhoeaceae Xanthorrhoea resinosa 4 5		Petrophile pulchella								5	-																									
Restionaceae Leptrocarpus tenax 5 S Santhorrhoeaceae Xanthorrhoeaceae Xanthorrhoeaceae A sonthorrhoeaceae Santhorrhoeaceae Sa	.		3	5	5	4	5	5			5	5	5	5	5		5																	\rightarrow		
Xanthorrhoeaceae Xanthorrhoea resinosa 4 5	Restionaceae									-		-			-		-																	\rightarrow		
	Xanthorrhoeareae		4																															-		
TOTAL 9 9 9 6 5 9 10 5 6 10 10 8 7 6 7 6 9 7 7 5 6 3 5 4 7 4 5 4 5 5 4 6 6 6 6 6	TOTAL	7 6 10 6 11 6 6 1 6 6 1	9	9	6	5	9	10	5	6	10	10	8	7	6	7	6	9	7	7	5	6	3	5	4	7	4	5	4	5	5	4	6	6	6	6

Condition Scale:
1=severedamage/diebadk
2=manydead stems
3=some dead branches
4=minor damage
5=healthy

Woronora River 1 – Vegetation condition

				Tran	sect 1		
Family	Species	WORT1Q1A20	WORT1Q2A20	WORT1Q3A20	WORT1Q4A20	WORT1Q5A20	WORT1Q6A20
Cunoniaceae	Bauera rubioides					5	5
Cumaragaa	Lepidosperma limicola	5	5				
Cyperaceae	Lepidosperma quadrangulatum	5	5		5	5	4
Fabaceae (Mimosoideae)	Acacia sp.				5		
Gleicheniaceae	Gleichenia microphylla	5	5		5	5	
	Eucalyptus haemastoma	5					
N.A. webs as a s	Eucalyptus sieberi						5
Myrtaceae	Leptospermum juniperinum				5		5
	Melaleuca squarrosa		5				
	Banksia ericifolia subsp. ericifolia	5	5				5
	Banksia robur				2		
Proteaceae	Hakea teretifolia	5				5	
	Persoonia pinifolia					5	5
	Petrophile pulchella	5					
Restionaceae	Empodisma minus	5	5	4			
TOTAL		8	6	1	5	5	6

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

Woronora River south arm – Vegetation condition

					Transect	1		
Family	Species	WORSTHT1Q1A20	WORSTHT1Q2A20	WORSTHT1Q3A20	WORSTHT1Q4A20	WORSTHT1Q5A20	WORSTHT1Q6A20	WORSTHT1Q7A20
Casuarinaceae	Allocasuarina littoralis	5						
Cunoniaceae	Bauera microphylla	5						
	Chorizandra cymbaria	4	5	4	5	5	5	5
	Gahnia sieberi			5		5		
Cumorosoo	Lepidosperma limicola	5	4				5	
Cyperaceae	Lepidosperma neesii	5						5
	Ptilothrix deusta							5
	Schoenus brevifolius		5	5			5	5
Ericaceae	Epacris paludosa			5	5	5	3	
Gleicheniaceae	Gleichenia microphylla	5	5	4	5	5	5	5
	Callistemon citrinus				5			
	Leptospermum grandifolium	5			5	5	5	
Myrtaceae	Leptospermum juniperinum		1		5	5	3	
	Melaleuca squarrosa				5			
Poaceae	Tetrarrhena turfosa					5		
	Banksia ericifolia subsp. ericifolia	5					5	5
	Banksia oblongifolia	5						
	Banksia robur		3	5	5	5	5	
Proteaceae	Grevillea oleoides	3						
	Hakea teretifolia	5	1	5			5	5
	Persoonia pinifolia						5	
D. His areas	Empodisma minus		3	5	5	5		
Restionaceae	Leptocarpus tenax	5		5				
Xanthorrhoeaceae	Xanthorrhoea resinosa							5
TOTAL		12	8	9	9	9	11	8

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

Dahlia Swamp – Vegetation condition

						Tr	ansec	t 1				
Family	Species	DAHT1Q1A20	DAHT1Q2A20	DAHT1Q3A20	DAHT1Q4A20	DAHT1Q5A20	DAHT1Q6A20	DAHT1Q7A20	DAHT1Q8A20	DAHT1Q9A20	DAHT1Q10A20	DAHT1Q11A20
Apiaceae	Hydrocotyle laxiflora							5				
Asteraceae	Conyza sp.*							5				
	Baumea sp.	5	5	5	5			5				
	Chorizandra cymbaria	5	5	5	5	5	4	5	5	5	5	
Cyperaceae	Lepidosperma limicola	5	5	5								
	Schoenus brevifolius		5	5								
	Tetraria capillaris							5				
Dicksoniaceae	Calochlaena dubia							5				
Dryopteridaceae	Lastreopsis sp.							5				
Ericaceae	Epacris paludosa	5			5							
Fabaceae (Mimosoideae)	Acacia rubida											5
Gleicheniaceae	Gleichenia microphylla	5	5	5	5	5	4	5	5	5	5	4
Haloragaceae	Gonocarpus micranthus							5				
	Baeckea linifolia				5						5	5
	Callistemon citrinus	5	5	5			5	5		5	5	
Myrtaceae	Leptospermum grandifolium				5		4		5			
	Leptospermum juniperinum		5			5	4	5	5	5		5
	Melaleuca squarrosa		5		5	5	5	5		5	5	
Plantaginaceae	Veronica plebeia								5			
	Entolasia stricta	5										
Poaceae	Plinthanthesis paradoxa		5									
	Tetrarrhena turfosa							5				
	Banksia ericifolia subsp. ericifolia		5									
Proteaceae	Banksia robur	4	5		5	5			5	5	5	5
	Hakea teretifolia	5	5	5								
	Baloskion gracile							5				
	Empodisma minus	5		5	5			5	5			
Restionaceae	Eurychorda complanata	5										
	Leptocarpus tenax	5		5								
	Sporadanthus gracilis									5		
TOTAL		12	12	9	9	5	6	15	7	7	6	5

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy
- * Non-native species

F4: Indicator species data – Tea tree thicket swamps

Condition and Reproductive Rating for Swamp Indicator Species

	eproductive Kating for Swamp			linates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 20	Banksia robur	a1	310455.27	6214361.50	4	1
Swamp 20	Banksia robur	a2	310457.62	6214365.43	5	1
Swamp 20	Banksia robur	a3	310457.02	6214367.13	3	1
Swamp 20	Banksia robur	a4	310469.39	6214365.21	1	1
Swamp 20	Banksia robur	a5	310409.59	6214365.47	1	1
Swamp 20	Banksia robur	a6	310473.00	6214365.71	4	1
Swamp 20	Banksia robur	a0 a7	310478.79	6214367.80	1	1
Swamp 20	Banksia robur	a8	310483.37	6214423.58	1	1
·					4	1
Swamp 20	Banksia robur	a9	310404.70	6214426.77		1
Swamp 20	Banksia robur	a10	310408.89	6214428.39	1	
Swamp 20	Banksia robur	a11	310411.65	6214429.69	4	1
Swamp 20	Banksia robur	a12	310415.88	6214430.45	1	1
Swamp 20	Banksia robur	a13	310417.48	6214426.24	3	1
Swamp 20	Banksia robur	a14	310408.44	6214366.91	2	1
Swamp 20	Banksia robur	a15	310415.27	6214370.30	3	1
Swamp 20	Banksia robur	S16	310427.11	6214373.83	4	1
Swamp 20	Banksia robur	a17	310434.27	6214377.25	5	1
Swamp 20	Banksia robur	a18	310442.16	6214384.23	4	1
Swamp 20	Banksia robur	a19	310450.01	6214386.53	3	1
Swamp 20	Banksia robur	a20	310459.13	6214393.03	5	1
Swamp 20	Callistemon citrinus	c1	310391.07	6214390.86	5	1
Swamp 20	Callistemon citrinus	c2	310395.09	6214394.83	4	1
Swamp 20	Callistemon citrinus	c3	310385.00	6214401.00	5	1
Swamp 20	Callistemon citrinus	c4	310400.15	6214426.90	5	1
Swamp 20	Callistemon citrinus	c5	310403.61	6214426.85	4	1
Swamp 20	Callistemon citrinus	c6	310411.33	6214429.85	4	1
Swamp 20	Callistemon citrinus	с7	310418.36	6214430.04	4	1
Swamp 20	Callistemon citrinus	c8	310438.34	6214412.51	4	1
Swamp 20	Callistemon citrinus	c9	310454.99	6214401.25	5	1
Swamp 20	Callistemon citrinus	c10	310457.79	6214389.93	4	1
Swamp 20	Callistemon citrinus	c11	310449.97	6214386.13	5	1
Swamp 20	Callistemon citrinus	c12	310444.84	6214382.19	3	1
Swamp 20	Callistemon citrinus	c13	310431.90	6214374.82	3	1
Swamp 20	Callistemon citrinus	c14	310447.12	6214385.93	4	1
Swamp 20	Callistemon citrinus	c15	310438.75	6214382.02	4	1
Swamp 20	Callistemon citrinus	c16	310419.77	6214425.95	5	1
Swamp 20	Callistemon citrinus	c17	310398.51	6214433.92	5	1
Swamp 20	Callistemon citrinus	c18	310398.09	6214435.40	5	1
Swamp 20	Callistemon citrinus	c19	310397.50	6214431.03	5	1
Swamp 20	Callistemon citrinus	c20	310402.71	6214422.51	5	1
	- Camatanian Chimas	1 020	1 323 102.71	0221122.51		<u> </u>
Swamp 20	Leptospermum juniperinum	b1	310401.96	6214425.99	4	1
Swamp 20	Leptospermum juniperinum	b2	310405.89	6214424.43	3	1
Swamp 20	Leptospermum juniperinum	b3	310409.68	6214427.19	1	1
Swamp 20	Leptospermum juniperinum	b4	310409.08	6214428.34	1	1
Swamp 20	Leptospermum junipermum	b5	310412.43	6214429.64	5	1
Swamp 20		b6	310417.16	6214426.19	5	1
· ·	Leptospermum juniperinum			<u> </u>		
Swamp 20	Leptospermum juniperinum	b7	310413.32	6214368.93	4	1

Condition and Reproductive Rating for Swamp Indicator Species

			Coord	linates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Swamp 20	Leptospermum juniperinum	b8	310423.37	6214371.53	4	1
Swamp 20	Leptospermum juniperinum	b9	310439.99	6214380.02	5	1
Swamp 20	Leptospermum juniperinum	b10	310445.23	6214384.01	5	1
Swamp 20	Leptospermum juniperinum	b11	310452.15	6214388.96	5	1
Swamp 20	Leptospermum juniperinum	b12	310460.69	6214395.22	5	1
Swamp 20	Leptospermum juniperinum	b13	310468.02	6214367.89	5	1
Swamp 20	Leptospermum juniperinum	b14	310468.09	6214372.94	1	1
Swamp 20	Leptospermum juniperinum	b15	310433.42	6214360.21	1	1
Swamp 20	Leptospermum juniperinum	b16	310433.42	6214361.07	5	1
Swamp 20	Leptospermum juniperinum	b17	310429.03	6214358.08	4	1
Swamp 20	Leptospermum juniperinum	b18	310431.14	6214359.54	5	1
Swamp 20	Leptospermum juniperinum	b19	310431.14	6214371.19	1	1
Swamp 20	Leptospermum juniperinum	b20	310477.20	6214365.41	5	1
Swamp 20	Leptospermum jumpermum	520	310443.44	0214303.41		
Woronora River 1	Banksia robur	a41	306401.70	6214962.98	1	1
	Banksia robur				5	1
Woronora River 1		a42	306407.92	6214965.22		
Woronora River 1	Banksia robur	a43	306404.19	6214974.24	1	1
Woronora River 1	Banksia robur	a44	306419.95	6214966.04	1	1
Woronora River 1	Banksia robur	a45	306419.00	6214976.87	1	1
Woronora River 1	Banksia robur	a46	306414.62	6214957.67	4	1
Woronora River 1	Banksia robur	a47	306409.14	6214956.21	4	1
Woronora River 1	Banksia robur	a48	306423.67	6214951.13	1	1
Woronora River 1	Banksia robur	a49	306428.82	6214945.20	3	1
Woronora River 1	Banksia robur	a50	306431.82	6214934.92	4	1
Woronora River 1	Banksia robur	a51	306434.41	6214924.93	5	1
Woronora River 1	Banksia robur	a52	306427.73	6214912.51	1	1
Woronora River 1	Banksia robur	a53	306427.12	6214906.48	3	1
Woronora River 1	Banksia robur	a54	306431.52	6214892.40	5	1
Woronora River 1	Banksia robur	a55	306434.82	6214875.09	4	1
Woronora River 1	Banksia robur	a56	306424.89	6214882.73	4	1
Woronora River 1	Banksia robur	a57	306419.65	6214892.85	5	1
Woronora River 1	Banksia robur	a58	306411.72	6214874.18	1	1
Woronora River 1	Banksia robur	a59	306420.26	6214869.80	1	1
Woronora River 1	Banksia robur	a60	306417.93	6214873.32	3	1
Woronora River 1	Callistemon citrinus	c41	306401.96	6214970.47	5	1
Woronora River 1	Callistemon citrinus	c42	306400.42	6214971.53	5	1
Woronora River 1	Callistemon citrinus	c43	306417.54	6214974.53	5	1
Woronora River 1	Callistemon citrinus	c44	306434.12	6214937.53	5	1
Woronora River 1	Callistemon citrinus	c45	306429.56	6214936.66	1	1
Woronora River 1	Callistemon citrinus	c46	306432.67	6214913.81	5	1
Woronora River 1	Callistemon citrinus	c47	306435.93	6214898.93	4	1
Woronora River 1	Callistemon citrinus	c48	306423.54	6214886.18	5	1
Woronora River 1	Callistemon citrinus	c49	306416.34	6214877.50	5	1
Woronora River 1	Callistemon citrinus	c50	306428.78	6214885.46	5	1
Woronora River 1	Callistemon citrinus	c51	306445.06	6214897.96	3	1
Woronora River 1	Callistemon citrinus	c52	306439.92	6214899.70	5	1
		_				
Woronora River 1	Callistemon citrinus	c53	306431.61	6214865.05	4	1

Condition and Reproductive Rating for Swamp Indicator Species

Cito	Constant	-	Coord	linates	Condition	Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Woronora River 1	Callistemon citrinus	c55	306434.79	6214891.97	5	1
Woronora River 1	Callistemon citrinus	c56	306435.89	6214894.20	5	1
Woronora River 1	Callistemon citrinus	c57	306439.85	6214903.03	5	1
Woronora River 1	Callistemon citrinus	c58	306438.61	6214920.13	5	1
Woronora River 1	Callistemon citrinus	c59	306438.42	6214920.80	3	1
Woronora River 1	Callistemon citrinus	c60	306427.60	6214951.55	5	1
	1	1				<u> </u>
Woronora River 1	Leptospermum juniperinum	b41	306439.60	6214936.06	1	1
Woronora River 1	Leptospermum juniperinum	b42	306436.96	6214929.93	1	1
Woronora River 1	Leptospermum juniperinum	b43	306436.94	6214922.13	5	1
Woronora River 1	Leptospermum juniperinum	b44	306443.17	6214912.99	4	1
Woronora River 1	Leptospermum juniperinum	b45	306439.63	6214908.47	1	1
Woronora River 1	Leptospermum juniperinum	b46	306437.11	6214900.04	5	1
Woronora River 1	Leptospermum juniperinum	b47	306447.18	6214894.70	1	1
Woronora River 1	Leptospermum juniperinum	b48	306442.37	6214888.69	1	1
Woronora River 1	Leptospermum juniperinum	b49	306442.93	6214884.36	5	1
Woronora River 1	Leptospermum juniperinum	b50	306436.15	6214882.01	5	1
Woronora River 1	Leptospermum juniperinum	b51	306432.03	6214867.55	4	1
Woronora River 1	Leptospermum juniperinum	b52	306423.65	6214875.75	1	1
Woronora River 1		b53	306418.08	6214883.74	1	1
Woronora River 1	Leptospermum juniperinum	b54	306426.43	6214885.20	4	1
	Leptospermum juniperinum					
Woronora River 1	Leptospermum juniperinum	b55	306418.92	6214893.11	5	1
Woronora River 1	Leptospermum juniperinum	b56	306419.74	6214886.73	4	1
Woronora River 1	Leptospermum juniperinum	b57	306416.18	6214886.93	5	1
Woronora River 1	Leptospermum juniperinum	b58	306419.65	6214877.42	1	1
Woronora River 1	Leptospermum juniperinum	b59	306416.20	6214868.25	1	1
Woronora River 1	Leptospermum juniperinum	b60	306418.71	6214872.68	5	1
NA/ Countle Asses	Baratain as hara	- 24	200400.00	6242044.40	2	
Woronora South Arm	Banksia robur	a21	306406.69	6213941.19	3	1
Woronora South Arm	Banksia robur	a22	306411.29	6213946.13	3	1
Woronora South Arm	Banksia robur	a23	306414.41	6213950.56	4	1
Woronora South Arm	Banksia robur	a24	306425.46	6213958.65	1	1
Woronora South Arm	Banksia robur	a25	306425.28	6213950.71	4	1
Woronora South Arm	Banksia robur	a26	306430.15	6213944.57	2	1
Woronora South Arm	Banksia robur	a27	306433.83	6213944.62	1	1
Woronora South Arm	Banksia robur	a28	306433.77	6213939.06	2	1
Woronora South Arm	Banksia robur	a29	306431.10	6213934.79	4	1
Woronora South Arm	Banksia robur	a30	306436.40	6213926.17	4	1
Woronora South Arm	Banksia robur	a31	306439.87	6213923.56	5	1
Woronora South Arm	Banksia robur	a32	306438.50	6213918.00	3	1
Woronora South Arm	Banksia robur	a33	306434.61	6213916.78	4	1
Woronora South Arm	Banksia robur	a34	306429.51	6213920.71	4	1
Woronora South Arm	Banksia robur	a35	306427.73	6213921.53	5	1
Woronora South Arm	Banksia robur	a36	306423.98	6213922.93	4	1
Woronora South Arm	Banksia robur	a37	306419.51	6213928.79	4	1
Woronora South Arm	Banksia robur	a38	306414.11	6213937.56	5	1
Woronora South Arm	Banksia robur	a39	306410.99	6213937.46	3	1
Woronora South Arm	Banksia robur	a40	306405.39	6213939.72	1	1

Condition and Reproductive Rating for Swamp Indicator Species

S.L.			Coord	linates	0 - 111	Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Woronora South Arm	Callistemon citrinus	c21	306408.01	6213944.25	5	1
Woronora South Arm	Callistemon citrinus	c22	306421.87	6213957.30	5	1
Woronora South Arm	Callistemon citrinus	c23	306427.84	6213946.92	4	1
Woronora South Arm	Callistemon citrinus	c24	306427.10	6213942.16	4	1
Woronora South Arm	Callistemon citrinus	c25	306434.06	6213937.33	4	1
Woronora South Arm	Callistemon citrinus	c26	306436.15	6213932.97	4	1
Woronora South Arm	Callistemon citrinus	c27	306434.43	6213929.13	4	1
Woronora South Arm	Callistemon citrinus	c28	306438.52	6213923.15	4	1
Woronora South Arm	Callistemon citrinus	c29	306417.65	6213935.40	5	1
Woronora South Arm	Callistemon citrinus	c30	306432.75	6213918.33	5	1
Woronora South Arm	Callistemon citrinus	c31	306409.88	6213954.72	5	1
Woronora South Arm	Callistemon citrinus	c32	306408.64	6213956.81	4	1
Woronora South Arm	Callistemon citrinus	c33	306418.10	6213964.33	4	1
Woronora South Arm	Callistemon citrinus	c34	306417.39	6213967.54	5	1
Woronora South Arm	Callistemon citrinus	c35	306414.54	6213972.55	4	1
Woronora South Arm	Callistemon citrinus	c36	306414.92	6213971.23	5	1
Woronora South Arm	Callistemon citrinus	c37	306413.26	6213972.52	4	1
Woronora South Arm	Callistemon citrinus	c38	306421.80	6213975.70	5	1
Woronora South Arm	Callistemon citrinus	c39	306430.51	6213976.11	2	1
Woronora South Arm	Callistemon citrinus	c40	306429.30	6213978.34	3	1
Wording a South 7 time	camsternon citimas	1 0.10	300 123.30	0213370.31		_
Woronora South Arm	Leptospermum juniperinum	b21	306405.10	6213950.32	1	1
Woronora South Arm	Leptospermum juniperinum	b22	306409.63	6213955.93	5	1
Woronora South Arm	Leptospermum juniperinum	b23	306413.08	6213961.84	3	1
Woronora South Arm	Leptospermum juniperinum	b24	306416.14	6213964.15	1	1
Woronora South Arm	Leptospermum juniperinum	b25	306420.73	6213965.82	5	1
Woronora South Arm	Leptospermum juniperinum	b26	306425.59	6213967.32	1	1
Woronora South Arm	Leptospermum juniperinum	b27	306419.34	6213972.21	3	1
Woronora South Arm	Leptospermum juniperinum	b28	306415.96	6213973.93	3	1
Woronora South Arm	Leptospermum juniperinum	b29	306413.38	6213971.53	1	1
Woronora South Arm	Leptospermum juniperinum	b30	306408.45	6213971.05	4	1
Woronora South Arm	Leptospermum juniperinum	b30	306419.78	6213971.03	4	1
Woronora South Arm	Leptospermum juniperinum	b31	306426.01	6213979.80	4	1
Woronora South Arm	Leptospermum juniperinum		306423.06	6213984.23		
Woronora South Arm	Leptospermum juniperinum	b33	 	6213985.68	4	1
Woronora South Arm		_	306419.58 306420.84		5	1
Woronora South Arm	Leptospermum juniperinum	b35	 	6213991.77		1
	Leptospermum juniperinum	b36	306419.52	6213998.72	3	1
Woronora South Arm	Leptospermum juniperinum Leptospermum juniperinum	b37	306423.52	6213971.34	3	1
Woronora South Arm	1 1 1 1	b38	306412.54	6213969.16	4	1
Woronora South Arm	Leptospermum juniperinum	b39	306408.15	6213974.08	3	1
Woronora South Arm	Leptospermum juniperinum	b40	306409.23	6213964.11	4	1
Dahlia Swama	Panksia rohur	261	206120.20	6212062.20	г	1
Dahlia Swamp	Banksia robur	a61	306129.26	6212863.29	5	1
Dahlia Swamp	Banksia robur	a62	306134.54	6212866.25	5	1
Dahlia Swamp	Banksia robur	a63	306132.78	6212870.01	5	1
Dahlia Swamp	Banksia robur	a64	306127.95	6212871.72	1	1
Dahlia Swamp	Banksia robur	a65	306125.30	6212876.39	4	1
Dahlia Swamp	Banksia robur	a66	306123.34	6212877.65	1	1
Dahlia Swamp	Banksia robur	a67	306122.03	6212880.57	5	1

Condition and Reproductive Rating for Swamp Indicator Species

Site	Species	Tag	Coord	linates	Condition	Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Dahlia Swamp	Banksia robur	a68	306119.44	6212882.36	4	1
Dahlia Swamp	Banksia robur	a69	306112.90	6212885.99	5	1
Dahlia Swamp	Banksia robur	a70	306112.61	6212888.50	3	1
Dahlia Swamp	Banksia robur	a71	306115.38	6212893.47	5	1
Dahlia Swamp	Banksia robur	a72	306120.71	6212897.02	1	1
Dahlia Swamp	Banksia robur	a73	306125.45	6212892.84	1	1
Dahlia Swamp	Banksia robur	a74	306119.46	6212886.20	4	1
Dahlia Swamp	Banksia robur	a75	306122.35	6212884.16	5	1
Dahlia Swamp	Banksia robur	a76	306126.69	6212880.57	5	1
Dahlia Swamp	Banksia robur	a77	306134.99	6212874.83	4	1
Dahlia Swamp	Banksia robur	a78	306136.14	6212871.66	4	1
Dahlia Swamp	Banksia robur	a79	306150.43	6212867.42	1	1
Dahlia Swamp	Banksia robur	a80	306139.36	6212861.48	4	1
	'					
Dahlia Swamp	Callistemon citrinus	c61	306130.47	6212864.63	5	1
Dahlia Swamp	Callistemon citrinus	c62	306136.08	6212869.24	5	1
Dahlia Swamp	Callistemon citrinus	c63	306129.3	6212874.48	5	1
Dahlia Swamp	Callistemon citrinus	c64	306117.94	6212878.38	5	1
Dahlia Swamp	Callistemon citrinus	c65	306122.20	6212898.73	5	1
Dahlia Swamp	Callistemon citrinus	c66	306130.24	6212875.94	5	1
Dahlia Swamp	Callistemon citrinus	c67	306134.07	6212874.14	5	1
Dahlia Swamp	Callistemon citrinus	c68	306137.69	6212871.37	4	1
Dahlia Swamp	Callistemon citrinus	c69	306150.27	6212867.68	5	1
Dahlia Swamp	Callistemon citrinus	c70	306147.14	6212864.33	5	1
Dahlia Swamp	Callistemon citrinus	c71	306127.46	6212862.59	4	1
Dahlia Swamp	Callistemon citrinus	c72	306134.04	6212863.52	5	1
Dahlia Swamp	Callistemon citrinus	c73	306116.73	6212879.65	5	1
Dahlia Swamp	Callistemon citrinus	c74	306116.94	6212887.24	5	1
Dahlia Swamp	Callistemon citrinus	c75	306133.45	6212879.31	5	1
Dahlia Swamp	Callistemon citrinus	c76	306135.40	6212872.90	4	1
Dahlia Swamp	Callistemon citrinus	c77	306141.41	6212868.85	5	1
Dahlia Swamp	Callistemon citrinus	c78	306153.46	6212875.00	5	1
Dahlia Swamp	Callistemon citrinus	c79	306164.34	6212866.90	5	1
Dahlia Swamp	Callistemon citrinus	c80	306151.94	6212848.69	5	1
Jaa Gwap	Cameterner etermae	1 000		02220 :0:00		_
Dahlia Swamp	Leptospermum juniperinum	b61	306125.84	6212862.59	4	1
Dahlia Swamp	Leptospermum juniperinum	b62	306131.98	6212862.11	4	1
Dahlia Swamp	Leptospermum juniperinum	b63	306134.30	6212868.23	5	1
Dahlia Swamp	Leptospermum juniperinum	b64	306130.34	6212870.05	3	1
Dahlia Swamp	Leptospermum juniperinum	b65	306127.42	6212875.87	3	1
Dahlia Swamp	Leptospermum juniperinum	b66	306120.77	6212875.74	4	1
Dahlia Swamp	Leptospermum juniperinum	b67	306120.77	6212878.90	1	1
Dahlia Swamp	Leptospermum juniperinum	b68	306117.00	6212885.35	4	1
Dahlia Swamp	Leptospermum juniperinum	b69	306123.19	6212888.75	1	1
Dahlia Swamp	Leptospermum juniperinum	b70	306129.90	6212883.23	1	1
Dahlia Swamp	Leptospermum juniperinum	b71	306133.54	6212877.43	5	1
Dahlia Swamp	Leptospermum juniperinum	b71	306135.34	6212877.77	3	1
Dahlia Swamp	Leptospermum juniperinum	b73	306158.83	6212870.30	1	1
•		_				
Dahlia Swamp	Leptospermum juniperinum	b74	306154.18	6212861.01	3	1

Condition and Reproductive Rating for Swamp Indicator Species

Site	Species	Too	Coord	linates	Condition	Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
Dahlia Swamp	Leptospermum juniperinum	b75	306152.04	6212847.75	2	1
Dahlia Swamp	Leptospermum juniperinum	b76	306145.25	6212843.91	5	1
Dahlia Swamp	Leptospermum juniperinum	b77	306137.61	6212847.82	3	1
Dahlia Swamp	Leptospermum juniperinum	b78	306135.85	6212856.40	5	1
Dahlia Swamp	Leptospermum juniperinum	b79	306132.39	6212848.43	4	1
Dahlia Swamp	Leptospermum juniperinum	b80	306128.16	6212855.34	1	1

NB: Shaded rows indicate dead individuals

Condition Scale: Reproductive Status:

1 = severe damage/dieback 1 = nil

2 = many dead stems
2 = sparse (occasional flowers only)
3 = some dead branches
3 = low (under 25 percent of potential)
4 = minor damage
4 = moderate (25 to 75 percent of potential)
5 = healthy
5 = high (over 75 percent of potential flowering)

Appendix G: Riparian vegetation monitoring raw data

G1: Vegetation structure, dominant species and estimated cover for each stratum – Riparian sites

Vegetation structure, dominant species and estimated cover for each stratum

Site Number	Stratum	Lower Height (m)	Upper Height (m)	Percent Cover (%)	Dominant Species
	T	10	12	5	Eucalyptus sieberi
NADIDO4 A 20	M2	0.5	2.5	40	Acacia obtusifolia, Lomatia myricoides, Tristania neriifolia
MRIP01A20	M1	3	6	25	Allocasuarina littoralis, Banksia ericifolia subsp. ericifolia
	L1	0	0.5	40	Eurychorda complanata, Gymnema sp., Chordifex fastigiatus
	Т	10	12	5	Angophora costata
MADIDO2 A 20	M2	0.5	2	20	Dodonaea triquetra, Acacia longifolia, Hibbertia nitida ▲ 2RC-
MRIP02A20	M1	5	7	10	Allocasuarina littoralis, Banksia ericifolia subsp. ericifolia
	L1	0	1	30	Sticherus flabellatus, Gleichenia microphylla, Schoenus melanostachys
	Т	6	14	1	Angophora costata, Eucalyptus oblonga
MADIDO2 A 20	M2	0.2	1.8	10	Acacia obtusifolia, Lomatia myricoides, Dodonaea triquetra
MRIP03A20	M1	2	6	50	Acacia obtusifolia, Allocasuarina littoralis, Leptospermum morrisonii
	L1	0	1.5	25	Gleichenia microphylla, Bauera microphylla, Hibbertia nitida ▲ 2RC-
	Т	10	12	20	Allocasuarina littoralis, Callitris rhomboidea, Angophora costata
MRIP04A20	M1	0.5	5	4	Leptospermum morrisonii, Callistemon citrinus, Stenocarpus salignus
	L1	0	0.8	5	Entolasia stricta, Leptocarpus tenax, Lomandra fluviatilis ▲ 3RCa
	Т	15	15	5	Eucalyptus piperita
MADIDOE A 20	M2	0.8	3	25	Dodonaea triquetra, Hibbertia nitida ▲ 2RC-, Lambertia formosa
MRIP05A20	M1	4	8	10	Allocasuarina littoralis, Hakea sericea
	L1	0	1	25	Schoenus melanostachys, Bauera rubioides, Sporadanthus gracilis
	T	15	15	5	Eucalyptus piperita
MRIP06A20	M1	1.2	8	20	Allocasuarina littoralis, Hakea sericea, Lomatia myricoides
	L1	0	0.6	20	Schoenus melanostachys, Bauera rubioides, Sporadanthus gracilis
	Т	15	20	10	Eucalyptus piperita
MRIP07A20	M1	0.5	4	40	Allocasuarina littoralis, Lomatia myricoides, Stenocarpus salignus, Hakea salicifolia
	L1	0	1	60	Sticherus flabellatus, Baumea juncea, Bauera rubioides
MADIDOS A 20	M1	0.5	2.5	30	Tristania neriifolia, Lomatia myricoides, Persoonia pinifolia
MRIP08A20	L1	0	0.7	40	Lomandra fluviatilis ▲ 3RCa

Legend:

T: Upper storey
M1: Mid storey 1
M2: Mid storey 2
L1: Lower stratum 1

RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- R: Rare in Australia but does not have an identifiable threat
- a: 1000 plants or more are known to occur within a conservation reserve(s)
- -: reserved population size is not accurately known

NOTE: Height values provide a guide to the vegetation layers, or strata, recorded per plot. Some overlap of values will occur. Percent foliage cover includes all living vegetation per strata. Woody debris, litter and ground layer dieback, soil and rock are not included in these values.

G2: Estimated cover/abundance data – Riparian sites

Vegetation cover/abundance

Family	Species	MRIP01A20	MRIP02A20	MRIP03A20	MRIP04A20	MRIP05A20	MRIP06A20	MRIP07A20	MRIP08A20
		ARIF							
	Platysace linearifolia	1							
Apiaceae	Xanthosia pilosa					2	1		
	Xanthosia tridentata	3					1		
Asteraceae	Hypochaeris radicata*		1						
	Allocasuarina distyla	1						1	2
Casuarinaceae	Allocasuarina littoralis	5	4	4	4	4	4	4	4
	Bauera rubioides	2	1	4		4	4	4	2
Cunoniaceae	Callicoma serratifolia		3					4	
	Ceratopetalum apetalum		2			1		1	
Cupressaceae	Callitris rhomboidea				4				
	Ваитеа јипсеа							5	1
	Baumea sp.		1						
	Caustis pentandra			1					
	Chorizandra cymbaria				1		1		
	Cyperus sp.		1						
Cyperaceae	Gymnoschoenus sphaerocephalus	4							
	Isolepis sp.		1						
	Lepidosperma laterale	1	1			2			
	Schoenus brevifolius				1				
	Schoenus melanostachys	2	4	3	2	4	4	3	
Dennstaedtiaceae	Pteridium esculentum					1	2		
	Hibbertia aspera								1
Dilleniaceae	Hibbertia nitida ▲ 2RC-	2	4	3	1	4	1	3	2
Doryanthaceae	Doryanthes excelsa		4			1	1		
-	Drosera binata	2							
Droseraceae	Drosera spatulata		1						
	Epacris microphylla	2							
	Epacris obtusifolia	1	1				2	2	
Frience	Epacris pulchella						1		
Ericaceae	Leucopogon amplexicaulis		1			1			
	Monotoca scoparia					1			
	Styphelia tubiflora						1		
F	Micrantheum ericoides					1			
Euphorbiaceae	Pseudanthus pimeleoides	3						3	3
	Aotus ericoides			1					
Fabaceae (Faboideae)	Dillwynia floribunda	2							
	Pultenaea stipularis						1		
	Acacia longifolia	4							
	Acacia longifolia subsp. longifolia		4			1		2	
Fabaceae (Mimosoideae)	Acacia obtusifolia	4		5	4		1		1
	Acacia sp.	1			2			1	
	Acacia terminalis						1		1
Gloichoniasasa	Gleichenia microphylla	3	4	4				1	
Gleicheniaceae	Sticherus flabellatus		5					5	
Goodeniaceae	Dampiera stricta					1			
Haloragaceae	Gonocarpus teucrioides		1		1	1	3	1	2
Juncaginaceae	Triglochin procera		2						
Lamiaceae	Prostanthera linearis	1	3	2	2	3	3		

Vegetation cover/abundance

		A20	A20	A20	A20	A20	A20	A20	A20
Family	Species	MRIP01A20	MRIP02A20	MRIP03A20	MRIP04A20	MRIP05A20	MRIP06A20	MRIP07A20	MRIP08A20
Lauraceae	Cassytha glabella	2	3	≥ 1	2	≥ 1	2	≥	3
Lindsaeaceae	Lindsaea linearis	1							
Loganiaceae	Logania albiflora		1		1			2	3
2080	Lomandra fluviatilis ▲ 3RCa	1	_		3			1	5
	Lomandra gracilis	1				2			
Lomandraceae	Lomandra longifolia	1			1	3		2	1
20	Lomandra obliqua					1			
	Lomandra sp.			1		_			
	Angophora costata		1	1	1		1		1
	Baeckea linifolia	3	_			1	3	2	
	Callistemon citrinus			1	4	_		1	
	Eucalyptus agglomerata			2					
	Eucalyptus piperita			2		4	4	4	
	Eucalyptus sieberi	4				· ·	· ·		
	Kunzea ambigua							1	1
Myrtaceae	Leptospermum morrisonii	3		4	4		1	2	
	Leptospermum polygalifolium	1	2	_	_	1	1		4
	Leptospermum squarrosum				1	2	1		
	Leptospermum trinervium				_		1		
	Melaleuca squarrosa						1	2	
	Tristania neriifolia	4	3		1		1	4	4
	Tristaniopsis laurina	-	3		1		1	-	2
Phormiaceae	Dianella caerulea			1		2		2	
Pittosporaceae	Billardiera scandens		1	1					
rittosporaceae	Anisopogon avenaceus					1			
	Entolasia stricta	2	1	1	3	3	3	2	1
Poaceae	Microlaena stipoides		1		1	3	3		
	Tetrarrhena turfosa				1			1	
	Banksia ericifolia subsp. ericifolia	4	2	1	4	2	4	3	1
	Banksia marginata	4			4		4	1	
	Banksia oblongifolia						1		
	Banksia serrata			1		2	1		
	Banksia spinulosa					1			
	Hakea dactyloides	1	1	1		4	1		
	Hakea salicifolia	1	1			4	1	4	4
Proteaceae	Hakea sericea					1	4	4	-4
		1				-			2
	Hakea teretifolia	1				1	1		
	Lambertia formosa	4	2	4	2	4	4	4	4
	Lomatia myricoides	4	2	4	2	1	4	4	4
	Persoonia pinifolia	2	3	4	2	2	1	4	4
	Petrophile pulchella		1			2			
	Stenocarpus salignus	-			4		4	4	3
	Chordifex fastigiatus	3				_	1		
Deaties.	Empodisma minus	-	2			1	1		
Restionaceae	Eurychorda complanata	4	1	1	_				
	Leptocarpus tenax	1			2				
	Sporadanthus gracilis	1	_			3	4	2	
Rhamnaceae	Pomaderris elliptica		3	2				1	

Vegetation cover/abundance

Family	Species	MRIP01A20	MRIP02A20	MRIP03A20	MRIP04A20	MRIP05A20	MRIP06A20	MRIP07A20	MRIP08A20
Rubiaceae	Opercularia aspera				1	1		1	1
	Leionema dentatum				1			2	
Rutaceae	Leionema diosmeum	2							
	Phebalium squamulosum	1							
Santalaceae	Leptomeria acida					1			
Sapindaceae	Dodonaea triquetra		4	4	3	3	3	4	3
Scrophulariaceae	Gratiola pumilo		1						
Smilacaceae	Smilax glyciphylla	1	2					1	1
Sterculiaceae	Lasiopetalum ferrugineum		2					1	2
Thymelaeaceae	Pimelea linifolia								1
Xanthorrhoeaceae	Xanthorrhoea media	2				1			
V. mi da a a a	Xyris gracilis						1		
Xyridaceae	Xyris operculata	1							
TOTAL		43	41	27	28	44	39	42	31

Cover Abundance Scale (Modified Braun Blanquet):

- 1 = cover less than 5% of site and rare
- 2 = cover less than 5% of site and uncommon
- 3 = cover of less than 5% and common
- 4 = cover of 5-20% of site
- 5 = cover of 21-50% of site
- 6 = cover of 51-75% of site
- 7 = cover of greater than 75%
- * Non-native species

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- R: Rare in Australia but does not have an identifiable threat
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- a: 1000 plants or more are known to occur within a conservation reserve(s)
- -: reserved population size is not accurately known

G3: Vegetation condition – Riparian sites

Vegetation condition

		LA20	:A20	3A20	1A20	;A20	3A20	, A20	3A20
Family	Species	MRIP01A20	MRIP02A20	MRIP03A20	MRIP04A20	MRIP05A20	MRIP06A20	MRIP07A20	MRIP08A20
	Platysace linearifolia	5							
Apiaceae	Xanthosia pilosa					5	5		
	Xanthosia tridentata	5					5		
Asteraceae	Hypochaeris radicata*		5						
Cocuarinaceae	Allocasuarina distyla	3						5	5
Casuarinaceae	Allocasuarina littoralis	5	1	4	5	5	5	5	5
	Bauera rubioides	3	5	4		5	4	5	1
Cunoniaceae	Callicoma serratifolia		5					5	
	Ceratopetalum apetalum		5			5		5	
Cupressaceae	Callitris rhomboidea				5				
	Ваитеа јипсеа							5	5
	Baumea sp.		5						
	Caustis pentandra			5					
	Chorizandra cymbaria				5		5		
	Cyperus sp.		5						
Cyperaceae	Gymnoschoenus sphaerocephalus	5							
	Isolepis sp.		5						
	Lepidosperma laterale	5	5			5			
	Schoenus brevifolius				5				
	Schoenus melanostachys	5	5	5	5	4	3	5	
Dennstaedtiaceae	Pteridium esculentum					5	5		
Demistacutiaceae	Hibbertia aspera						, ,		5
Dilleniaceae	Hibbertia nitida ≜ 2RC-	3	5	5	5	5	5	5	5
Doryanthaceae	Doryanthes excelsa	3	5	3	3	5	5	J	<u> </u>
Doiyantilaceae	Drosera binata	5	, J				J		
Droseraceae			5						
	Drosera spatulata		5						
	Epacris microphylla	5							
	Epacris obtusifolia	5	5				5	5	
Ericaceae	Epacris pulchella						5		
	Leucopogon amplexicaulis		5			5			
	Monotoca scoparia					5			
	Styphelia tubiflora						5		
Euphorbiaceae	Micrantheum ericoides					5			
'	Pseudanthus pimeleoides	5						5	5
	Aotus ericoides			5					
Fabaceae (Faboideae)	Dillwynia floribunda	5							
	Pultenaea stipularis						5		
	Acacia longifolia	5							
	Acacia longifolia subsp. longifolia		5			3		5	
Fabaceae (Mimosoideae)	Acacia obtusifolia	4		4	5		5		5
	Acacia sp.	5			5			5	
	Acacia terminalis						5		5
Claighagiagas	Gleichenia microphylla	4	5	4				5	
Gleicheniaceae	Sticherus flabellatus		5					4	
Goodeniaceae	Dampiera stricta					5			
Haloragaceae	Gonocarpus teucrioides		5		5	5	5	5	5
Juncaginaceae	Triglochin procera		5						

Vegetation condition

		0,	O,	Q	O,	O,	O,	0,	0,
Family	Species	01A2	02 A2	03 A2	04 A2	05 A2	06A2	07 A2	08A2
Tailiny	Species	MRIP01A20	MRIP02A20	MRIP03A20	MRIP04A20	MRIP05A20	MRIP06A20	MRIP07A20	MRIP08A20
Lamiaceae	Prostanthera linearis	5	5	5	5	5	5	_	
Lauraceae	Cassytha glabella		5	5		5		2	2
Lindsaeaceae	Lindsaea linearis	5							
Loganiaceae	Logania albiflora		5		5			5	5
	Lomandra fluviatilis ▲ 3RCa	5			5			5	5
	Lomandra gracilis	5				5			
Lomandraceae	Lomandra longifolia	5			5	3		5	5
	Lomandra obliqua					5			
	Lomandra sp.			5					
	Angophora costata		5	5	5		5		5
	Baeckea linifolia	5				5	5	5	
	Callistemon citrinus			5	4			5	
	Eucalyptus agglomerata			5					
	Eucalyptus piperita			5		5	5	5	
	Eucalyptus sieberi	5							
	Kunzea ambigua							5	5
Myrtaceae	Leptospermum morrisonii	5		5	4		5	5	
	Leptospermum polygalifolium		5			5	5	_	5
	Leptospermum squarrosum				5	5	5		
	Leptospermum trinervium						5		
	Melaleuca squarrosa						3	5	
	Tristania neriifolia	5	5		5		5	5	5
	Tristaniopsis laurina								5
Phormiaceae	Dianella caerulea			5		5		5	
Pittosporaceae	Billardiera scandens		5	5					
rittosporaceae	Anisopogon avenaceus					5			
	Entolasia stricta	5	5	5	5	5	5	5	5
Poaceae	Microlaena stipoides		5	, ,	5		, ,		
	Tetrarrhena turfosa							5	
	Banksia ericifolia subsp. ericifolia	5	3	4	5	5	4	5	5
	Banksia marginata		-				_	5	
	Banksia oblongifolia						5		
	Banksia serrata			5		5	, ,		
	Banksia spinulosa			,		5			
	Hakea dactyloides	5	5	5		5	5		
	Hakea salicifolia			J		5	J	5	5
Proteaceae	Hakea sericea					1	5	3	3
		5					5		1
	Hakea teretifolia Lambertia formosa	<u> </u>				5)		4
	Lomatia myricoides	5	5	5	Е	5	Е	1	Е
	-	5	5	5	5	5	5	5	5 5
	Persoonia pinifolia	э	-) 5)) 5	э -	_ <u></u>
	Petrophile pulchella		3		-	5		Г	F
	Stenocarpus salignus				5			5	5
	Chordifex fastigiatus	5	_				5		
Restionaceae	Empodisma minus		5	_		4	5		
	Eurychorda complanata	5	5	3	-				
	Leptocarpus tenax	5			5				

Vegetation condition

Family	Species	MRIP01A20	MRIP02A20	MRIP03A20	MRIP04A20	MRIP05A20	MRIP06A20	MRIP07A20	MRIP08A20
	Sporadanthus gracilis	5				3	3	5	
Rhamnaceae	Pomaderris elliptica		3	5				5	
Rubiaceae	Opercularia aspera				5	5		5	5
	Leionema dentatum				5			5	
Rutaceae	Leionema diosmeum	5							
	Phebalium squamulosum	5							
Santalaceae	Leptomeria acida					5			
Sapindaceae	Dodonaea triquetra		5	5	5	5	5	5	4
Scrophulariaceae	Gratiola pumilo		5						
Smilacaceae	Smilax glyciphylla	5	5					5	5
Sterculiaceae	Lasiopetalum ferrugineum		5					5	5
Thymelaeaceae	Pimelea linifolia								5
Xanthorrhoeaceae	Xanthorrhoea media	5				5			
V. wide ee e	Xyris gracilis						5		
Xyridaceae	Xyris operculata	5							
TOTAL		43	41	27	28	44	39	42	31

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy
- * Non-native species

▲ RoTAP species:

- 2: Geographic range in Australia less than 100 km
- 3: Geographic range in Australia more than 100 km
- R: Rare in Australia but does not have an identifiable threat
- C: Reserved in that at least one population is found in a national park or other proclaimed conservation reserve
- a: 1000 plants or more are known to occur within a conservation reserve(s)
- -: reserved population size is not accurately known

127

G4: Indicator species data – Riparian sites

Condition and Reproductive Rating for Riparian Indicator Species

			Coord	linates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
MRIP01	Lomatia myricoides	g1	309837.05	6214400.19	3	1
MRIP01	Lomatia myricoides	g2	309837.62	6214399.31	4	1
MRIP01	Lomatia myricoides	g3	309833.83	6214408.03	5	1
MRIP01	Lomatia myricoides	g4	309834.08	6214414.09	5	1
MRIP01	Lomatia myricoides	g5	309833.24	6214421.61	4	1
MRIP01	Lomatia myricoides	g6	309834.45	6214418.39	3	1
MRIP01	Lomatia myricoides	g7	309833.21	6214422.30	4	1
MRIP01	Lomatia myricoides	g8/g201	309835.42	6214423.21	4	1
MRIP01	Lomatia myricoides	g9	309835.66	6214424.22	4	1
MRIP01	Lomatia myricoides	g10	309831.98	6214425.37	4	1
MRIP01	Lomatia myricoides	g11	309834.56	6214437.71	4	1
MRIP01	Lomatia myricoides	g12	309836.93	6214437.47	4	1
MRIP01	Lomatia myricoides	g13	309832.58	6214449.33	5	1
MRIP01	Lomatia myricoides	g14	309848.87	6214503.10	5	1
MRIP01	Lomatia myricoides	g15	309847.80	6214507.66	2	1
MRIP01	Lomatia myricoides	g16	309859.87	6214465.50	1	1
MRIP01	Lomatia myricoides	g17	309865.17	6214385.45	4	3
MRIP01	Lomatia myricoides	g18	309856.19	6214409.62	5	1
MRIP01	Lomatia myricoides	g19	309861.03	6214396.51	5	1
MRIP01	Lomatia myricoides	g20	309854.59	6214392.10	4	1
IVIIIII OI	Lomatia myricolaes	620	303034.33	0214332.10		
MRIP01	Prostanthera linearis	h1	309835.83	6214401.73	1	1
MRIP01	Prostanthera linearis	h2	309833.89	6214404.88	1	1
MRIP01	Prostanthera linearis	h3	309833.73	6214406.01	1	1
MRIP01	Prostanthera linearis	h4	309830.52	6214410.46	1	1
MRIP01	Prostanthera linearis	h5	309833.02	6214415.31	4	1
MRIP01	Prostanthera linearis	h6	309834.98	6214437.33	1	1
MRIP01	Prostanthera linearis	h7	309835.48	6214439.12	1	1
MRIP01	Prostanthera linearis	h8		6214439.12	1	1
MRIP01	Prostanthera linearis	h9	309839.38 309852.30	6214478.91	3	1
MRIP01	Prostanthera linearis	h10	309855.42	6214426.52	1	1
MRIP01	Prostanthera linearis	h11	309871.29	6214376.62		
MRIP01	Prostanthera linearis	h12	-	6214409.67	1	1
	Prostanthera linearis		309857.10 309855.70			
MRIP01	Prostanthera linearis	h13		6214413.75	1	1
MRIP01		h14	309856.74	6214411.92	1	1
MRIP01	Prostanthera linearis	h15	309857.35	6214405.90	1	1
MRIP01	Prostanthera linearis	h16	309856.26	6214408.28	1	1
MRIP01	Prostanthera linearis	h17	309857.99	6214398.62	1	1
MRIP01	Prostanthera linearis	h18	309859.32	6214400.36	1	1
MRIP01	Prostanthera linearis	h19	309858.06	6214402.33	1	1
MRIP01	Prostanthera linearis	h20	309856.96	6214405.66	4	1
NADIDO4	Cabaanus		200026 10	6244402.00	F	4
MRIP01	Schoenus melanostachys	i1 :2	309836.48	6214402.00	5	1
MRIP01	Schoenus melanostachys	i2	309833.11	6214412.77	1	1
MRIP01	Schoenus melanostachys	i3/ i202	309835.86	6214421.74	4	1
MRIP01	Schoenus melanostachys	i4	309832.37	6214421.94	1	1
MRIP01	Schoenus melanostachys	i5	309835.65	6214426.47	4	1
MRIP01	Schoenus melanostachys	i6	309835.17	6214428.48	3	1
MRIP01	Schoenus melanostachys	i7	309832.80	6214448.35	1	1

Condition and Reproductive Rating for Riparian Indicator Species

			Coord	inates		Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
MRIP01	Schoenus melanostachys	i8	309835.93	6214466.55	3	1
MRIP01	Schoenus melanostachys	i9	309839.58	6214478.86	2	1
MRIP01	Schoenus melanostachys	i10	309836.80	6214485.48	4	1
MRIP01	Schoenus melanostachys	i11	309837.25	6214479.07	1	1
MRIP01	Schoenus melanostachys	i12	309843.97	6214490.82	3	1
MRIP01	Schoenus melanostachys	i13	309845.61	6214505.91	4	1
MRIP01	Schoenus melanostachys	i14	309862.07	6214483.87	1	1
MRIP01	Schoenus melanostachys	i15	309860.10	6214466.75	1	1
MRIP01	•	i16	309859.70	6214464.60	2	1
MRIP01	Schoenus melanostachys	i17	309859.33	6214463.14	1	1
	Schoenus melanostachys		-			
MRIP01	Schoenus melanostachys	i18/i201	309859.74	6214464.24	1	1
MRIP01	Schoenus melanostachys	i19	309851.68	6214448.23	4	1
MRIP01	Schoenus melanostachys	i20	309861.46	6214401.95	1	1
MRIP02	Lamatia muricolida	~21	210017.22	6214640.01	2	4
	Lomatia myricoides	g21	310017.33	6214640.81	3	1
MRIP02	Lomatia myricoides	g22	310021.92	6214643.97	4	1
MRIP02	Lomatia myricoides	g23	310029.02	6214646.43	1	1
MRIP02	Lomatia myricoides	g24	310038.73	6214649.66	1	1
MRIP02	Lomatia myricoides	g25	310017.62	6214643.23	1	1
MRIP02	Lomatia myricoides	g26	310015.69	6214645.06	5	1
MRIP02	Lomatia myricoides	g27	310047.56	6214654.63	5	1
MRIP02	Lomatia myricoides	g28	310048.71	6214654.16	5	1
MRIP02	Lomatia myricoides	g29	310049.46	6214654.27	1	1
MRIP02	Lomatia myricoides	g30	310052.11	6214656.77	1	1
MRIP02	Lomatia myricoides	g31	310053.74	6214655.79	5	1
MRIP02	Lomatia myricoides	g32	310058.19	6214660.87	5	1
MRIP02	Lomatia myricoides	g33	310063.83	6214660.46	4	1
MRIP02	Lomatia myricoides	g34	310000.94	6214625.13	1	1
MRIP02	Lomatia myricoides	g35	310001.97	6214620.28	4	1
MRIP02	Lomatia myricoides	g36	310003.86	6214626.73	1	1
MRIP02	Lomatia myricoides	g37	310008.64	6214625.29	1	1
MRIP02	Lomatia myricoides	g38	310014.13	6214629.20	1	1
MRIP02	Lomatia myricoides	g39	310020.71	6214622.93	1	1
MRIP02	Lomatia myricoides	g40	310025.36	6214629.70	4	1
MRIP02	Prostanthera linearis	h21	310018.57	6214642.40	1	1
MRIP02	Prostanthera linearis	h22	310023.46	6214645.59	1	1
MRIP02	Prostanthera linearis	h23	310028.14	6214644.77	1	1
MRIP02	Prostanthera linearis	h24	310028.66	6214643.88	1	1
MRIP02	Prostanthera linearis	h25	310032.27	6214644.86	1	1
MRIP02	Prostanthera linearis	h26	310033.36	6214647.67	1	1
MRIP02	Prostanthera linearis	h27	310035.35	6214649.21	1	1
MRIP02	Prostanthera linearis	h28	310036.09	6214649.23	1	1
MRIP02	Prostanthera linearis	h29	310037.13	6214650.01	3	1
MRIP02	Prostanthera linearis	h30	310057.12	6214658.39	1	1
MRIP02	Prostanthera linearis	h31	310038.65	6214650.02	1	1
MRIP02	Prostanthera linearis	h32	310016.54	6214643.40	4	1
MRIP02	Prostanthera linearis	h33	310017.74	6214645.23	1	1
MRIP02	Prostanthera linearis	h34	310041.32	6214652.06	1	1

Condition and Reproductive Rating for Riparian Indicator Species

Site	Species	Tag	Coord	linates	Condition	Reproductive
Jite	эрголсэ	rug	Easting	Northing	Condition	Status
MRIP02	Prostanthera linearis	h35	310042.35	6214652.24	1	1
MRIP02	Prostanthera linearis	h36	310046.77	6214654.71	5	1
MRIP02	Prostanthera linearis	h37	310051.44	6214656.51	1	1
MRIP02	Prostanthera linearis	h38	310039.83	6214650.09	2	1
MRIP02	Prostanthera linearis	h39	310058.81	6214659.13	1	1
MRIP02	Prostanthera linearis	h40	310057.77	6214659.11	1	1
MADIDOS	Caba anno malamantanhun	:21	210022.00	6214642.06	1	1
MRIP02	Schoenus melanostachys Schoenus melanostachys	i21	310023.60	6214643.06 6214645.35	1	1 1
MRIP02		i23	310024.05 310027.04	6214643.88		1
	Schoenus melanostachys		-		1	
MRIP02	Schoenus melanostachys	i24	310030.42	6214645.26	1	1
MRIP02	Schoenus melanostachys	i25	310034.82	6214648.10	1	1
MRIP02	Schoenus melanostachys	i26	310018.01	6214639.72	1	1
MRIP02	Schoenus melanostachys	i27	310016.64	6214644.70	1	1
MRIP02	Schoenus melanostachys	i28	310041.89	6214652.00	3	1
MRIP02	Schoenus melanostachys	i29	310043.11	6214652.56	1	1
MRIP02	Schoenus melanostachys	i30	310052.20	6214654.31	1	1
MRIP02	Schoenus melanostachys	i31	310054.31	6214654.94	1	1
MRIP02	Schoenus melanostachys	i32	310005.79	6214624.20	1	1
MRIP02	Schoenus melanostachys	i33	310005.67	6214623.93	1	1
MRIP02	Schoenus melanostachys	i34	310007.89	6214626.86	1	1
MRIP02	Schoenus melanostachys	i35	310010.04	6214626.39	1	1
MRIP02	Schoenus melanostachys	i36	310014.83	6214626.73	1	1
MRIP02	Schoenus melanostachys	i37	310014.39	6214628.16	1	1
MRIP02	Schoenus melanostachys	i38	310021.72	6214629.48	1	1
MRIP02	Schoenus melanostachys	i39	310024.65	6214630.31	1	1
MRIP02	Schoenus melanostachys	i40	310034.17	6214633.12	1	1
MRIP03	Lomatia myricoides	g101	310514.87	6215342.81	5	1
MRIP03	Lomatia myricoides	g102	310501.18	6215333.12	5	1
MRIP03	Lomatia myricoides	g103	310497.38	6215330.40	5	1
MRIP03	Lomatia myricoides	g104	310483.20	6215320.88	5	1
MRIP03	Lomatia myricoides	g105	310493.94	6215320.73	3	1
MRIP03	Lomatia myricoides	g106	310453.34	6215293.74	5	1
MRIP03	Lomatia myricoides	g107	310452.40	6215292.80	4	1
MRIP03	Lomatia myricoides	g108	310448.73	6215292.57	4	1
MRIP03	Lomatia myricoides	g109	310448.10	6215290.27	4	1
MRIP03	Lomatia myricoides	g110	310450.75	6215289.20	5	1
MRIP03	Lomatia myricoides	g111	310511.17	6215338.40	5	1
MRIP03	Lomatia myricoides	g112	310508.09	6215337.03	5	1
MRIP03	Lomatia myricoides	g113	310490.84	6215324.19	5	1
MRIP03	Lomatia myricoides	g113 g114	310492.02	6215328.78	4	1
MRIP03	Lomatia myricoides	g114 g115	310432.02	6215316.09	1	1
MRIP03	Lomatia myricoides	g115	310458.56	6215302.23	4	1
MRIP03	Lomatia myricoides	g110 g117	310438.30	6215302.23	5	1
MRIP03	Lomatia myricoides	g117 g118	310462.08	6215284.67	4	1
MRIP03	Lomatia myricoides	g118 g119	310445.74	6215284.67	5	1
MRIP03	Lomatia myricoides	g119 g120	310445.74	6215305.10	3	1
IVIIVIFUS	Lomatia myricolaes	g120	310413.37	0213303.10	٥	1

Condition and Reproductive Rating for Riparian Indicator Species

			Coordinates			Daniel de la contraction
Site	Species	Tag	Easting	Northing	Condition	Reproductive Status
MRIP03	Prostanthera linearis	h101	310504.75	6215334.00	1	1
MRIP03	Prostanthera linearis	h101	310304.73	6215328.43	3	2
MRIP03	Prostanthera linearis	h103	310496.53	6215327.78	1	1
MRIP03	Prostanthera linearis	h104	310496.37	6215327.78	1	1
MRIP03	Prostanthera linearis	h105	310494.72	6215325.03	1	1
MRIP03	Prostanthera linearis	h106	310492.91	6215321.99	1	1
MRIP03	Prostanthera linearis	h107/h203	310490.88	6215324.01	1	1
MRIP03	Prostanthera linearis	h108	310474.30	6215322.91	1	1
MRIP03	Prostanthera linearis	h109	310474.50	6215297.08	1	1
MRIP03	Prostanthera linearis	h110	310457.72	6215296.59	5	2
MRIP03	Prostanthera linearis	h111	310457.38	6215296.27	5	4
MRIP03	Prostanthera linearis	h112	310457.38	6215290.79	1	1
MRIP03	Prostanthera linearis	h113	310432.49	6215303.87	1	1
MRIP03	Prostanthera linearis	h114	310418.00	6215313.07	1	1
MRIP03	Prostanthera linearis	h115	310423.53	6215311.76	5	2
MRIP03	Prostanthera linearis	h116	310433.04	6215311.70	1	1
MRIP03	Prostanthera linearis	h117	310437.43	6215313.54	1	1
MRIP03	Prostanthera linearis	h118	310436.89	6215316.86	1	1
MRIP03	Prostanthera linearis	h119	310443.04	6215318.67	4	2
MRIP03	Prostanthera linearis	h120	310448.29	6215317.09	1	1
IVINIPUS	Prostuntnera inieuris	11120	310446.94	0213317.09	<u> </u>	1
MRIP03	Schoenus melanostachys	i121	310520.35	6215342.50	2	1
MRIP03	Schoenus melanostachys	+	310520.33	6215337.58	4	1
MRIP03	,	i122/i204	310509.34	6215335.06	1	1
MRIP03	Schoenus melanostachys Schoenus melanostachys	i123	310501.99	6215333.00	1	1
MRIP03	,	i124	310301.79	6215331.97	1	1
MRIP03	Schoenus melanostachys Schoenus melanostachys	i126/i205	310495.51	6215331.40	1	1
	,	+			1	1
MRIP03	Schoenus melanostachys	i127	310485.46	6215319.97 6215316.91	1	
MRIP03 MRIP03	Schoenus melanostachys	i128	310479.33 310475.94	6215316.91	1	1
	Schoenus melanostachys				3	
MRIP03	Schoenus melanostachys	i130	310460.21	6215298.50		1
MRIP03 MRIP03	Schoenus melanostachys	i131	310459.11	6215297.78	3	1
	Schoenus melanostachys	i132/i206	310455.42	6215294.93		
MRIP03	Schoenus melanostachys	i133/i207	310445.00	6215282.00	3	1
MRIP03	Schoenus melanostachys	i134	310440.62	6215285.05	3	1
MRIP03	Schoenus melanostachys	i135	310409.10	6215302.50	3	1
MRIP03	Schoenus melanostachys	i136	310424.44	6215312.50	4	1
MRIP03	Schoenus melanostachys	i137	310427.48	6215311.81	1	1
MRIP03	Schoenus melanostachys	i138	310441.21	6215288.02	3	1
MRIP03	Schoenus melanostachys	i139	310447.44	6215280.99	3	1
MRIP03	Schoenus melanostachys	i140	310497.55	6215323.12	1	1
NADIDO 4	Lamantia recontrated	-424	244000 47	C215404 42	4	1
MRIP04	Lomatia myricoides	g121	311009.17	6215481.13	1	1
MRIP04	Lomatia myricoides	g122	311006.53	6215475.78	5	1
MRIP04	Lomatia myricoides	g123	311062.49	6215496.47	5	1
MRIP04	Lomatia myricoides	g124	311060.59	6215493.29	5	1
MRIP04	Lomatia myricoides	g125	311068.13	6215499.66	5	1
MRIP04	Lomatia myricoides	g126	311070.42	6215498.34	4	1
MRIP04	Lomatia myricoides	g127	311071.93	6215504.89	2	1

Condition and Reproductive Rating for Riparian Indicator Species

Cito	Species	Too	Coord	linates	Condition	Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
MRIP04	Lomatia myricoides	g128	311075.17	6215506.75	5	1
MRIP04	Lomatia myricoides	g129	311073.20	6215498.96	4	1
MRIP04	Lomatia myricoides	g130	311073.72	6215498.61	5	1
MRIP04	Lomatia myricoides	g131	311076.14	6215500.68	4	1
MRIP04	Lomatia myricoides	g132	311075.85	6215501.94	5	1
MRIP04	Lomatia myricoides	g133	311077.16	6215502.92	5	1
MRIP04	Lomatia myricoides	g134	311073.60	6215503.85	5	1
MRIP04	Lomatia myricoides	g135	311084.99	6215504.97	4	1
MRIP04	Lomatia myricoides	g136	311089.89	6215505.30	3	1
MRIP04	Lomatia myricoides	g137	311064.71	6215516.30	5	1
MRIP04	Lomatia myricoides	g138	311074.25	6215520.67	5	1
MRIP04	Lomatia myricoides	g139	311068.53	6215519.91	4	1
MRIP04	Lomatia myricoides	g140	311082.29	6215517.28	4	1
	,	1 0	ı			
MRIP04	Prostanthera linearis	h121	311020.93	6215482.89	1	1
MRIP04	Prostanthera linearis	h122	311030.16	6215476.69	1	1
MRIP04	Prostanthera linearis	h123	311041.99	6215486.94	1	1
MRIP04	Prostanthera linearis	h124	311049.86	6215488.02	1	1
MRIP04	Prostanthera linearis	h125	311049.72	6215483.21	1	1
MRIP04	Prostanthera linearis	h126	311053.16	6215487.44	1	1
MRIP04	Prostanthera linearis	h127	311053.10	6215488.99	1	1
MRIP04	Prostanthera linearis	h128	311053.91	6215487.27	1	1
MRIP04	Prostanthera linearis	h129	311062.90	6215489.38	1	1
MRIP04	Prostanthera linearis	h130	311062.30	6215491.91	5	1
MRIP04	Prostanthera linearis	h131	311063.06	6215492.35	1	1
MRIP04	Prostanthera linearis	h132	311063.71	6215495.15	1	1
MRIP04	Prostanthera linearis	h133	311060.45	6215497.58	1	1
MRIP04	Prostanthera linearis	h134	311067.72	6215492.01	1	1
MRIP04	Prostanthera linearis	h135	311007.72	6215498.34	1	1
MRIP04	Prostanthera linearis	h136	311077.80	6215499.63	1	1
MRIP04	Prostanthera linearis	h137	311077.83	6215501.37	1	1
MRIP04	Prostanthera linearis	h138/h192	311080.03	6215500.54		
MRIP04	Prostanthera linearis	h139	311060.13	6215520.17	1	1
MRIP04	Prostanthera linearis	h140	311069.72	6215518.28	1	1
IVINIPU4	Prostuntnera illiearis	11140	311000.37	0213316.26	1	1
MRIP04	Schoenus melanostachys	i101	311008.30	6215470.76	4	1
MRIP04	Schoenus melanostachys	i101	311008.30	6215470.76		
MRIP04	<u> </u>				3	1
	Schoenus melanostachys	i103	311042.12	6215488.07	3	1
MRIP04	Schoenus melanostachys	i104	311051.84	6215486.33	3	2
MRIP04	Schoenus melanostachys	i105	311063.11	6215496.46	3	1
MRIP04	Schoenus melanostachys	i106	311068.60	6215500.54	4	1
MRIP04	Schoenus melanostachys	i107	311070.51	6215501.81	4	1
MRIP04	Schoenus melanostachys	i108	311076.05	6215504.98	4	1
MRIP04	Schoenus melanostachys	i109	311074.72	6215508.03	5	1
MRIP04	Schoenus melanostachys	i110	311083.67	6215504.78	4	1
MRIP04	Schoenus melanostachys	i111	311087.18	6215503.52	3	1
MRIP04	Schoenus melanostachys	i112	311074.35	6215521.23	4	1
MRIP04	Schoenus melanostachys	i113	311054.08	6215513.12	4	1
MRIP04	Schoenus melanostachys	i114	311018.85	6215509.38	2	1

Condition and Reproductive Rating for Riparian Indicator Species

611	Species		Coordinates			Reproductive
Site		Tag	Easting	Northing	Condition	Status
MRIP04	Schoenus melanostachys	i115	311063.43	6215518.08	4	1
MRIP04	Schoenus melanostachys	i116	311024.12	6215511.47	4	1
MRIP04	Schoenus melanostachys	i117	311023.34	6215510.88	4	1
MRIP04	Schoenus melanostachys	i118	311019.97	6215511.47	4	1
MRIP04	Schoenus melanostachys	i119	311019.72	6215493.75	4	1
MRIP04	Schoenus melanostachys	i120	311017.06	6215508.65	3	1
	,		ı			
MRIP05	Lomatia myricoides	g61	311462.67	6213713.33	4	1
MRIP05	Lomatia myricoides	g62	311462.19	6213709.16	1	1
MRIP05	Lomatia myricoides	g63	311460.42	6213720.26	1	1
MRIP05	Lomatia myricoides	g64	311460.96	6213722.25	3	1
MRIP05	Lomatia myricoides	g65	311464.70	6213721.90	5	1
MRIP05	Lomatia myricoides	g66	311461.49	6213725.56	1	1
MRIP05	Lomatia myricoides	g67	311495.51	6213780.20	4	1
MRIP05	Lomatia myricoides	g68/ g205	311526.37	6213808.77	1	1
MRIP05	Lomatia myricoides	g69/g204	311526.12	6213809.95	4	1
MRIP05	Lomatia myricoides	g70	311524.26	6213811.72	1	1
MRIP05	Lomatia myricoides	g71	311524.60	6213811.33	1	1
MRIP05	Lomatia myricoides	g72	311524.20	6213818.07	1	1
MRIP05	Lomatia myricoides	g73	311523.63	6213818.38	4	1
MRIP05	Lomatia myricoides	g74	311520.64	6213814.59	5	1
MRIP05	Lomatia myricoides	g75	311519.78	6213812.96	5	1
MRIP05	Lomatia myricoides	g76	311502.57	6213794.07	3	1
MRIP05	Lomatia myricoides	g77	311500.90	6213793.99	1	1
MRIP05	Lomatia myricoides	g78	311494.86	6213785.28	5	1
MRIP05	Lomatia myricoides	g79	311521.25	6213820.94	5	1
MRIP05	Lomatia myricoides	g80	311529.32	6213815.57		_
	20	800	011010101	0220020.07		l
MRIP05	Prostanthera linearis	h61	311462.89	6213722.39	1	1
MRIP05	Prostanthera linearis	h62/h202	311463.82	6213723.92	1	1
MRIP05	Prostanthera linearis	h63	311462.07	6213722.06	1	1
MRIP05	Prostanthera linearis	h64	311464.61	6213726.57	1	1
MRIP05	Prostanthera linearis	h65	311465.24	6213726.49	1	1
MRIP05	Prostanthera linearis	h66	311465.61	6213729.74	1	1
MRIP05	Prostanthera linearis	h67	311466.97	6213731.80	1	1
MRIP05	Prostanthera linearis	h68	311469.31	6213733.21	3	1
MRIP05	Prostanthera linearis	h69	311471.02	6213733.77	5	1
MRIP05	Prostanthera linearis	h70	311473.82	6213744.67	1	1
MRIP05	Prostanthera linearis	h71	311479.54	6213759.90	1	1
MRIP05	Prostanthera linearis	h72	311486.40	6213769.73	3	1
MRIP05	Prostanthera linearis	h73	311485.87	6213771.97	1	1
MRIP05	Prostanthera linearis	h74	311490.80	6213774.20	5	1
MRIP05	Prostanthera linearis	h75	311494.11	6213776.26	1	1
MRIP05	Prostanthera linearis	h76	311503.44	6213776.72	1	1
MRIP05	Prostanthera linearis	h77	311503.00	6213776.72	1	1
MRIP05	Prostanthera linearis	h78	311505.00	6213790.11	5	2
MRIP05	Prostanthera linearis	h79	311510.51	6213805.82	1	1
MRIP05	Prostanthera linearis	h80	311525.62	6213807.69	1	1
WINIFUS	1 TOSCUTCHETO IIITEUTIS	1100	311323.02	0213007.03	1	1

Condition and Reproductive Rating for Riparian Indicator Species

Site	Species	Tag	Coord	linates	Condition	Reproductive
		Tag	Easting	Northing	Condition	Status
MRIP05	Schoenus melanostachys	i61	311465.40	6213721.59	2	1
MRIP05	Schoenus melanostachys	i62	311463.37	6213727.12	4	1
MRIP05	Schoenus melanostachys	i63	311467.68	6213733.43	3	1
MRIP05	Schoenus melanostachys	i64	311474.04	6213737.50	1	1
MRIP05	Schoenus melanostachys	i65	311474.82	6213738.59	2	1
MRIP05	Schoenus melanostachys	i66	311474.08	6213744.63	3	1
MRIP05	Schoenus melanostachys	i67	311473.14	6213742.00	1	1
MRIP05	Schoenus melanostachys	i68	311480.08	6213760.04	2	1
MRIP05	Schoenus melanostachys	i69	311483.58	6213758.74	1	1
MRIP05	Schoenus melanostachys	i70	311481.03	6213761.76	3	1
MRIP05	Schoenus melanostachys	i71	311488.44	6213767.98	3	1
MRIP05	Schoenus melanostachys	i72	311488.29	6213769.51	2	1
MRIP05	Schoenus melanostachys	i73	311498.73	6213781.09	4	1
MRIP05	Schoenus melanostachys	i74	311503.12	6213780.74	4	1
MRIP05	Schoenus melanostachys	i75	311503.41	6213785.15	5	1
MRIP05	Schoenus melanostachys	i76	311505.67	6213784.05	2	1
MRIP05	Schoenus melanostachys	i77	311506.01	6213786.56	3	1
MRIP05	Schoenus melanostachys	i78	311513.03	6213791.94	3	1
MRIP05	Schoenus melanostachys	i79	311523.25	6213817.64	1	1
MRIP05	Schoenus melanostachys	i80	311523.83	6213819.00	4	1
		•				
MRIP06	Lomatia myricoides	g81	311571.09	6213885.94	5	1
MRIP06	Lomatia myricoides	g82/g253	311572.45	6213887.90	5	1
MRIP06	Lomatia myricoides	g83	311572.68	6213888.32	4	1
MRIP06	Lomatia myricoides	g84	311573.77	6213894.66	4	1
MRIP06	Lomatia myricoides	g85	311580.35	6213896.08	4	1
MRIP06	Lomatia myricoides	g86	311576.62	6213893.67	3	1
MRIP06	Lomatia myricoides	g87	311569.17	6213877.91	5	1
MRIP06	Lomatia myricoides	g88	311586.74	6213896.08	4	1
MRIP06	Lomatia myricoides	g89	311585.86	6213899.64	2	1
MRIP06	Lomatia myricoides	g90	311588.16	6213900.74	3	1
MRIP06	Lomatia myricoides	g91	311590.42	6213909.49	2	1
MRIP06	Lomatia myricoides	g92	311592.83	6213923.13	2	1
MRIP06	Lomatia myricoides	g93/g254	311599.11	6213931.93	3	1
MRIP06	Lomatia myricoides	g94	311602.59	6213935.17	1	1
MRIP06	Lomatia myricoides	g95	311603.16	6213934.66	5	1
MRIP06	Lomatia myricoides	g96	311605.35	6213936.02	3	1
MRIP06	Lomatia myricoides	g97	311599.64	6213940.48	5	4
MRIP06	Lomatia myricoides	g98	311609.01	6213949.69	2	1
MRIP06	Lomatia myricoides	g99	311596.36	6213932.90	4	1
MRIP06	Lomatia myricoides	g100	311611.83	6213971.72	3	1
MRIP06	Prostanthera linearis	h81	311569.10	6213886.04	1	1
MRIP06	Prostanthera linearis	h82/h204	311570.42	6213887.42	1	1
MRIP06	Prostanthera linearis	h83	311571.44	6213890.12	1	1
MRIP06	Prostanthera linearis	h84/h205	311572.98	6213893.89	1	1
MRIP06	Prostanthera linearis	h85	311575.57	6213895.86	1	1
MRIP06	Prostanthera linearis	h86	311575.40	6213898.04	1	1
MRIP06	Prostanthera linearis	h87	311581.66	6213898.01	1	1

Condition and Reproductive Rating for Riparian Indicator Species

	Species		Coord	inates		Reproductive
Site		Tag	Easting	Northing	Condition	Status
MRIP06	Prostanthera linearis	h88	311579.48	6213900.32	5	4
MRIP06	Prostanthera linearis	h89	311583.44	6213903.68	4	1
MRIP06	Prostanthera linearis	h90	311578.81	6213875.86	1	1
MRIP06	Prostanthera linearis	h91	311595.65	6213895.17	1	1
MRIP06	Prostanthera linearis	h92	311588.52	6213902.08	2	1
MRIP06	Prostanthera linearis	h93	311591.18	6213906.49	1	1
MRIP06	Prostanthera linearis	h94	311591.38	6213911.33	1	1
MRIP06	Prostanthera linearis	h95/h206	311592.61	6213911.87	1	1
MRIP06	Prostanthera linearis	h96/h207	311592.93	6213912.72	1	1
MRIP06	Prostanthera linearis	h97/h208	311597.52	6213921.43	1	1
MRIP06	Prostanthera linearis	h98	311597.11	6213922.78	1	1
MRIP06	Prostanthera linearis	h99/h209	311601.36	6213934.28	4	2
MRIP06	Prostanthera linearis	h100	311601.82	6213930.93	1	1
IVIIIII OO	1 Tostantificia infearis	11100	311001.02	0213330.33		_
MRIP06	Schoenus melanostachys	i81	311569.91	6213889.70	2	1
MRIP06	Schoenus melanostachys	i82	311568.20	6213889.95	1	1
MRIP06	Schoenus melanostachys	i83	311571.93	6213893.12	1	1
MRIP06	Schoenus melanostachys	i84	311571.95	6213898.45	4	1
MRIP06	Schoenus melanostachys	i85	311581.73	6213902.10	4	1
MRIP06	Schoenus melanostachys	i86	311576.65	6213893.05	3	1
MRIP06	Schoenus melanostachys	i87	311576.03	6213873.78	2	1
	<u> </u>					
MRIP06	Schoenus melanostachys	i88	311587.31	6213900.33	2	1
MRIP06	Schoenus melanostachys	i89/i209	311588.00	6213902.00	3	1
MRIP06	Schoenus melanostachys	i90	311586.31	6213904.15	2	1
MRIP06	Schoenus melanostachys	i91	311590.24	6213906.60	5	1
MRIP06	Schoenus melanostachys	i210	311595.74	6213919.86	3	1
MRIP06	Schoenus melanostachys	i93	311595.97	6213924.95	3	1
MRIP06	Schoenus melanostachys	i94	311599.82	6213925.85	1	1
MRIP06	Schoenus melanostachys	i251	311603.85	6213923.76	1	1
MRIP06	Schoenus melanostachys	i96	311604.89	6213937.52	3	1
MRIP06	Schoenus melanostachys	i97/i252	311600.73	6213938.54	3	1
MRIP06	Schoenus melanostachys	i98	311596.17	6213934.90	3	1
MRIP06	Schoenus melanostachys	i99	311595.05	6213932.76	4	1
MRIP06	Schoenus melanostachys	i100	311600.13	6213940.30	2	1
1 4 D I D O 7		4.54	242457.02	6245252.07	4	
MRIP07	Lomatia myricoides	g161	312157.03	6215252.97	1	1
MRIP07	Lomatia myricoides	g162	312156.25	6215254.65	4	1
MRIP07	Lomatia myricoides	g163	312158.94	6215257.64	5	1
MRIP07	Lomatia myricoides	g164	312153.70	6215262.63	5	1
MRIP07	Lomatia myricoides	g165	312156.94	6215269.27	4	1
MRIP07	Lomatia myricoides	g166	312160.16	6215274.28	3	1
MRIP07	Lomatia myricoides	g167	312160.18	6215277.56	5	1
MRIP07	Lomatia myricoides	g168	312159.92	6215282.65	1	1
MRIP07	Lomatia myricoides	g169	312157.76	6215287.82	1	1
MRIP07	Lomatia myricoides	g170/g208	312159.82	6215297.59	5	1
MRIP07	Lomatia myricoides	g171	312159.97	6215304.48	5	1
MRIP07	Lomatia myricoides	g172	312159.82	6215313.03	3	1
MRIP07	Lomatia myricoides	g173	312150.07	6215266.88	4	2
MRIP07	Lomatia myricoides	g174	312144.99	6215267.78	5	2

Condition and Reproductive Rating for Riparian Indicator Species

Site	Species		Coordinates		0- 1111	Reproductive
		Tag	Easting	Northing	Condition	Status
MRIP07	Lomatia myricoides	g175	312150.36	6215272.46	3	1
MRIP07	Lomatia myricoides	g176	312149.95	6215274.61	3	1
MRIP07	Lomatia myricoides	g177	312146.49	6215276.77	2	1
MRIP07	Lomatia myricoides	g178	312151.46	6215280.33	5	4
MRIP07	Lomatia myricoides	g179	312148.90	6215292.09	3	1
MRIP07	Lomatia myricoides	g180	312152.78	6215311.31	3	2
	, , , , , , , , , , , , , , , , , , , ,	1 0				1
MRIP07	Prostanthera linearis	h161	312164.01	6215325.03	5	1
MRIP07	Prostanthera linearis	h162	312165.16	6215325.37	5	1
MRIP07	Prostanthera linearis	h163	312150.05	6215266.75	1	1
MRIP07	Prostanthera linearis	h164	312148.87	6215285.11	5	1
MRIP07	Prostanthera linearis	h165	312149.54	6215287.48	5	1
MRIP07	Prostanthera linearis	h166	312150.42	6215285.00	2	1
MRIP07	Prostanthera linearis	h167	312150.76	6215301.54	1	1
MRIP07	Prostanthera linearis	h168	312150.70	6215309.40	1	1
MRIP07	Prostanthera linearis	h169	312152.79	6215310.49	3	1
MRIP07	Prostanthera linearis	h170	312152.73	6215308.46	3	2
MRIP07	Prostanthera linearis	h171/h193	312154.01	6215309.50	3	1
MRIP07	Prostanthera linearis	h172	312152.77	6215312.30	4	1
MRIP07	Prostanthera linearis	h173/h194	312150.23	6215312.30	4	1
MRIP07	Prostanthera linearis	h174	312151.02	6215310.88	3	1
	Prostanthera linearis	h175	312153.31	6215310.32	5	1
MRIP07						
MRIP07	Prostanthera linearis	h176	312154.76	6215314.00	3	1
MRIP07	Prostanthera linearis	h177/h195	312153.48	6215312.38	5	1
MRIP07	Prostanthera linearis	h178	312153.16	6215316.44	1	1
MRIP07	Prostanthera linearis	h179	312154.66	6215322.06	1	1
MRIP07	Prostanthera linearis	h180	312148.57	6215331.48	1	1
14DIDO7	Calarana	:4.64	242450.64	6245250 47	2	1
MRIP07	Schoenus melanostachys	i161	312159.61	6215259.47	3	1
MRIP07	Schoenus melanostachys	i162	312156.76	6215268.16	3	4
MRIP07	Schoenus melanostachys	i163	312161.30	6215270.97	3	1
MRIP07	Schoenus melanostachys	i164	312160.63	6215274.19	2	1
MRIP07	Schoenus melanostachys	i165	312157.33	6215278.10	1	1
MRIP07	Schoenus melanostachys	i166	312156.92	6215287.95	2	1
MRIP07	Schoenus melanostachys	i167	312159.36	6215292.64	1	1
MRIP07	Schoenus melanostachys	i168	312164.60	6215309.12	3	1
MRIP07	Schoenus melanostachys	i169	312166.03	6215313.11	4	1
MRIP07	Schoenus melanostachys	i170	312150.30	6215269.97	4	1
MRIP07	Schoenus melanostachys	i171	312150.63	6215266.52	3	1
MRIP07	Schoenus melanostachys	i172	312144.34	6215267.51	4	2
MRIP07	Schoenus melanostachys	i173	312145.63	6215256.76	3	1
MRIP07	Schoenus melanostachys	i174	312151.01	6215276.25	3	2
MRIP07	Schoenus melanostachys	i175	312148.93	6215287.39	2	1
MRIP07	Schoenus melanostachys	i176	312147.84	6215295.25	3	4
MRIP07	Schoenus melanostachys	i177	312146.17	6215298.07	2	1
MRIP07	Schoenus melanostachys	i178	312149.54	6215297.70	2	4
MRIP07	Schoenus melanostachys	i179	312150.48	6215302.79	4	4
MRIP07	Schoenus melanostachys	i180	312153.05	6215309.58	3	1

Condition and Reproductive Rating for Riparian Indicator Species

	Species		Coord	linates		Reproductive Status
Site		Tag	Easting	Northing	Condition	
MRIP08	Lomatia myricoides	g181	312167.00	6215486.96	4	1
MRIP08	Lomatia myricoides	g182/g209	312166.19	6215490.00	4	1
MRIP08	Lomatia myricoides	g183	312163.61	6215490.88	3	1
MRIP08	Lomatia myricoides	g184	312162.85	6215494.49	1	1
MRIP08	Lomatia myricoides	g185	312166.08	6215498.35	4	1
MRIP08	Lomatia myricoides	g186	312157.40	6215492.79	4	1
MRIP08	Lomatia myricoides	g187	312156.48	6215492.78	3	1
MRIP08	Lomatia myricoides	g188/g210	312158.21	6215496.84	3	1
MRIP08	Lomatia myricoides	g189	312156.43	6215496.97	4	1
MRIP08	Lomatia myricoides	g190	312158.36	6215498.37	5	1
MRIP08	Lomatia myricoides	g191	312157.92	6215501.42	3	1
MRIP08	Lomatia myricoides	g192	312159.94	6215502.37	3	1
MRIP08	Lomatia myricoides	g193/g251	312155.80	6215504.32	3	1
MRIP08	Lomatia myricoides	g194	312153.34	6215502.02	2	1
MRIP08	Lomatia myricoides	g195	312152.84	6215501.41	4	1
MRIP08	Lomatia myricoides	g196	312152.07	6215504.52	4	1
MRIP08	Lomatia myricoides	g197/g252	312152.98	6215506.22	3	1
MRIP08	Lomatia myricoides	g198	312152.86	6215510.83	3	1
MRIP08	Lomatia myricoides	g199	312155.06	6215513.72	4	1
MRIP08	Lomatia myricoides	g200	312154.85	6215515.81	5	1
		1 8				
MRIP08	Prostanthera linearis	h181	312179.02	6215457.71	3	1
MRIP08	Prostanthera linearis	h182	312179.39	6215459.68	1	1
MRIP08	Prostanthera linearis	h183	312168.89	6215506.53	3	1
MRIP08	Prostanthera linearis	h184/h196	312154.07	6215492.16	1	1
MRIP08	Prostanthera linearis	h185	312149.34	6215499.87	5	1
MRIP08	Prostanthera linearis	h186	312150.07	6215498.51	4	1
MRIP08	Prostanthera linearis	h187	312146.17	6215532.19	1	1
MRIP08	Prostanthera linearis	h188	312158.91	6215548.28	1	1
MRIP08	Prostanthera linearis	h189	312163.39	6215555.89	5	3
MRIP08	Prostanthera linearis	h190	312177.63	6215573.32	1	1
						1
MRIP08	Schoenus melanostachys	i181	312163.55	6215490.29	1	1
MRIP08	Schoenus melanostachys	i182	312165.00	6215499.22	5	1
MRIP08	Schoenus melanostachys	i183	312159.28	6215498.84	4	1
MRIP08	Schoenus melanostachys	i184	312153.13	6215527.03	1	1
MRIP08	Schoenus melanostachys	i185	312152.04	6215528.26	1	1
MRIP08	Schoenus melanostachys	i186	312151.98	6215531.69	1	1
MRIP08	Schoenus melanostachys	i187	312151.60	6215532.84	3	1
MRIP08	Schoenus melanostachys	i188	312151.39	6215534.11	3	1
MRIP08	Schoenus melanostachys	i189	312150.46	6215536.12	1	1
MRIP08	Schoenus melanostachys	i190	312148.53	6215536.56	3	1
MRIP08	Schoenus melanostachys	i191	312148.64	6215536.74	1	1
MRIP08	Schoenus melanostachys	i192	312147.77	6215538.52	1	2
MRIP08	Schoenus melanostachys	i193	312150.85	6215544.73	4	1
MRIP08	Schoenus melanostachys	i194	312147.86	6215546.04	3	2
MRIP08	Schoenus melanostachys	i195	312148.26	6215551.16	2	3
MRIP08	Schoenus melanostachys	i196	312172.89	6215491.21	5	1
	Schoenus melanostachys	i197	312172.32	6215502.96	5	3

Condition and Reproductive Rating for Riparian Indicator Species

	Species		Coord	linates		Reproductive
Site		Tag	Easting	Northing	Condition	Status
MRIP08	Schoenus melanostachys	i198	312169.93	6215505.14	1	1
MRIP08	Schoenus melanostachys	i199	312170.30	6215506.92	3	1
MRIP08	Schoenus melanostachys	i200	312170.30	6215509.63	5	1
WITTI OO	Schoenus merunostaenys	1200	312107.73	0213303.03		1
MRIP09	Lomatia myricoides	g41/g202	311423.68	6213567.45	5	3
MRIP09	Lomatia myricoides	g42/g203	311422.77	6213566.64	4	3
MRIP09	Lomatia myricoides	g43	311438.01	6213610.51	4	1
MRIP09	Lomatia myricoides	g44	311432.92	6213615.63	5	1
MRIP09	Lomatia myricoides	g45	311427.31	6213615.46	1	1
MRIP09	Lomatia myricoides	g46	311421.42	6213626.47	1	1
MRIP09	Lomatia myricoides	g47	311426.95	6213628.22	1	1
MRIP09	Lomatia myricoides	g48	311430.07	6213629.71	5	1
MRIP09	Lomatia myricoides	g49	311427.97	6213628.32	5	1
MRIP09	Lomatia myricoides	g50	311441.57	6213647.06	1	1
MRIP09	Lomatia myricoides	g51	311444.36	6213651.94	2	1
MRIP09	Lomatia myricoides	g52	311441.40	6213645.19	5	1
MRIP09	Lomatia myricoides	g53	311437.91	6213663.08	4	1
MRIP09	Lomatia myricoides	g54	311438.22	6213669.28	4	1
MRIP09	Lomatia myricoides	g55	311447.06	6213686.06	5	3
MRIP09	Lomatia myricoides	g56	311434.98	6213655.95	4	1
MRIP09	Lomatia myricoides	g57	311439.97	6213651.18	2	1
MRIP09	Lomatia myricoides	g58	311450.06	6213654.36	4	4
MRIP09	Lomatia myricoides	g59	311451.16	6213658.85	2	4
MRIP09	Lomatia myricoides	g60	311433.81	6213642.43	5	1
	,	1 0	I			
MRIP09	Prostanthera linearis	h41	311424.49	6213567.14	1	1
MRIP09	Prostanthera linearis	h42	311423.95	6213574.22	1	1
MRIP09	Prostanthera linearis	h43	311426.13	6213572.82	3	1
MRIP09	Prostanthera linearis	h44	311427.19	6213571.69	3	1
MRIP09	Prostanthera linearis	h45	311440.62	6213592.46	1	1
MRIP09	Prostanthera linearis	h46	311441.82	6213604.54	5	1
MRIP09	Prostanthera linearis	h47	311438.61	6213610.84	3	1
MRIP09	Prostanthera linearis	h48	311436.79	6213613.74	4	1
MRIP09	Prostanthera linearis	h49	311435.01	6213615.47	5	1
MRIP09	Prostanthera linearis	h50	311432.83	6213626.87	5	1
MRIP09	Prostanthera linearis	h51/h201	311431.15	6213629.20	1	1
MRIP09	Prostanthera linearis	h52	311430.28	6213629.74	3	1
MRIP09	Prostanthera linearis	h53	311428.16	6213629.63	1	1
MRIP09	Prostanthera linearis	h54	311432.64	6213631.15	1	1
MRIP09	Prostanthera linearis	h55	311432.15	6213637.11	3	1
MRIP09	Prostanthera linearis	h56	311446.54	6213651.86	1	1
MRIP09	Prostanthera linearis	h57	311446.24	6213652.32	1	1
MRIP09	Prostanthera linearis	h58	311442.51	6213647.59	3	1
MRIP09	Prostanthera linearis	h59	311438.84	6213665.94	5	1
MRIP09	Prostanthera linearis	h60	311438.12	6213669.43	1	1
			122.00.12		_	_
MRIP09	Schoenus melanostachys	i41	311424.94	6213571.37	3	4
MRIP09	Schoenus melanostachys	i42	311424.10	6213574.74	3	5
MRIP09	Schoenus melanostachys	i43	311430.49	6213580.51	3	2
.,,,,,,,	Jenochus melanostachys	173	311730.43	0213300.31		

Condition and Reproductive Rating for Riparian Indicator Species

	Species	Tag	Coord	linates		Reproductive
Site			Easting	Northing	Condition	Status
MRIP09	Schoenus melanostachys	i44	311432.28	6213580.27	2	2
MRIP09	Schoenus melanostachys	i45	311432.70	6213587.80	4	3
MRIP09	Schoenus melanostachys	i46	311437.12	6213595.98	3	3
MRIP09	Schoenus melanostachys	i47	311439.32	6213598.00	4	3
MRIP09	Schoenus melanostachys	i48	311440.79	6213603.98	3	2
MRIP09	Schoenus melanostachys	i49	311438.28	6213612.23	2	2
MRIP09	Schoenus melanostachys	i50	311428.96	6213614.90	1	1
MRIP09	Schoenus melanostachys	i51	311427.71	6213618.42	4	2
MRIP09	Schoenus melanostachys	i52	311430.75	6213628.60	3	1
MRIP09	Schoenus melanostachys	i53	311432.80	6213627.64	2	2
MRIP09	Schoenus melanostachys	i54	311432.82	6213630.80	3	1
MRIP09	Schoenus melanostachys	i55	311445.79	6213652.95	2	1
MRIP09	Schoenus melanostachys	156	311441.47	6213678.65	2	3
MRIP09	Schoenus melanostachys	157	311442.36	6213683.92	3	4
MRIP09	Schoenus melanostachys	i58	311444.67	6213654.76	1	1
MRIP09	Schoenus melanostachys	i59	311448.83	6213658.22	1	1
MRIP09	Schoenus melanostachys	i60	311422.48	6213646.12	3	1
		1 100				
MRIP10	Lomatia myricoides	g141	311145.93	6215581.65	4	1
MRIP10	Lomatia myricoides	g142	311138.53	6215591.28	4	3
MRIP10	Lomatia myricoides	g143	311136.08	6215601.18	5	3
MRIP10	Lomatia myricoides	g144	311134.45	6215603.96	4	4
MRIP10	Lomatia myricoides	g145	311129.75	6215610.34	5	1
MRIP10	Lomatia myricoides	g146	311128.79	6215613.61	5	4
MRIP10	Lomatia myricoides	g147	311121.36	6215626.16	5	3
MRIP10	Lomatia myricoides	g148	311117.61	6215631.09	4	2
MRIP10	Lomatia myricoides	g149	311100.59	6215637.36	5	1
MRIP10	Lomatia myricoides	g150	311098.18	6215646.19	4	1
MRIP10	Lomatia myricoides	g151/g206	311097.47	6215652.44	4	1
MRIP10	Lomatia myricoides	g152	311111.00	6215661.00	5	3
MRIP10	Lomatia myricoides	g153	311124.00	6215643.00	1	1
MRIP10	Lomatia myricoides	g154	311120.00	6215651.00	3	1
MRIP10	Lomatia myricoides	g155	311131.00	6215647.00	3	1
MRIP10	Lomatia myricoides	g156	311129.00	6215639.00	5	1
MRIP10	Lomatia myricoides	g157	311130.00	6215639.00	5	1
MRIP10	Lomatia myricoides	g158	311129.00	6215635.00	4	1
MRIP10	Lomatia myricoides	g159	311141.00	6215629.00	5	1
MRIP10	Lomatia myricoides	g160	311146.00	6215622.00	2	1
	, ,	1 0 11				1
MRIP10	Prostanthera linearis	h141	311151.15	6215567.38	1	1
MRIP10	Prostanthera linearis	h142	311147.66	6215565.51	1	1
MRIP10	Prostanthera linearis	h143	311149.40	6215572.19	4	4
MRIP10	Prostanthera linearis	h144	311146.25	6215574.29	1	1
MRIP10	Prostanthera linearis	h145	311135.96	6215591.55	1	1
MRIP10	Prostanthera linearis	h146	311134.85	6215587.90	3	2
MRIP10	Prostanthera linearis	h147	311123.30	6215616.34	1	1
MRIP10	Prostanthera linearis	h148	311114.93	6215630.12	1	1
MRIP10	Prostanthera linearis	h149	311102.96	6215636.98	1	1
MRIP10	Prostanthera linearis	h150	311128.00	6215649.00	1	1
10		11230	311120.00	3213043.00	_	_

Condition and Reproductive Rating for Riparian Indicator Species

		_	Coordinates			Reproductive
Site	Species	Tag	Easting	Northing	Condition	Status
MRIP10	Prostanthera linearis	h151	311133.00	6215651.00	1	1
MRIP10	Prostanthera linearis	h152	311133.00	6215646.00	1	1
MRIP10	Prostanthera linearis	h153	311128.00	6215638.00	1	1
MRIP10	Prostanthera linearis	h154	311132.00	6215635.00	1	1
MRIP10	Prostanthera linearis	h155	311139.00	6215629.00	1	1
MRIP10	Prostanthera linearis	h156	311134.00	6215624.00	1	1
MRIP10	Prostanthera linearis	h157	311145.00	6215623.00	1	1
MRIP10	Prostanthera linearis	h158	311143.00	6215620.00	1	1
MRIP10	Prostanthera linearis	h159	311126.00	6215618.00	1	1
MRIP10	Prostanthera linearis	h160	311125.00	6215608.00	1	1
MRIP10	Schoenus melanostachys	i141/i203	311153.01	6215565.92	3	1
MRIP10	Schoenus melanostachys	i142	311136.15	6215601.71	4	1
MRIP10	Schoenus melanostachys	i143	311135.33	6215603.34	2	1
MRIP10	Schoenus melanostachys	i144	311132.73	6215609.57	2	1
MRIP10	Schoenus melanostachys	i145	311134.98	6215587.70	1	1
MRIP10	Schoenus melanostachys	i146	311129.79	6215612.52	1	1
MRIP10	Schoenus melanostachys	i147	311117.12	6215630.11	2	1
MRIP10	Schoenus melanostachys	i148	311116.61	6215630.60	2	1
MRIP10	Schoenus melanostachys	i149	311105.74	6215650.40	3	1
MRIP10	Schoenus melanostachys	i150	311093.09	6215653.73	1	1
MRIP10	Schoenus melanostachys	i151	311099.20	6215673.72	5	5
MRIP10	Schoenus melanostachys	i152	311115.34	6215670.38	1	1
MRIP10	Schoenus melanostachys	i153	311120.00	6215652.00	2	2
MRIP10	Schoenus melanostachys	i154	311133.00	6215636.00	1	1
MRIP10	Schoenus melanostachys	i155	311132.00	6215632.00	3	2
MRIP10	Schoenus melanostachys	i156	311136.00	6215626.00	3	2
MRIP10	Schoenus melanostachys	i157	311151.00	6215552.00	4	2
MRIP10	Schoenus melanostachys	i158	311157.00	6215552.00	1	1
MRIP10	Schoenus melanostachys	i159	311159.00	6215551.00	1	1
MRIP10	Schoenus melanostachys	i160	311168.00	6215559.00	1	1

NB: Shaded rows indicate dead individuals

Condition Scale:

- 1 = severe damage/dieback
- 2 = many dead stems
- 3 = some dead branches
- 4 = minor damage
- 5 = healthy

Reproductive Status:

- 1 = ni
- 2 = sparse (occasional flowers only)
- 3 = low (under 25 percent of potential)
- 4 = moderate (25 to 75 percent of potential)
- 5 = high (over 75 percent of potential flowering)

© ECO LOGICAL AUSTRALIA PTY LTD

140



